


Revision History







2026-01-26 0.1 Disconnected 3.3V from Enable (pins 9 & 13) on transceiver U100.
Connected U100 Enable to PB11 (pin 30) on stm32 U1 with signal PB11_TRUCK_COMM_EN.
Added solder pad, 10K R102 and jumper JP100 to input of schmitt trigger U101a. Jumper selects pull-up or pull-down resistor.
Connected U70 -INTod to PB10 (pin 29) on stm32 U1.

MCU

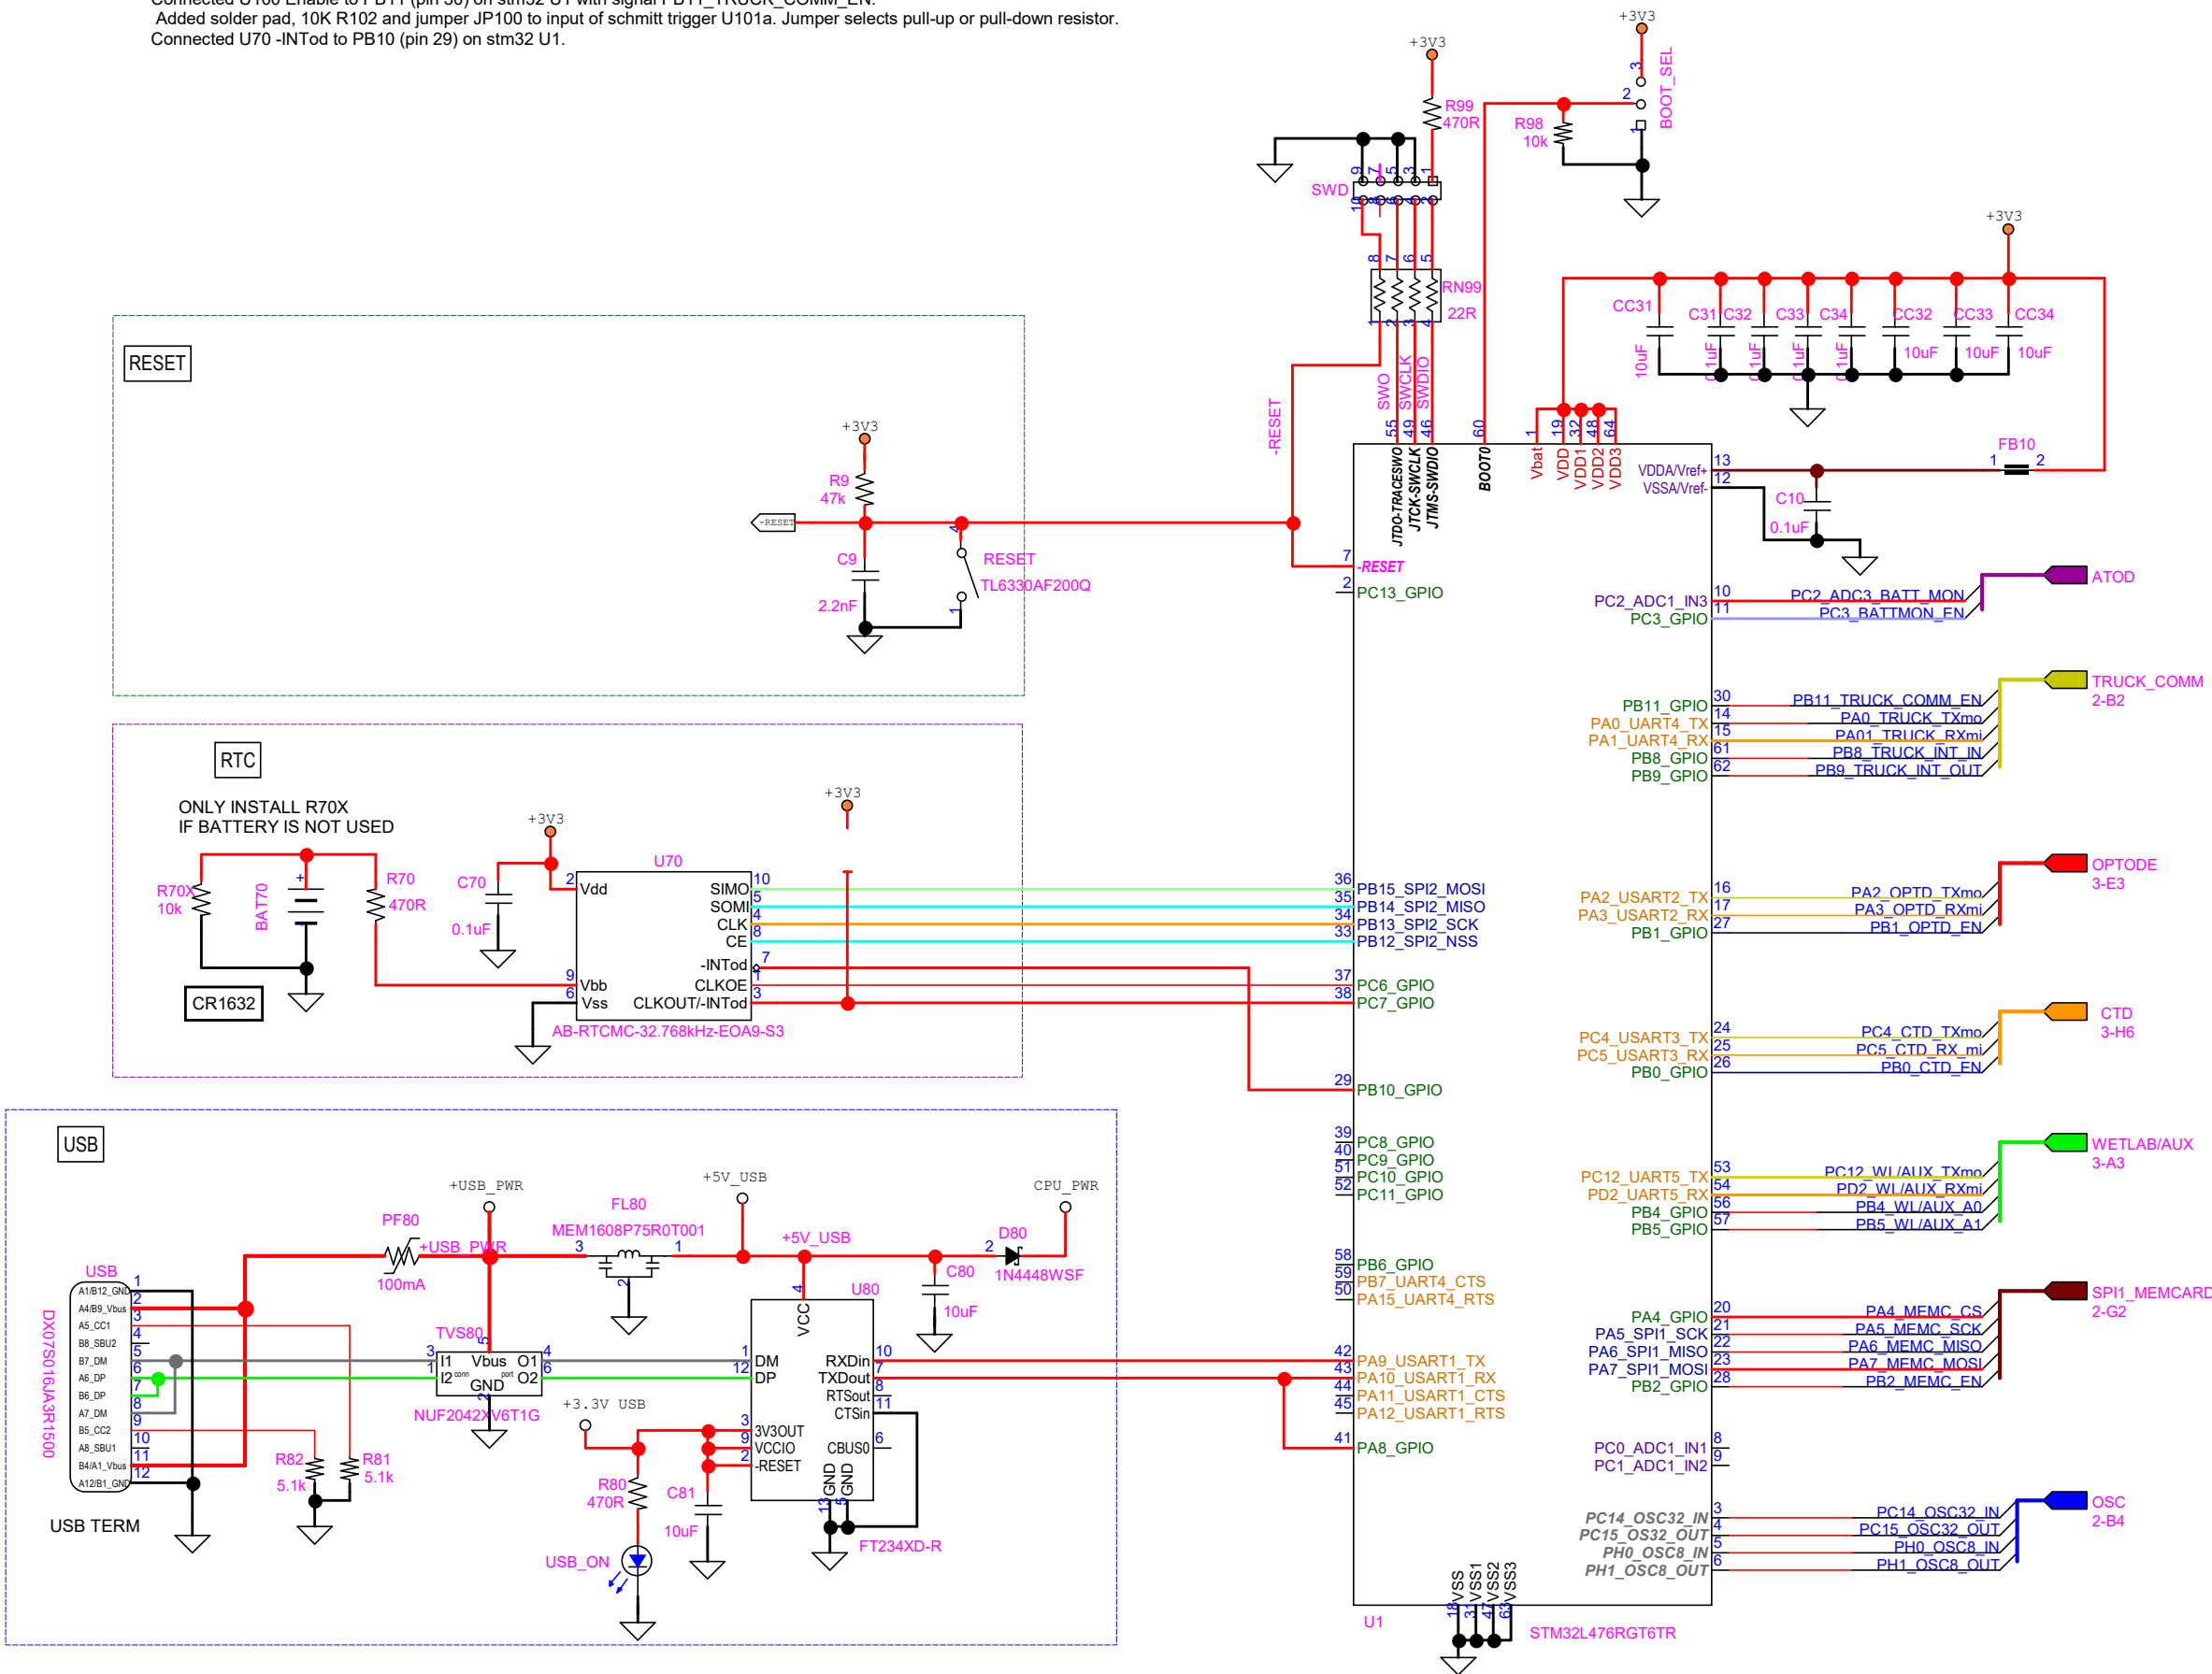






NOAA-PMEL-EDD 7600 Sand Point Way NE Seattle, WA 98115 205.526.6726		
PROJECT PRAWLER SCI ARM 0.1		
COMPONENT MCU		
FILE		
DATE 2/25/2025	DESIGNED BY SES	DRAWN BY DKT

POWER MEMCARD OSCILLATOR

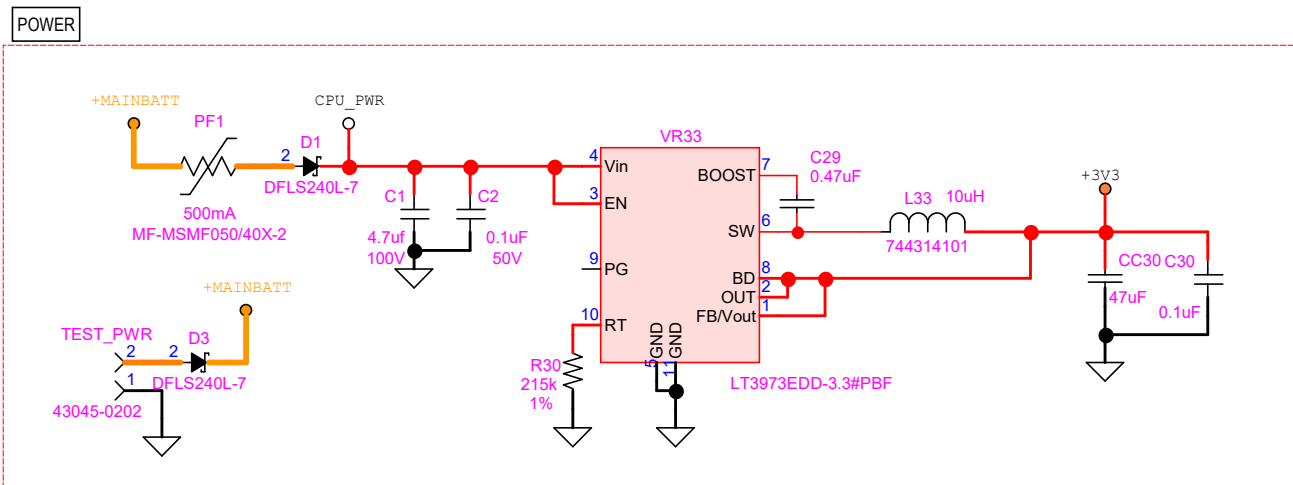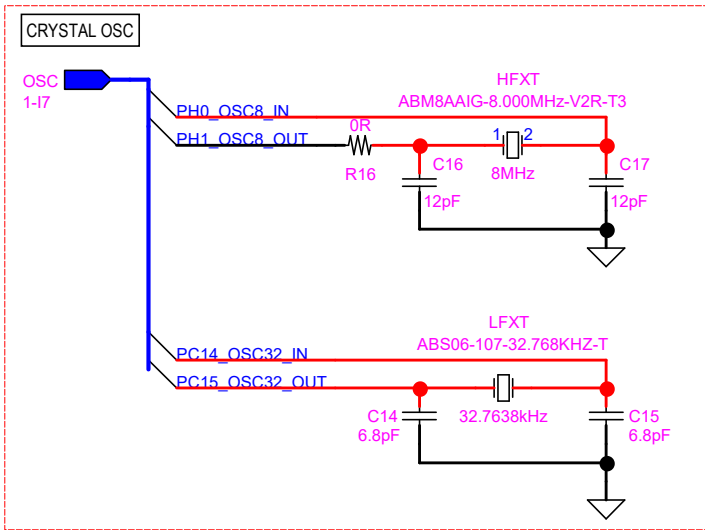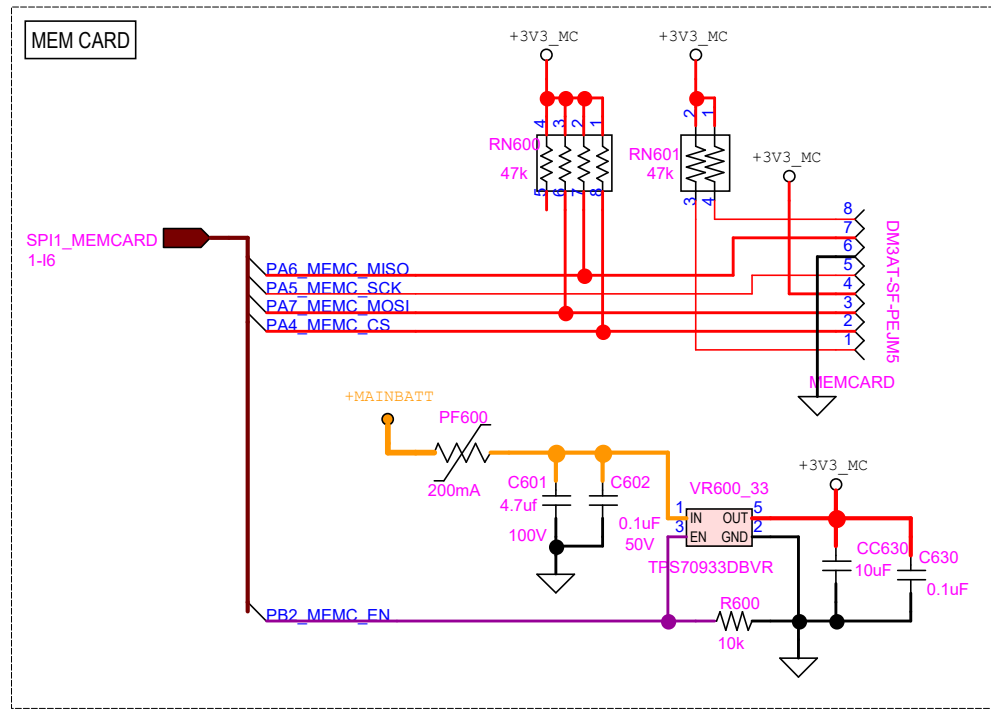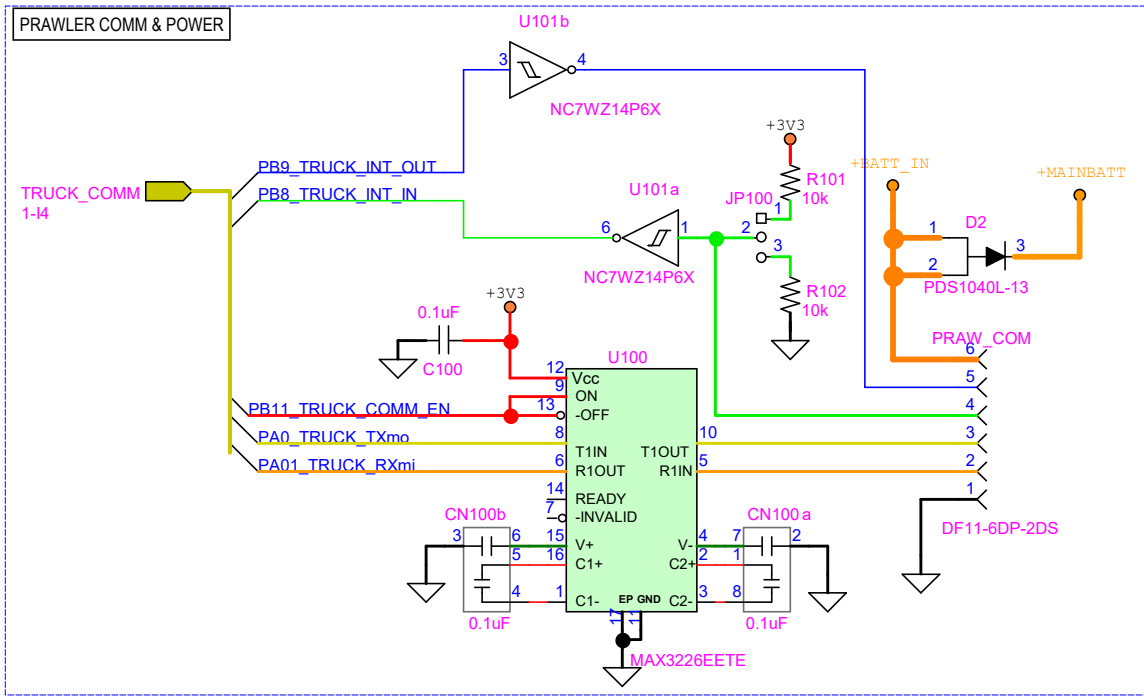

NOAA-PMEL-EDD 7600 Sand Point Way NE Seattle, WA 98115 205.526.6726		
PROJECT		
PRAWLER SCI ARM 0.1		
COMPONENT		
POWER MEMCARD OSCILLATOR		
FILE		
DATE	DESIGNED BY	DRAWN BY
2/25/2005	SES	DKT

OPTODE CTD WETLAB

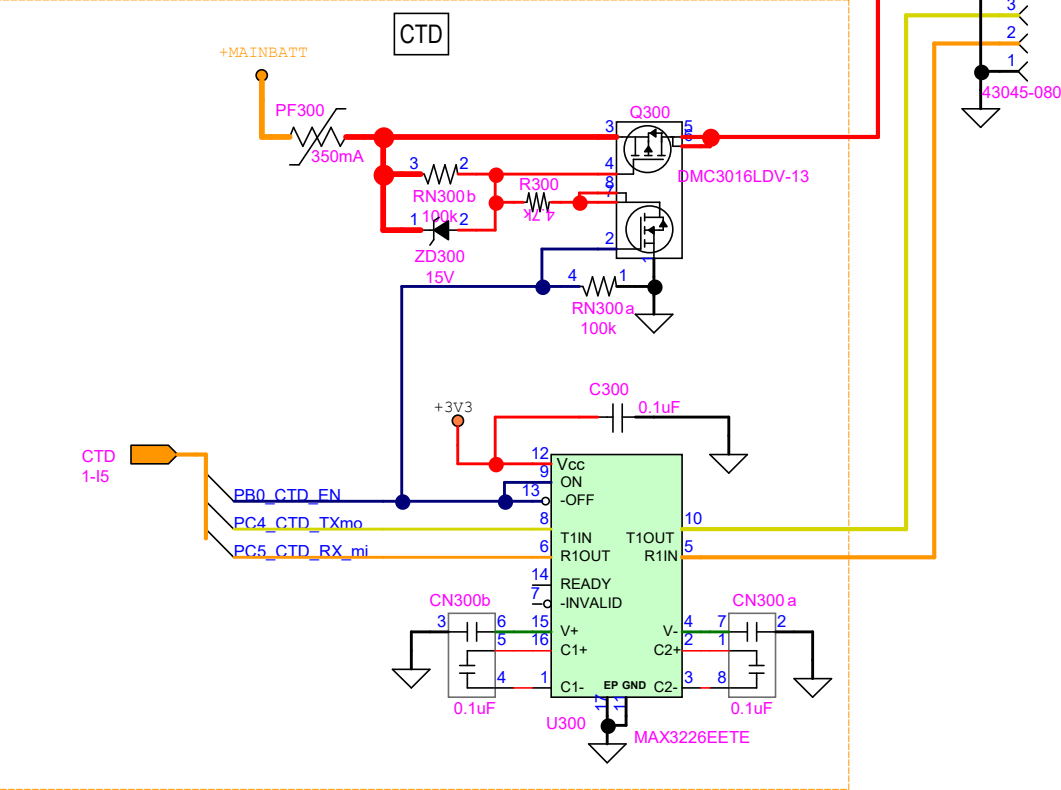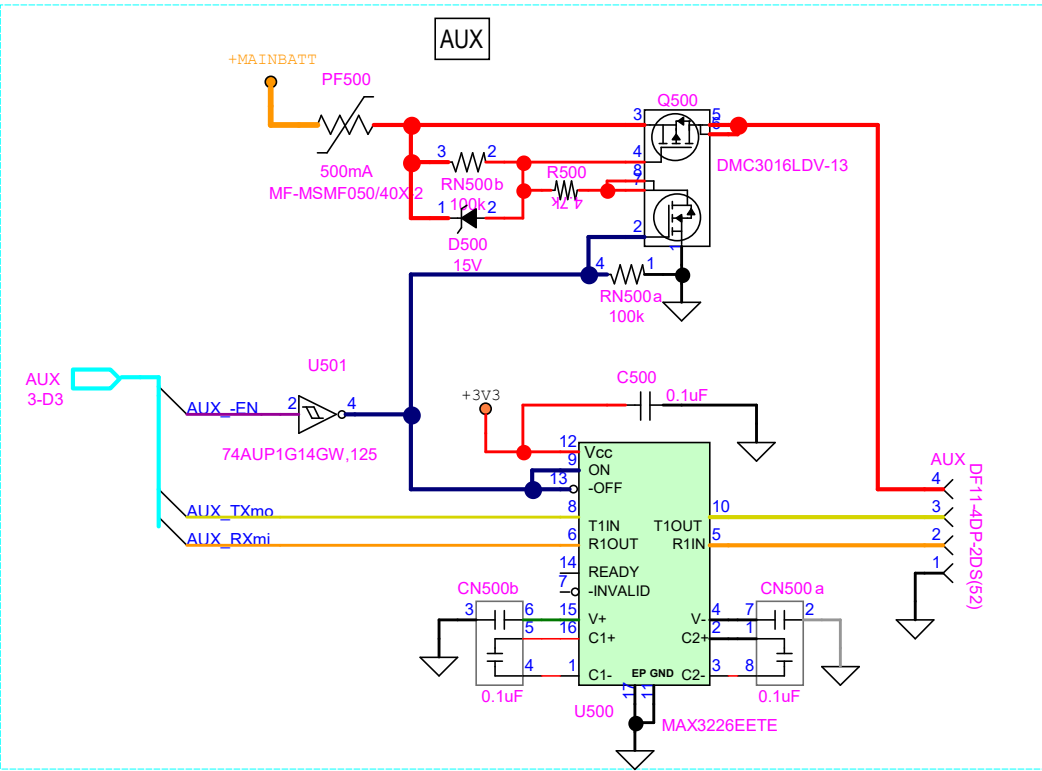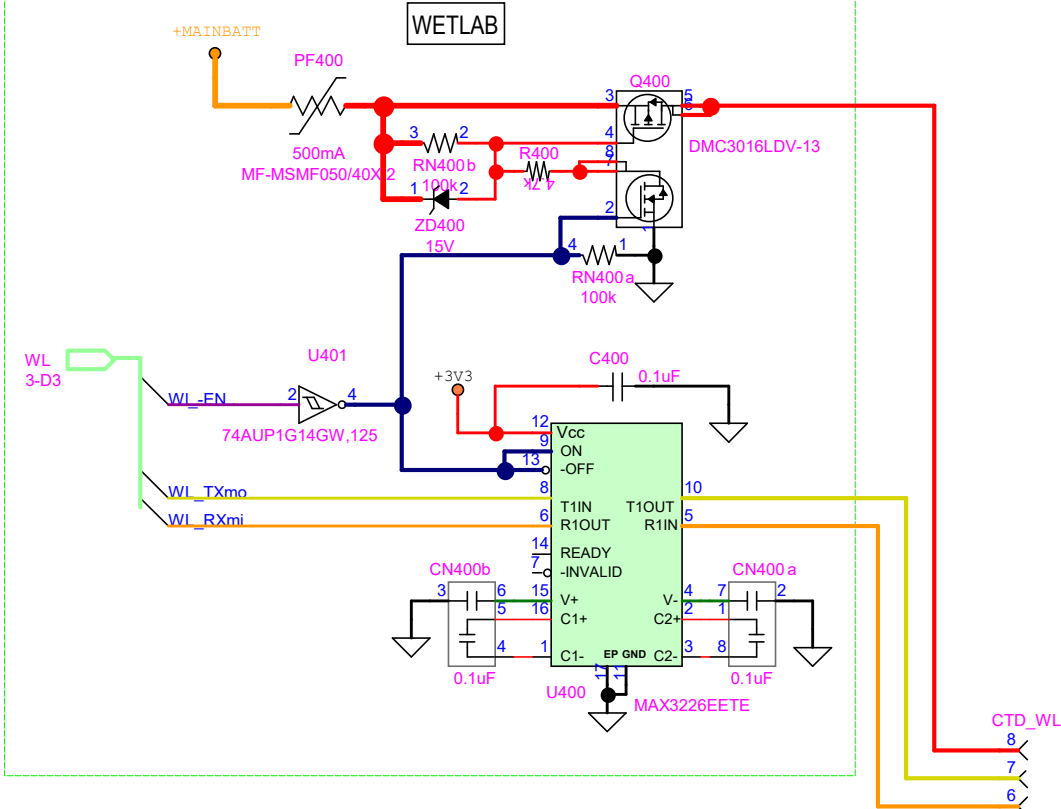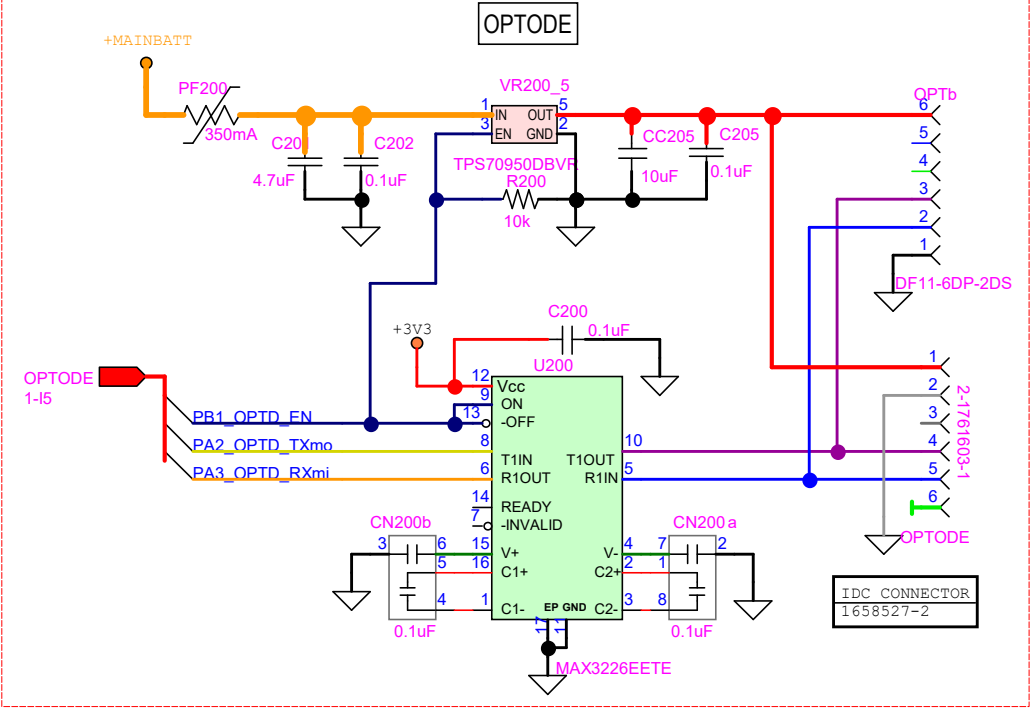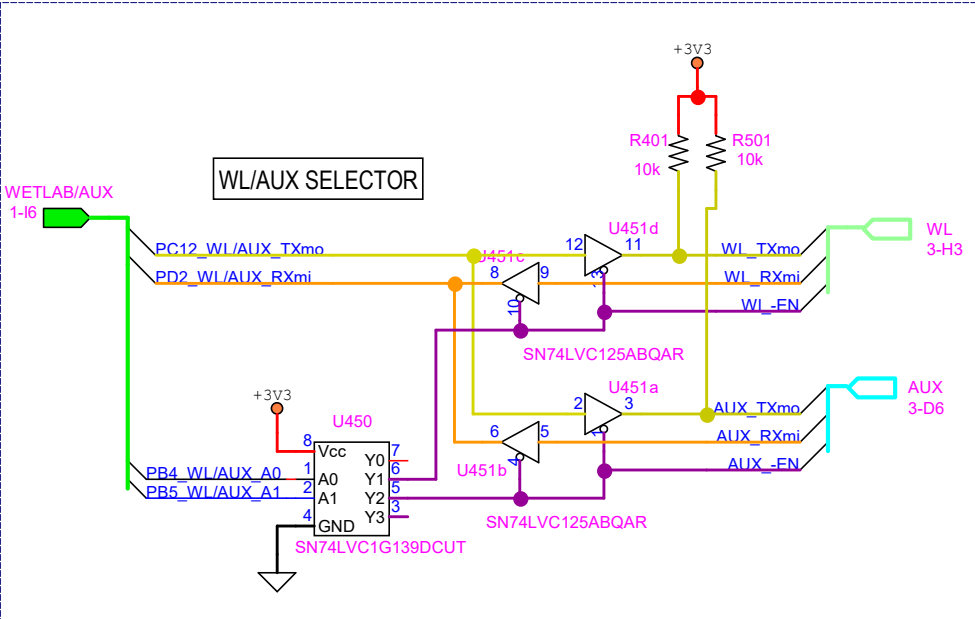

NOAA-PMEL-EDD		
7600 Sand Point Way NE		
Seattle, WA 98115		
205.526.6726		
PROJECT		
PRAWLER SCI ARM 0.1		
COMPONENT		
OPTODE CTD WETLAB AUX		
FILE		
DATE	DESIGNED BY	DRAWN BY
2/25/2025	SES	DKT