

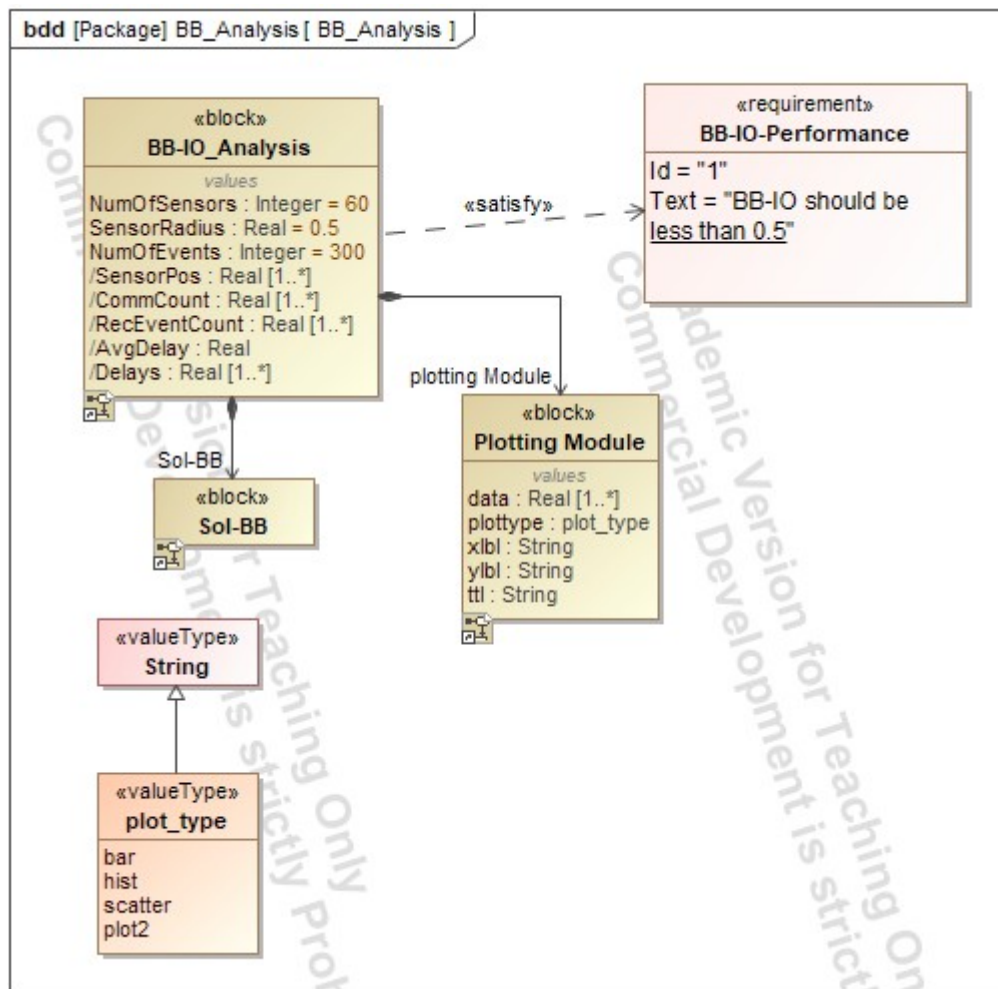


Figure 1. Block definition diagram of the BB Analysis system.

Block definition diagram showing the BB-IO Analysis, Sol-BB, and Plotting Module blocks, their properties and relationships, the performance requirement, and the available plot types.

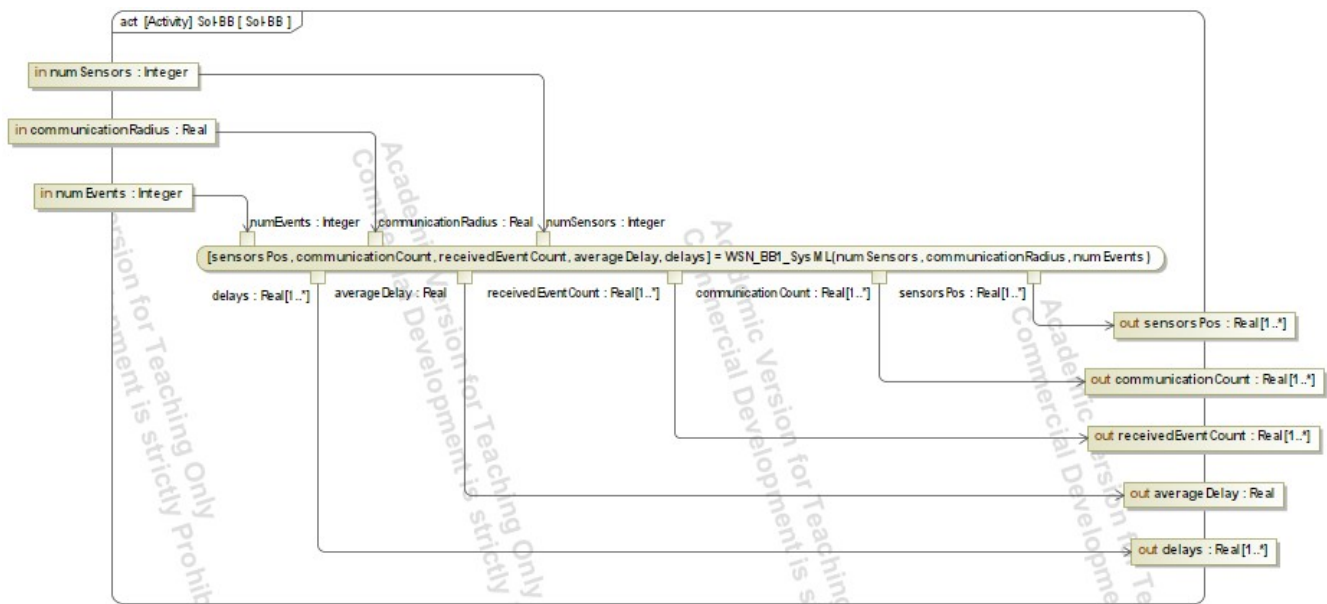


Figure 3. Activity diagram of the Sol-BB system of interest.

Activity model showing the inputs to the Sol-BB system, including the number of sensors, communication radius, and number of events, and the resulting sensor positions, communication counts, received-event counts, average delay, and delays.

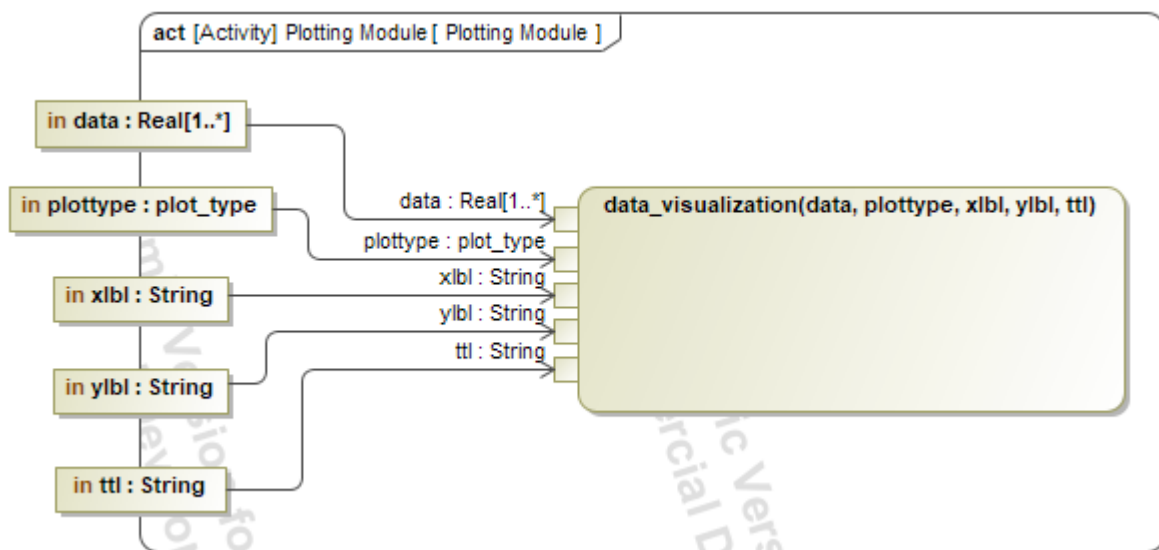


Figure 4. Activity diagram of the Plotting Module.

Activity model showing how input data and plotting parameters are passed to the visualization function to generate the specified plot.

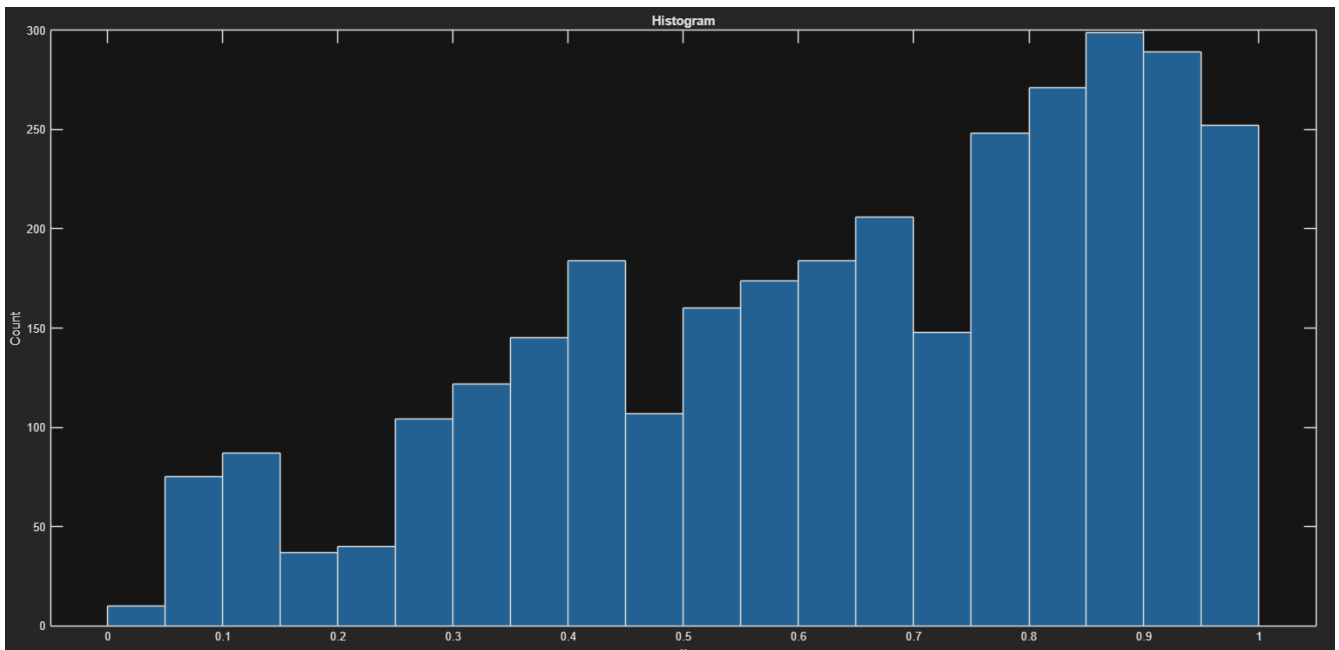


Figure 5. Histogram of simulation results.
Distribution of the analyzed simulation values, showing the frequency of observations across the range from 0 to 1.

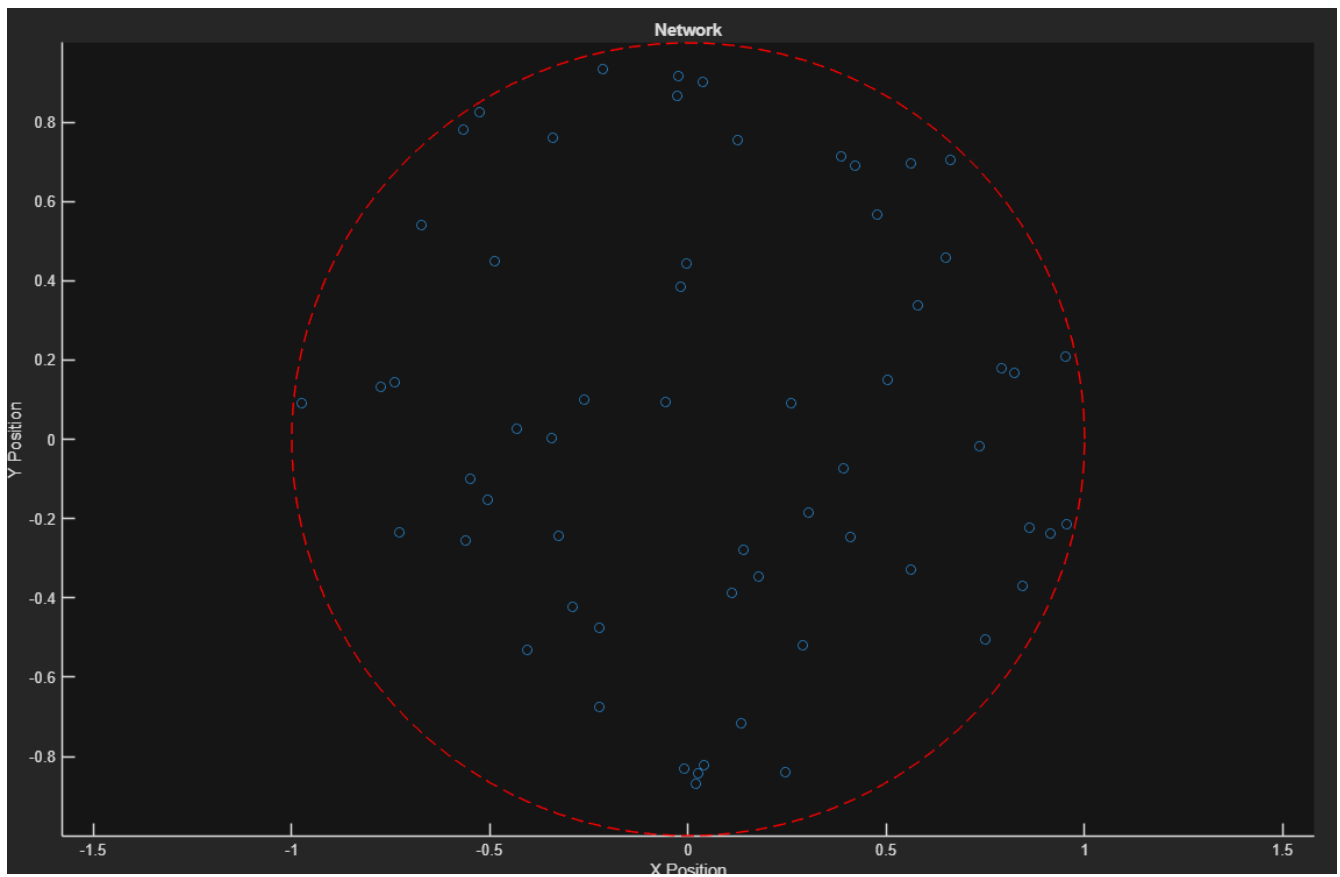


Figure 6. Network topology and sensor positions.
Spatial distribution of sensor nodes within the defined network area, with the dashed circle representing the communication boundary.

#	Name	 NumOfSensors : Integer	 SensorRadius : Real	 NumOfEvents : Integer	  AvgDelay : Real
1	 bb-io_analysis_B	50	0.5	100	0.6363
2	 bb-io_analysis_C	70	0.5	200	0.6365
3	 bb-io_analysis_A	60	0.5	300	0.6531

Figure 7. BB-IO Analysis instance data.

Instance data showing the configured numbers of sensors, sensor radius, number of events, and corresponding average-delay values for the analyzed BB-IO Analysis configurations.