

# Optimizing Envoy’s Network Stack with Kmap

Joshua Levin  
Brown University

Peter Cho  
Brown University

## 1 Introduction

The development of the microservice and servicemesh has brought the sidecar container to the forefront of distributed services. These sidecars provide shared features among services deployed on the servicemesh. However, these sidecars are often interjected in a service-agnostic way by modifying iptables to redirect network communication through the sidecars. This process can introduce significant latency to responses. Istio has benchmarked Envoy to add between 5-10ms to response latencies on average for small to medium sized meshes ( $\leq 16$  concurrent connections) [1]. We focus on the Envoy [3] sidecar used by the Istio [6] servicemesh.

We present Kmap as an alternative library loaded via LD\_PRELOAD using shared memory to optimize data communication between processes. Our work focuses on two key aspects:

1. Building an efficient data path between Envoy and services
2. Developing a robust API which mirrors classic POSIX sockets, which most common languages and tools use for interacting with the kernel stacks

Our initial prototype explores challenges and design paths for the development of Kmap. We highlight challenges for implementing Kmap for production network systems. Then, we present our prototype working on sample C/C++ webserver.

## 2 Background

Recent shifts to microservice architectures and the resulting servicemesh have prioritized development and deployment efficiency over performance. Microservices deployed on a servicemesh (i.e. Istio [6]) use proxies which are co-located with microservices. These proxies intercept and control networking communication between services. The proxies are relatively lightweight, but use the networking stack for communication with the co-located service (Figure-3). They do

this to preserve a common interface for services– the networking stack. Istio uses Envoy [3] which is the tool we focus on here for Kmap.

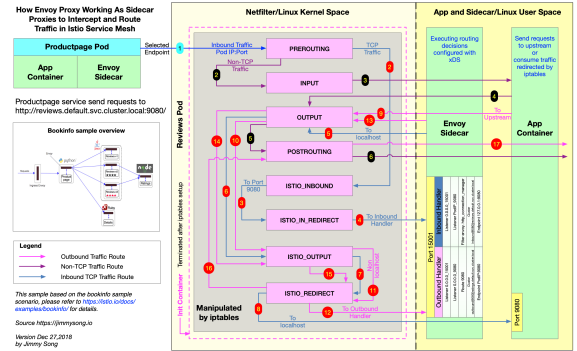


Figure 1: Envoy Network Stack [10]

## 3 Kmap

Our design for Kmap focus on avoiding costly, unnecessary invocations of the network stack. These network calls involve copying of bytes between two processes and kernel context switches. Avoiding the extraneous copying and reducing the frequency of context switches should greatly improve data transfer speed. Envoy prides itself on being application agnostic, which leads to the helpful ability to auto-inject Envoy into microservices. However, this abstraction results in unnecessary invocations of the network stack. In Figure-3 we highlight in red all the calls to the network stack for the path of a single request. Then, in Figure-2 we show the reduction in those calls by using Kmap instead of the network stack for local data transfer.

Kmap works by using LD\_PRELOAD to load Kmap before libc regular calls. Kmap contains several functions which match the signature of libc network calls and thus when applications invoke those calls, Kmap’s version of those functions

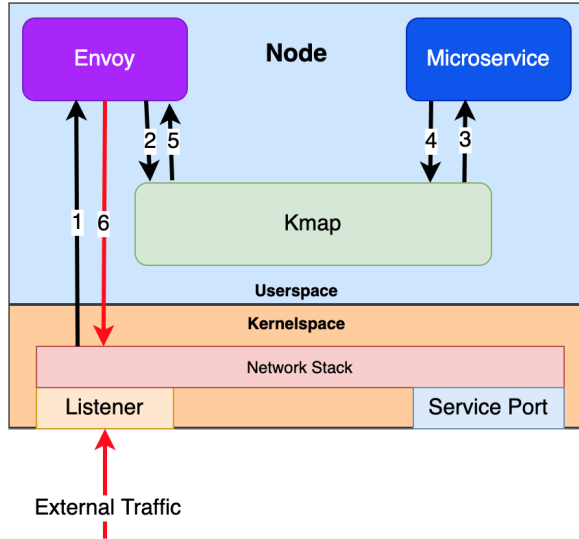


Figure 2: Kmap

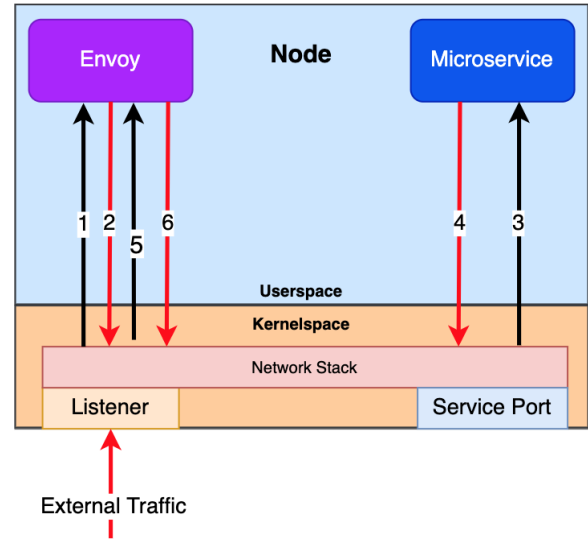


Figure 3: No Kmap Envoy Network Stack

is invoked instead of `libc`. Using the Kmap functions, Envoy and the microservice call read and write passing data through userspace rather than passing the data into the network stack, using shared buffers to efficiently transfer the data. Thus, we must load the shared library for both the Envoy sidecar and the microservices. The two critical challenges to realizing Kmap are:

1. Building a robust, efficient shared buffer system that's *faster* than the network stack
2. Determining in a microservice-agnostic way which POSIX network calls should be preloaded by Kmap

### 3.1 Intercepting Network Calls

**Direct `libc` Modification:** One method of implementing Kmap would be to modify `libc` in environment for Envoy and the service. This option, however, would require extensive infrastructure modification to ensuring Envoy and the service each boot with the proper `libc` version (compiled for them). Further, the library change would effect any other process running the in the same environment (container or system) and thus Kmap would have to handle calls from neither Envoy or the service.

**LD\_PRELOAD:** The Linux `LD_PRELOAD` command [7] allows users to preload particular libraries ahead of the conventional linker and loader. This enables users to load symbols before classic libraries (e.g. `libc`, `syscalls`). Commonly this is referred to as the "LD\_PRELOAD trick" [2]. The `LD_PRELOAD` command modifies the linking process of the particular process it is attached to, requiring no modification of the default library and not interfering with any other process.

For Kmap, we use `LD_PRELOAD` to load the Kmap libraries before conventional libraries such as `libc`. Inside each Kmap library we use `dlsym` to load the "real" `libc` functions we wrap. Thus, we can use `libc` functions in Kmap, passing through most calls, while intercepting and adjusting only the subset relevant to Kmap. From a maintainability perspective, this allows `libc` and Kmap to evolve independently while remaining compatible.

### 3.2 Pipe options

Here, we outline potential methods for implementing the buffer Kmap uses to pass data between Envoy and the microservice.

**Named Pipes:** Named pipes, (FIFO) are blocking, uni-directional I/O buffers for passing data between two processes. The pipe must be opened for both reading and writing before being written two. Named pipes are traditionally slow, only offering slight speed advantages over TCP [5]. Further, they are un-directional which makes them less accessible or interchangeable compared to TCP.

**Unnamed Pipes:** Unnamed pipes are slightly faster than Named pipes, but are created per-process. They traditionally are used when a process forks, as they both will share a reference to the pipe. This makes them particularly tricky to implement across two independent processes and thus unhelpful for Kmap.

**Shared Memory:** Shared memory is a robust API which allows processes to share use of a memory region (`shm_open`). This requires mapping the same underlying memory region into the virtual memory of each process (`mmap`). Shared memory is concretely faster than pipes and the primary API Kmap uses for communicating information. Shared memory has

been benchmarked to be 170 times faster than TCP sockets for communicating information between processes [5]. However, shared memory does not directly provide a buffer interface like TCP, and so Kmap must implement that as part of its library.

### 3.3 Dual Pipes

Since Kmap mirrors the network stack for two unique clients, Envoy and the service, we must implement two circular buffers. These buffers are unidirectional, providing read/write direction for each service. A core function of the POSIX network stack is blocking write and reads using syscalls like *select* and *epoll*. As such, we use dedicated synchronization for each buffer using pthread mutexes and conditional variables. We display these aspects of Kmap in Figure-4

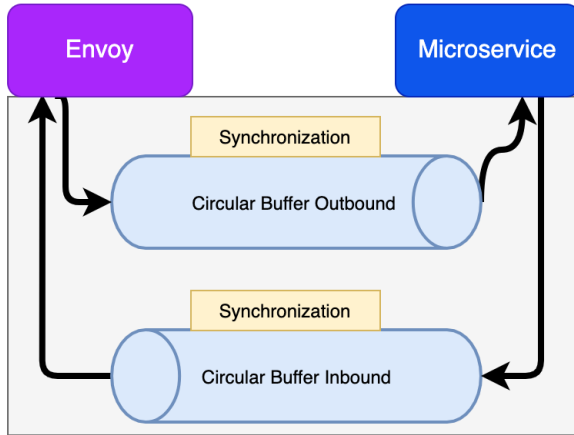


Figure 4: Kmap Design

### 3.4 When to apply Kmap

The network stack has a very well defined, robust API commonly called POSIX sockets. A particular challenge for Kmap is pre-loading in front of these network calls and knowing when to pass through the call, or when to route to the local buffer. Since Kmap is designing primarily for Envoy, we use information about how it communicates with microservices to determine which file descriptors should use Kmap. The Envoy codebase uses unique handlers for different requests (e.g. gRPC, TCP, HTTP 2, HTTP 3, QUIC) and as such Kmap will have to adjust its structure to match the protocol in use. For now the focus of our Kmap prototype, discussed in Section-4 is Envoy's HTTP stack. We do not view Kmap as generalizable to other Envoy paths or other tools (e.g. Linkerd) without thorough inspections of the pathways. It is likely for Kmap to generalize it would require the tool and path as part of its compilation process.

## 4 Prototype

Here, we discuss our current prototype, challenges, and target applications. Currently we compile a single shared object ({envoy,service}.so) for each side using compiler flags. It is imperative we intercept syscalls on each side, and as such we must know which side of communication the library is running on to determine which network calls to intercept. Our library is written in C and is approximately 800 LOC.

### 4.1 Kmap Buffer

The implementation started with named pipe as the main Inter-Process Communication (IPC) mechanism. However, due to its unidirectional nature and difficulty in incorporating synchronization mechanisms, we decided the named pipes will not suffice.

As a solution, we used `shm_open(2)` to open a file descriptor associated with a region of shared memory and map it to the process using the `mmap` syscall. We allocate a circular buffer of size  $2^{24}$  bytes in this shared region and read and write from it directly using `memcpy`. We will discuss our choice of the buffer size and how it affects the performance in later section. We allocate two such buffers to provide communication in each direction.

### 4.2 Concurrency Challenges

The Envoy process will write the outer request to the buffer and read the service response from the buffer; the service process will read the request (passed on by Envoy) and write the response, as returned by the service. We now have a classic producer-consumer problem.

Our first attempt at the solution was semaphore. We allocated two semaphores, each associated with one buffer, for the purpose of waiting and notifying. However, semaphores did not provide a convenient way to guarantee exclusive access to the buffer. This allowed for data races and caused the program to malfunction.

As an improvement, we moved to using mutexes across processes. Each buffer has a mutex associated with it and also a condition variable. We use these two constructs to guarantee mutual exclusion and to solve the consumer-producer problem.

Function	Envoy	Service
connect	X	
accept		X
write	X	X
read	X	X
writenv	X	
readv	X	

Table 1: Libc Functions Preloaded (Tiny C Webserver)

### 4.3 Kmap Network Calls

The most challenging aspect of Kmap’s design is properly intercepting and replicating the behavior of network system calls. This aspect is especially challenging because Envoy uses unique handlers for request types (UDP, TCP, HTTP{1,2,3}, gRPC, Quic). Further, the service itself may use the network stack in obtuse ways. To make Kmap generalizable, one would truly have to intercept every network call (or possible network related).

This task is enormous. Take for example, how services often take advantage of configurable aspects of the network stack like *setsockopt*. Setting options on a particular socket changes the behavior of accept, i/o, and more. For example, our investigation of Flask [4] revealed that it does not call *accept* for new connections. Thus, for Kmap to properly mirror the POSIX API to services in an agnostic way, it would have to model the entire state diagram for sockets.

For our prototype we have focused on HTTP. In our prototype, a service user would contact Envoy with an HTTP GET request. Envoy uses *readv* and *writetv* in order to read from and write to multiple file descriptors at the same time. Our tiny C server [9] uses low level file IO system calls (e.g. *read* and *write*). We summarized the intercepted network syscalls in Table-1.

### 4.4 Initialization

We use the GCC feature `__attribute__((constructor))` to tell GCC to compile our library such that before any functions are invoked we can load kmap. The memory allocation can take a second or two depending on the size of memory allocated. Thus, we run initialization/mapping functions for each side via the constructor, rather than on invocation. This also helps optimize performance by not requiring runtime initialization checks on the functions.

## 5 Related Work

**NetKernel:** [8] This work focuses on moving optimizing the network stack by moving it out of the kernel. The impetus was in the VM-age, ripping the kernel out of the VM itself provides more control and optimization for users. Their improvements include shared memory. In their work (Section 4.1) they discuss the use of LD\_PRELOAD for transport socket redirection. For their usecase, LD\_PRELOAD was not robust enough and required too many mappings. However, we see that for Kmap the transport socket redirection should be sufficient.

**Slim (OS):** [11] SlimOS addresses performance challenges within the container network stack. Similar to Kmap, they at-

tempt to avoid traveling the virtualized network stack and directly preceding through the host network interface. They work works at a lower abstraction level than Kmap but employs a similar principal. SlimOS dynamically links its user-space library onto of containers using LD\_PRELOAD on unmodified application binaries.

## References

- [1] Best practices: Benchmarking service mesh performance. <https://istio.io/blog/2019/performance-best-practices/>.
- [2] Correct usage of *ld\_preload* for hooking *libc* functions. <https://tbrindus.ca/correct-ld-preload-hooking-libc/>.
- [3] Envoy proxy - home. <https://www.envoyproxy.io/>.
- [4] Flask. <https://flask.palletsprojects.com/en/1.1.x/>.
- [5] Ipc performance. <https://stackoverflow.com/questions/1235958/ipc-performance-named-pipe-vs-socket/54164058#54164058>.
- [6] Istio. <https://istio.io/>.
- [7] *Ld\_preload* documentation. <http://man7.org/linux/man-pages/man8/ld.so.8.html>.
- [8] NIU, Z., XU, H., HAN, D., CHENG, P., XIONG, Y., CHEN, G., AND WINSTEIN, K. Network stack as a service in the cloud. In *Proceedings of the 16th ACM Workshop on Hot Topics in Networks* (New York, NY, USA, 2017), HotNets-XVI, Association for Computing Machinery, p. 65–71.
- [9] O’HALLARON, D. tiny web server. <http://csapp.cs.cmu.edu/2e/ics2/code/netp/tiny/tiny.c>.
- [10] SONG, J. <https://jimmysong.io/>.
- [11] ZHUO, D., ZHANG, K., ZHU, Y., LIU, H. H., ROCKETT, M., KRISHNAMURTHY, A., AND ANDERSON, T. Slim: OS kernel support for a low-overhead container overlay network. In *16th USENIX Symposium on Networked Systems Design and Implementation (NSDI 19)* (Boston, MA, Feb. 2019), USENIX Association, pp. 331–344.

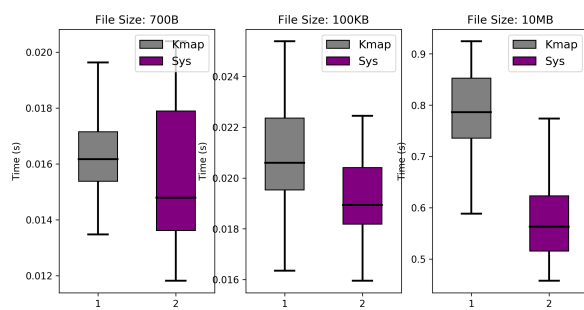


Figure 5: Time to Transfer

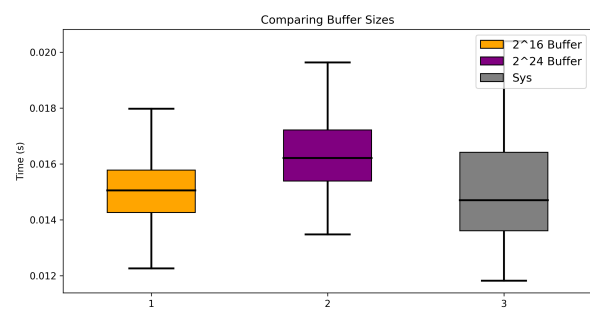


Figure 6: Comparing Kmap Buffer Sizes