



RMSE: by estimator family (Fixed Policy)

This atlas treats the disturbance as an amplitude-only step: the true frequency remains nominal, so reported frequency and ROCOF errors quantify magnitude-step cross-sensitivity, numerical robustness, and tracking stability rather than formal PMU magnitude-step compliance. The 1-1000% schedule combines standard-like voltage perturbations, grid and IBR ride-through stress, and high-amplitude current/fault surrogates; horizontal lines are engineering guide thresholds, not IEEE compliance limits. Fixed-policy mode: one parameter set per estimator is reused across all amplitudes.


Reference Amplitude Step

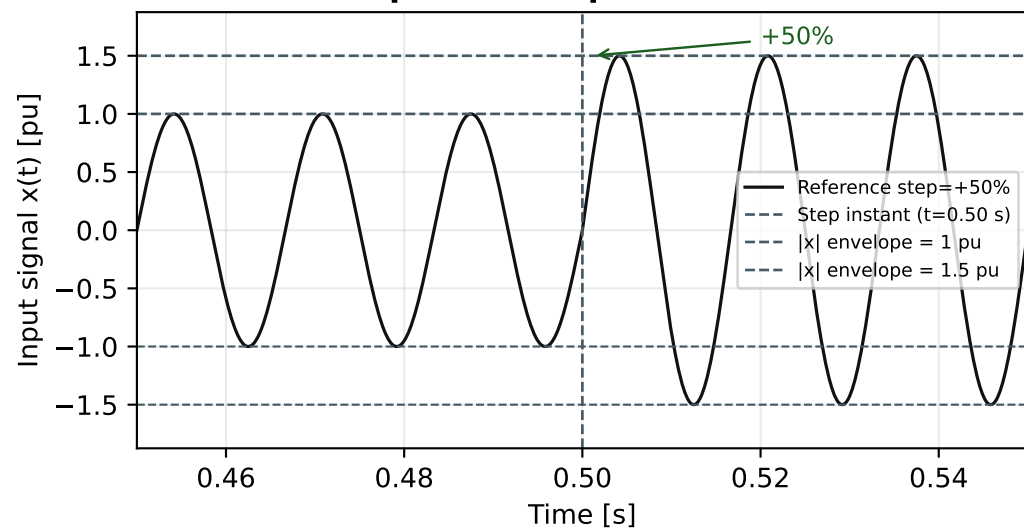


Reference Frequency $f(t)$

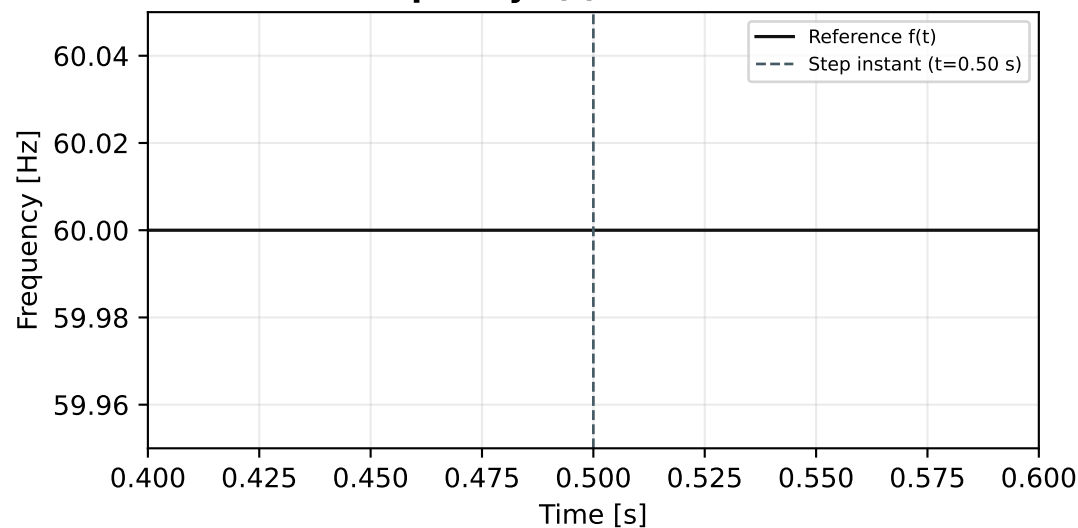


Loop-based

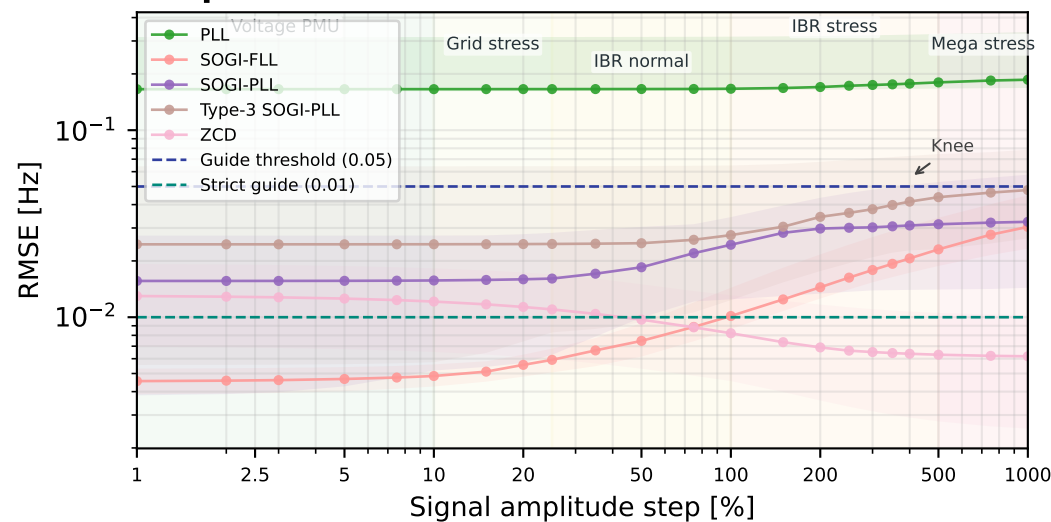

Model-based

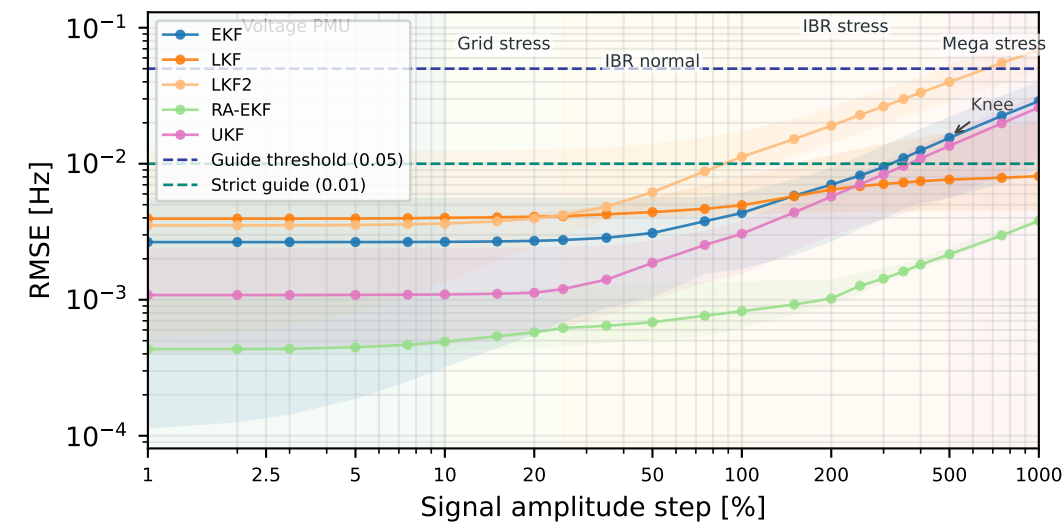

Window-based

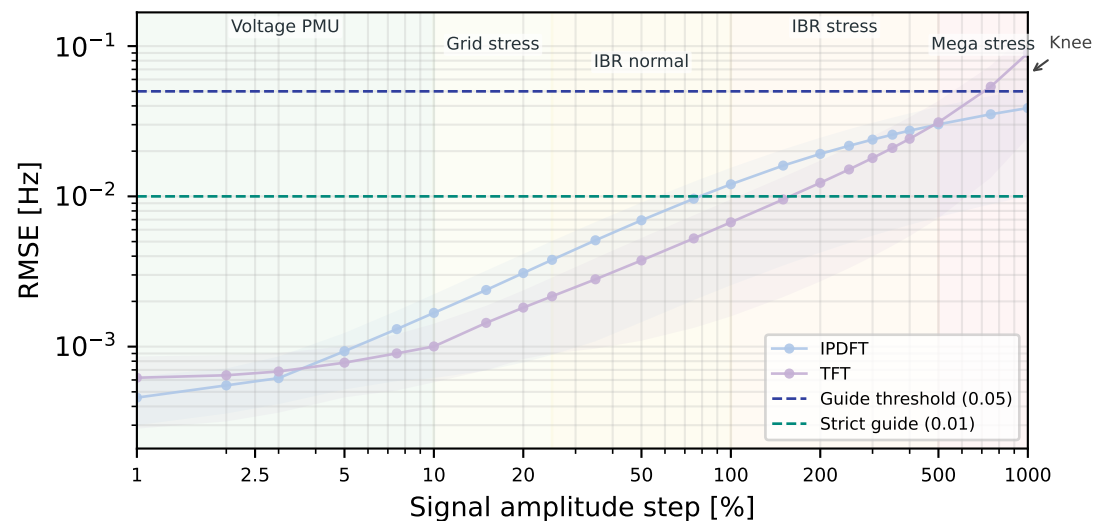

Adaptive

