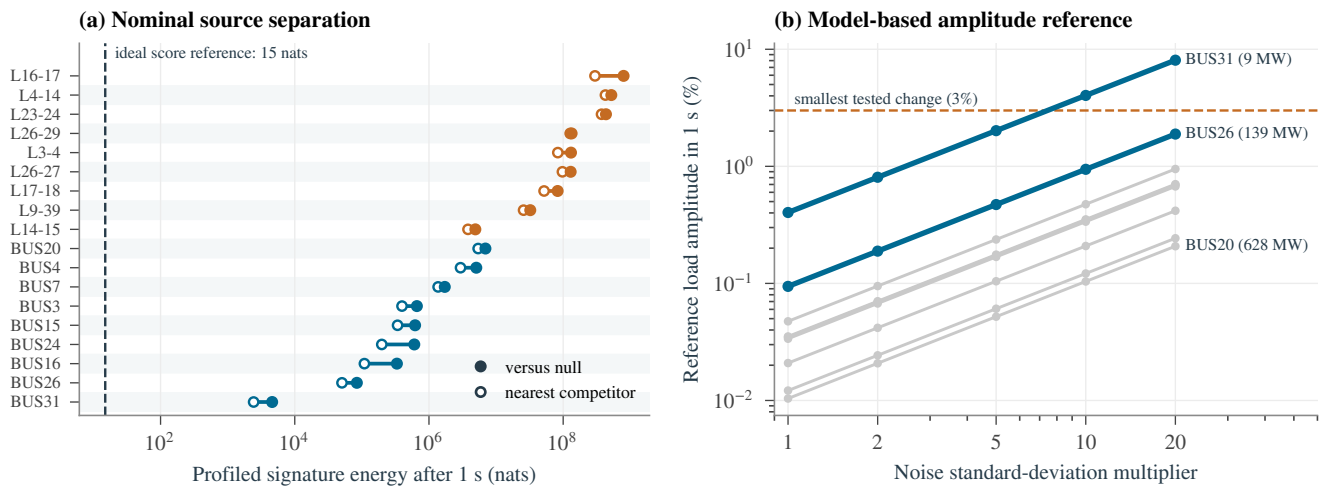
(a) Nominal source separation
ideal score reference: 15 nats
L16-17
L4-14
L23-24
L26-29
L3-4
L26-27
L17-18
L9-39
L14-15
BUS20
BUS4
BUS7
BUS3
BUS15
BUS24
BUS16
BUS26
BUS31
versus null
nearest competitor
10^2
10^4
10^6
10^8
Profiled signature energy after 1 s (nats)
(b) Model-based amplitude reference
smallest tested change (3%)
BUS31 (9 MW)
BUS26 (139 MW)
BUS20 (628 MW)
10^1
10^0
10^{-1}
10^{-2}
Reference load amplitude in 1 s (%)
1
2
5
10
20
Noise standard-deviation multiplier