

# GPS, Ligado, the FCC and all that

John Manferdelli  
johnmanferdelli@hotmail.com

# Agenda

- The FCC rule that motivated the study
- The Mobile Satellite and GNSS band
- How GPS works
  - Satellites
  - Coarse acquisition and navigation
  - Noise
  - Signal structure and “coding gain”
- Noise and interference metrics
- Study outcome and recommendations

# The FCC order

On April 20, 2020, the FCC licensed Ligado to operate ATC downlinks in the 1526-1536 MHz frequency band under certain conditions.

1. Ligado's ATC base stations operating at 1526-1536 MHz band shall not exceed an equivalent isotopically radiated power (EIRP) of 9.8 dBW (10 W) with a +/- 45 degree cross-polarized base station antenna
2. Ligado ATC base station antenna in the 1526-1536 MHz band may not be located less than 250 feet laterally or less than 30 feet below an obstacle clearance surface established by the FAA; and
3. Ligado is required to comply with specific reporting, notification, and monitoring obligations.


The emissions are further limited as follows by the order:

- *ATC Mobile Terminal Emissions.*
  - -67 dBW/4kHz at 1627.5 MHz
  - a level determined by linear interpolation from -67 dBW/4kHz at 1627.5 MHz to -100 dBW/MHz at 1610 MHz in the 1627.5-1610 MHz frequency range
    - a level determined by linear interpolation from -100 dBW/MHz at 1610 MHz to -105 dBW/MHz at 1608 MHz in the 1610-1608 MHz frequency range
    - -105 dBW/MHz in the 1541-1608 MHz frequency range
    - -58 dBW/4 kHz at a 1 megahertz offset beyond the edges of the authorized and internationally coordinated MSS frequency assignment at 1646.5-1656.5 MHz

# The FCC order

- *ATC Mobile Terminal Discrete Emissions.*
  - a level determined by linear interpolation from -44 dBW/700 Hz at 1625 MHz to -110 dBW/700 Hz at 1610 MHz in the 1625-1610 MHz frequency range
  - a level determined by linear interpolation from -110 dBW/700 Hz at 1610 MHz to -115 dBW/700 Hz at 1608 MHz in the 1610-1608 MHz frequency range
  - -115 dBW/700 Hz in the 1608-1559 MHz frequency range
  - -132 dBW/2 kHz in the 1559-1541 MHz frequency range
- *ATC Base Station Emissions.*
  - -85 dBW/MHz in the 1541-1559 MHz and 1610-1650 MHz frequency ranges
  - -100 dBW/MHz in the 1559-1610 MHz frequency range
- *ATC Base Station Discrete Emissions.*
  - -112 dBW/2 kHz in the 1541-1559 MHz frequency range
  - -110 dBW/700 Hz in the 1559-1610 MHz frequency range
  - -95 dBW/700 Hz in the 1610-1650 MHz frequency range

# GNSS/MSS Spectrum

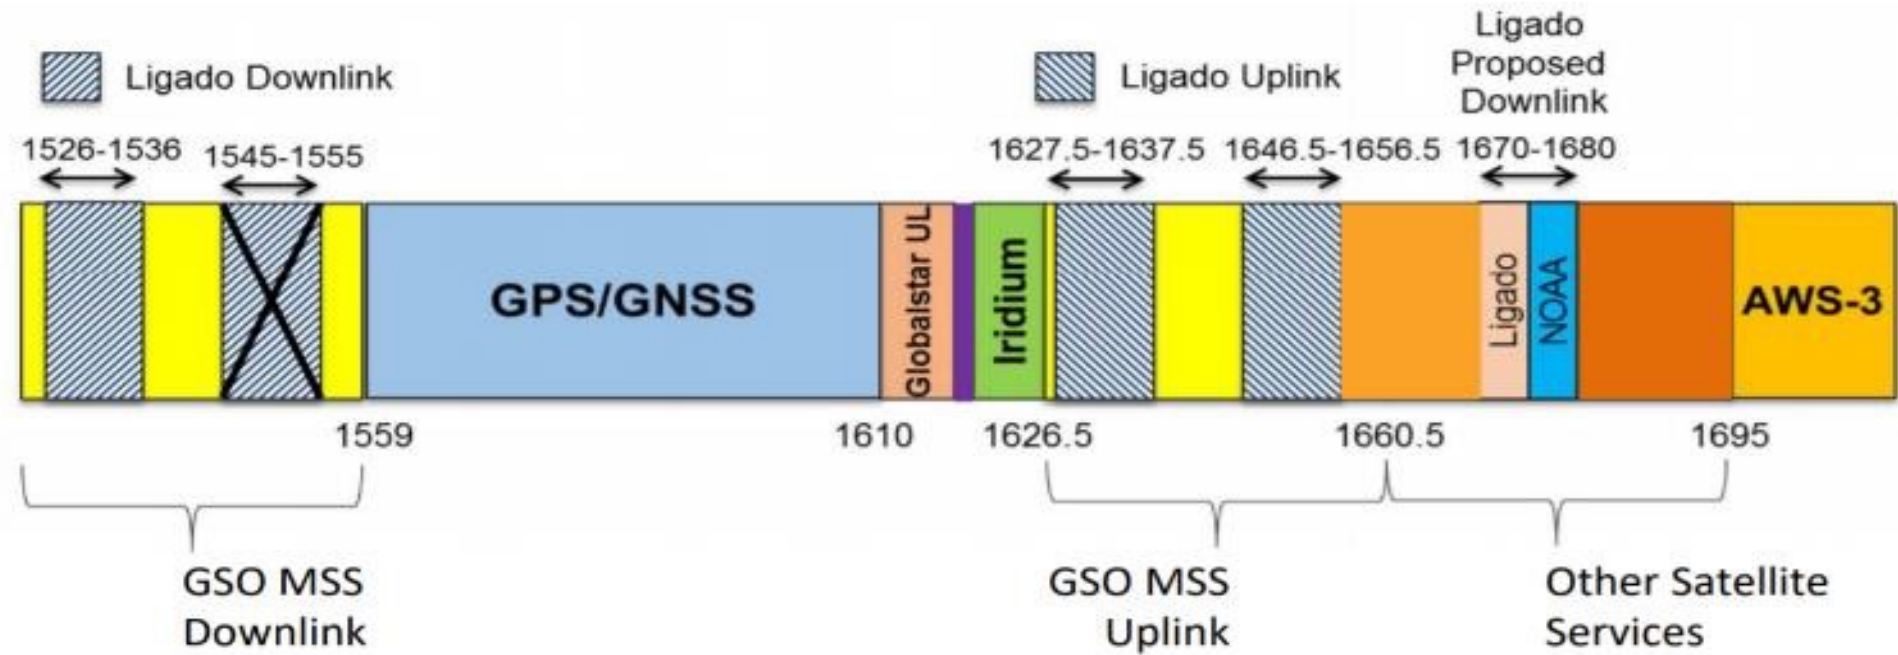

# Study Focus

- What methods should be used to assess possible interference
  - SNR
  - Study of individual receivers
- Will there be “harmful interference” to GNSS and MSS services
  - Anyone
  - DoD missions
- How practical and effective are the mitigation techniques being proposed

# GPS

- Space Segment
  - 32 operating satellites (Current generation: block IIIA – 2018)
    - Satellite identified by PRN (1-32).
  - Medium Earth Orbit (MEO): 12 hour orbits at 20000km, 8-12 satellites in view
    - MEO signal covers nearly half the earth
    - LEO covers a few percent
  - Transmitter power: 44.8 W,  $G_t = 12\text{dBi}$ .
  - Clocks accurate to better than 10ns (no leap seconds).
- Control segment master at Schriever AFB (plus alternative master, 4 ground antennas and 6 ground stations). Ephemeris updates daily.
- User segment
  - Two bands: L1 (1575.42 MHz [2.046MHz BW]) civilian and military, L2 (1227.6MHz)], military only
  - Two signals: C/A (civilian) and P(Y) (military).
  - C/A signal uses Direct Sequence Spread Spectrum to overcome noise limitations and separate satellite signals. Chipping code is PRN dependant.



# Some data and rough calculations

- GPS transmitter power: 44.8 W,  $G_t = 12\text{dB}$ . Free space loss at  $r = 20000\text{km}$ :  $P_r = \frac{P_t G A}{4\pi r^2}$ .
- Final power at receiver is about  $-170\text{dB}$  (Well below ambient noise power of about  $-140\text{dB}$ )
- With “coding gain” of  $43\text{dB}$  final effective signal strength at receiver is  $-170 + 43 = -127\text{dB}$ .
- So, SNR is about :  $-127 + 144 = 17\text{dB}$ 
  - Lower in practice since satellite not directly overhead, and there are shadowing and multipath losses.

$$\text{First aid: } P(\text{dB}) = 10 \log\left(\frac{P}{P_{ref}}\right)$$



# Signal Structure

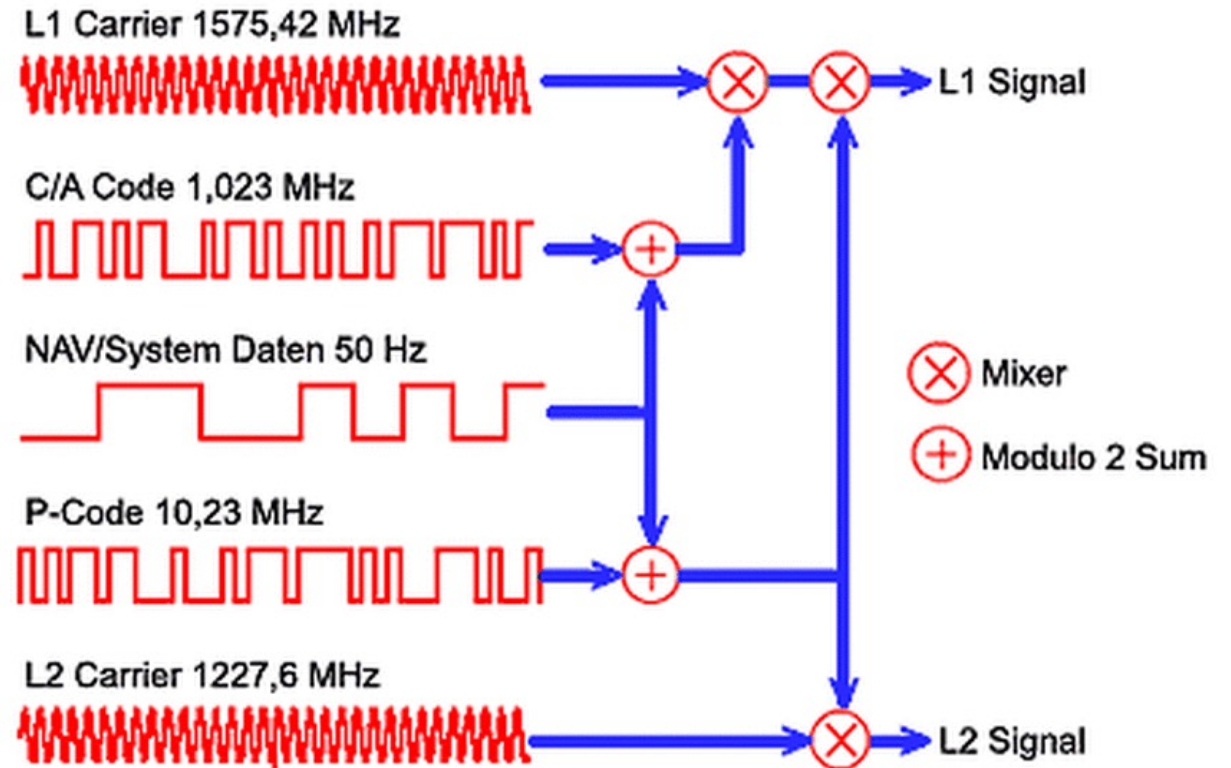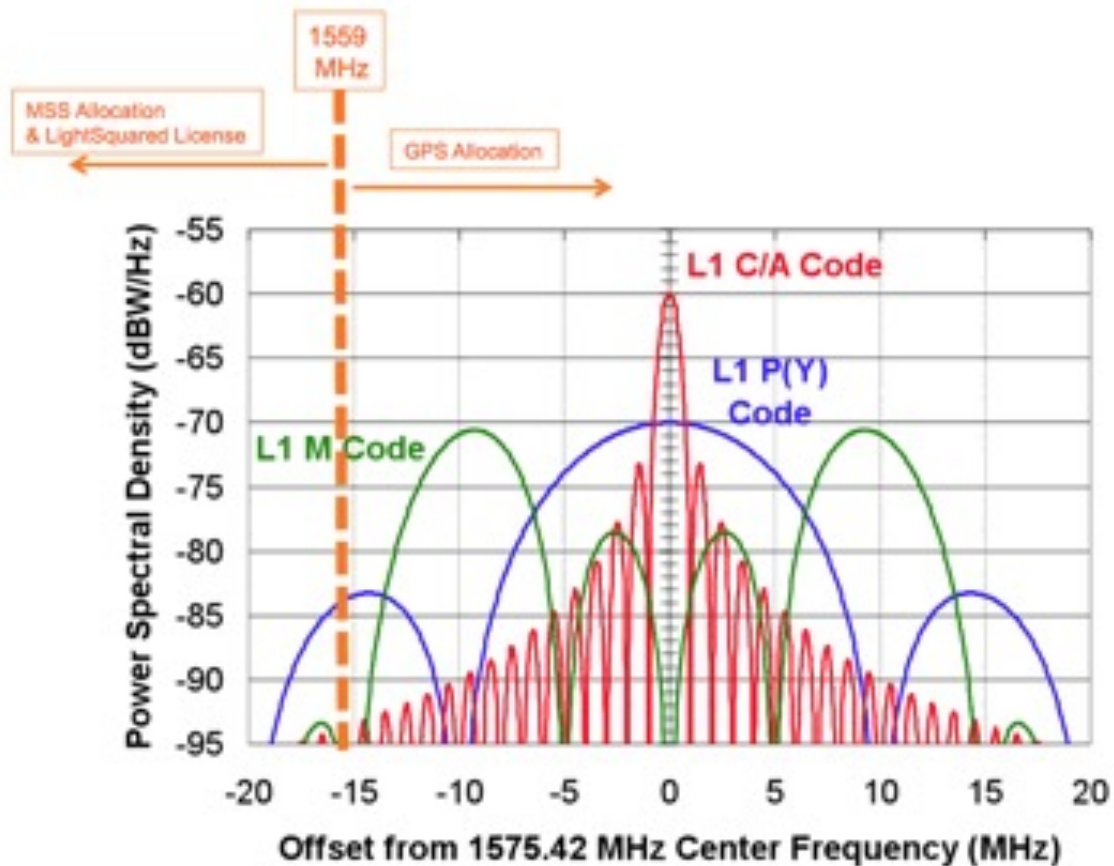

# L1 Signal Structure

- L1 signal:  $s(t) = A_c C(t) D(t) \cos(\omega_c t + \theta_1) + A_p P(t) D(t) \sin(\omega_c t + \theta_2)$ 
  - $C(t)$  - coarse ranging code
  - $D(t)$  - navigation signal consists of (clock, ephemeris, almanac corrections) 37,500 bits. 50 bps transmission.
  - $P(t)$  - precision ranging (Y is encrypted)
- $s_m(t) = C(t) \oplus D(t)$ .  $s(t) = A_c s_m(t) \cos(\omega_c t + \theta_1)$  [bpsk]
  - $D(t)$  is the navigation data at 50 bps transmission
  - $C(t)$  uses 1 Mbps chipping rate. 300 meters,  $1\mu s/chip$
  - This accounts for the  $\frac{10^6}{50} = 20000$  or  $43dB$  “coding gain”
- C/A code is different for each satellite
  - So many satellites can transmit on the same frequency
  - Receiver has to “try” each satellite’s C/A code until it “acquires”

# Acquisition, tracking and navigation

- Acquisition
  - Receiver generates known C/A code and attempts to correlate with signal.
  - To generate C/A code, receiver needs to know which satellite it's attempting to acquire to determine code
- Tracking via delay loop to maintain C/A code alignment
- The Navigation Message includes the Ephemeris parameters, the Time parameters and Clock Corrections, the Service Parameters with satellite health information, Ionospheric parameters model, and the Almanacs, allowing the computation of the position of "all satellites in the constellation". The ephemeris and clocks parameters are usually updated every two hours, while the almanac is updated at least every six days.

# Navigation Message

- The navigation message contains 25 pages ('frames') of 30 seconds each. Entire message takes 12.5 minutes to be transmitted. Every frame is subdivided into 5 sub-frames of 6 seconds each; every sub-frame consists of 10 words, with 30 bits per word.
- Every sub-frame starts with the telemetry word (TLM), needed for synchronism. Next, the transference word (HOW) which provides time information (seconds of the GPS week), allowing the receiver to acquire the week-long P(Y)-code segment.
  - Sub-frame 1: contains information the satellite clock. It also has information about satellite health condition.
  - Sub-frames 2 and 3: contain satellite ephemeris.
  - Sub-frame 4: provides ionospheric model parameters, UTC information (Universal Coordinate Time), part of the almanac, and indications whether the Anti-Spoofing, A/S, is activated.
  - Sub-frame 5: contains data from the almanac and the constellation status. It allows to quickly identify the satellite from which the signal comes. A total of 25 frames are needed to complete the almanac.
  - **Sub-frames 1, 2 and 3 are transmitted with each frame.** The content of sub-frames 4 and 5 is common for all satellites. So, the almanac data for all in orbit satellites can be obtained from a single tracked satellite.


# Processing and Accuracy

- For satellite k:  $\rho^k = \sqrt{(x^{(k)} - x)^2 + (y^{(k)} - y)^2 + (z^{(k)} - z)^2} - bc$ 
  - Need to account for skew between satellite clocks and receiver clock. b is receiver's clock bias
  - Four satellites required. More satellites increase precision with least squares.
- Doppler correction improves accuracy
- *Carrier-Phase Enhancement* corrects timing errors caused by non-zero PRN pulse transition.
  - It uses the L1 carrier wave, which has a period about one-thousandth of the C/A Gold code bit providing an additional clock.
  - The phase difference error in the normal GPS amounts to 2–3 m error. *Carrier-Phase Enhancement* reduces this to 3 cm (1.2 in).
    - Averaging can get this down to millimeters!

# Carrier phase measurements

- Carrier phase is number of carrier cycles since some starting point. Receiver must track phase to accurately track integer cycles
  - Receiver acquires lock and measures fractional phase difference between received and receiver generated carrier
- $\phi(t) = \phi_u(t) - \phi^s(t - \tau) + N$ , where  $t$  is “perfect” GPST time
- $\tau$  is sat transit time,  $t^s(t - \tau)$  is corresponding emitter time,  $t_u(t)$  is arrival time measured by receiver clock.  $70ms \leq \tau \leq 90ms$ .
  - $\delta t^s(t)$  is satellite clock bias and  $\delta t_u(t)$  is the receiver clock bias
  - $t_u(t) = t + \delta t_u(t)$ ,  $t^s(t) = (t - \tau) + \delta t^s(t - \tau)$
- Apparent range:  $\rho(t) = c[t_u(t) - t^s(t - \tau)]$ .  $t$  and  $\tau$  are unknown at outset.
- Bottom line
  - Much more accurate than code aligned times.
  - Final accuracy for carrier phase fix is a few centimeters. Millimeters with averaging!
- High precision receivers use carrier phase measurements. Very important not to lose lock otherwise “integer variability” ruins carrier phase estimate

# GPS receiver

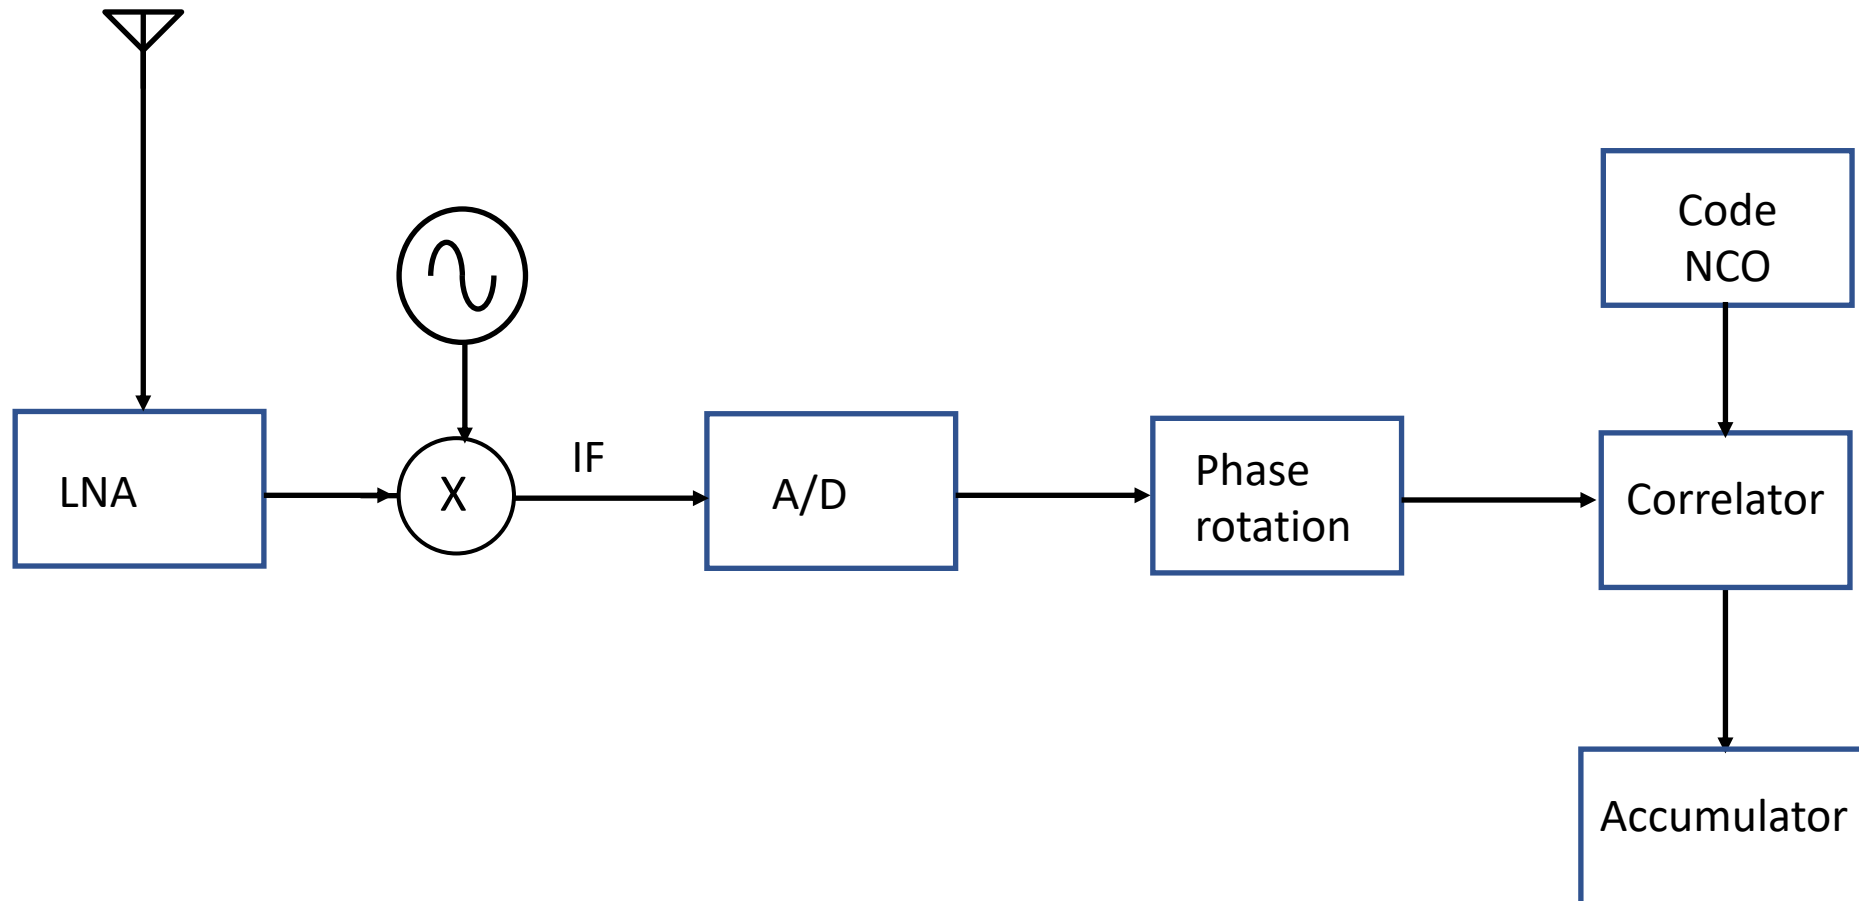

# Interference and Harmful Interference

The ITU's definition of "interference" is:

- The effect of unwanted energy due to one or a combination of *emissions, radiations*, or inductions upon reception in a *radio communication* system, manifested by any performance degradation, misinterpretation, or loss of information which could be extracted in the absence of such unwanted energy.

ITU definition of "harmful interference" (ITU) :

- *Interference* which endangers the functioning of a *radio navigation service* or of other *safety services* or seriously degrades, obstructs, or repeatedly interrupts a *radio communication service* operating in accordance with [the] Radio Regulations

These international regulations also include two related terms:

- *permissible interference*
- *accepted interference*
- Harmful Interference
  - Roughly "harmful interference" to a service operating in accordance with FCC regulations



# Noise Power and Interference Power

- $\frac{I+N}{N}$ , I is power of “interfering signal”, N is “noise power”
- Often expressed in dB:  $10\log_{10}(\frac{I+N}{N})$ .
- In general ,  $P_n = NB$ , where N is the noise power per Hz and B is the bandwidth
- Thermal noise is  $N = kT$ .  $k = 1.38 \times 10^{-23} \frac{m^2 \cdot kg}{s^2 \cdot K}$
- $4 \times 10^{-21} \frac{Watts}{Hz}$  at 300 K or about  $8 \times 10^{-15} W$  (or -141dB) over 2 MHz GPS BW
- Free space loss: for  $d_1 < d_2$ ,  $\frac{P(d_2)}{P(d_1)} \approx (\frac{d_1}{d_2})^2$
- $SNR = \frac{P}{P_n}$  also often expressed in dB

(I+N)/N (dB)	(I+N)/N
1	1.26
2	1.58
3	2
4	2.51
5	3.16

(I+N)/N (dB)	(I+N)/N
6	4
7	5
8	6.3
9	7.0
10	10

# Evidence presented to committee

- Receiver classes: General Navigation (GLN), Timing (TIM), Cellular (CEL), High Precision (HP)
- Presentations
  - DoT report (ABC) report
  - Roberson report
  - Ligado presentation
  - FCC
- Many experimental studies had fundamental problems
  - “Harmful Interference” characterized at imputed  $(I+N)/N$  of 1dB under worst conditions
    - Almost no receiver started losing function until 4dB (6 times the power of 1dB metric)
    - Many did not to degrade until 8dB (21 times power of 1dB)
  - Imputed because it was receiver reported (so bad filters and receiver design influenced metric)
  - Receivers were not identified and old. (Newer receivers are much better)
  - High precision were designed to receive outside GPS including: one that received directly in Ligado’s band
- Except for HP receivers, almost no receiver experienced “harmful interference” from Ligado
- About half of the HP receivers experienced harmful interference at the closest allowed distance from emitter
- Biggest problem: Real Time Kinematics (RTK)
- Substantially no evidence of interference with HP receivers sold after around 2012

# Study Committee

Michael McQuade

Jennifer Alvarez

Kristine Larson, NAS

John Manferdelli

Preston Marshall

Mark Psiaki

Richard Reaser, Jr.

Jeffrey Reed

Nambi Seshadri, NAE

Scott Stadler

Stephen Stafford

Carnegie Mellon University (Chair)

Aurora Insight Inc.

University of Colorado Boulder

VMware

Google

Virginia Tech

Independent Consultant

Virginia Tech

University of California San Diego

MIT Lincoln Laboratory

Johns Hopkins University Applied Physics Laboratory

# Presentations to the Committee

DOD CIO

Ligado Networks

National Telecommunications and  
Information Administration, Dept. of  
Commerce

Roberson and Associates

Volpe Center, Department of Transportation

National Advanced Spectrum and  
Communications Test Network

Brad Parkinson, Stanford University

Garmin International

Trimble, Inc.

Iridium

Resilient Navigation and Timing Foundation

AMS Committee on Radio Frequency  
Allocation

National Society of Professional Surveyors

Air Line Pilots Association

Aviation Spectrum Resources, Inc.

Collins Aerospace

Helicopter Association International

National Agricultural Aviation Association

Office of Engineering and Technology,  
Federal Communications Commission

# Reviewers

Alison K. Brown, NAE

Alden Fuchs

Christopher Hegarty

Todd Humphreys

Mark Lofquist

Douglas Loverro

Jon Peha

William Press, NAS

Dorothy Robyn

Douglas Sicker

NAVSYS Corporation

Fuchs Consulting

MITRE Corporation

University of Texas at Austin

Aerospace Corporation/University of Colorado Boulder

Loverro Consulting

Carnegie Mellon University

University of Texas at Austin

Boston University

University of Colorado Denver

# Approaches to Predicting Interference

- Signal-to-Noise interference protection criterion

This approach tests GPS receivers at various interference levels that could be attributed to Ligado transmissions and measures the resulting degradation in reported  $C/N_0$ . Many key receiver functions can be mapped to  $C/N_0$  thresholds. This metric commonly proposes a 1 dB loss (or less) as precluding harm to any of these functions.


- Measurement of the GPS position error

This approach tests GPS receivers under two scenarios, the first without the Ligado signals present and the second with them. Truth surveyed position is known in both cases. Any increase in the average position error and related position error statistics for the second scenario relative to the first are deemed measures of interference by the Ligado signals.

# FCC Definition of Harmful Interference

- “[i]nterference which endangers the functioning of a radionavigation service or of other safety services or seriously degrades, obstructs, or repeatedly interrupts a radiocommunication service operating in accordance with [the ITU] Radio Regulations.”
- This implies two conditions:
  - The emission, radiation or induction must (a) endanger the functioning of the radio navigation or safety service or (b) seriously degrade, obstruct or repeatedly interrupt any other radiocommunication service and
  - The service claiming Harmful Interference must be operating in accordance with regulations (as in United States Code (USC), Title 47 Telecommunications, Chapter 1, Subchapter A, Part 15, Section 15.3)).
- Report uses the uncapitalized term ‘harmful interference’ meaning degraded receiver operations without assessing whether such degradation is actually causing a degradation of function or whether the receiver is operating in accordance with FCC rules.

# The Frequency Bands of Interest

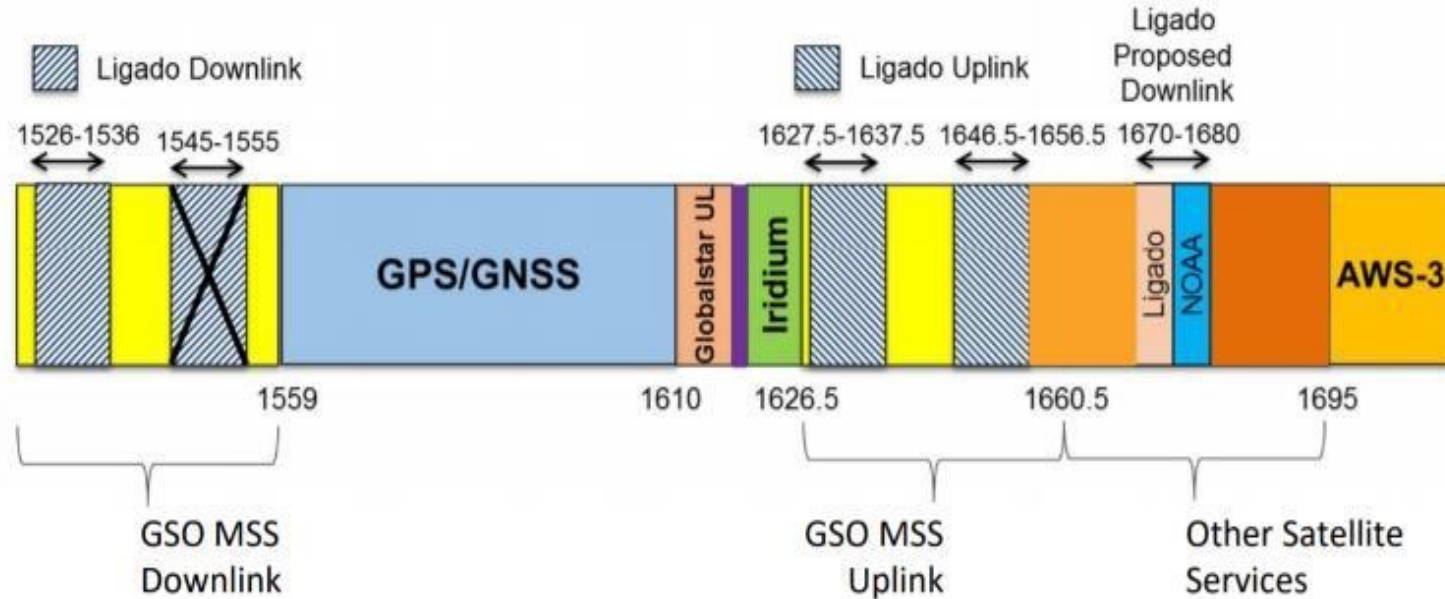

- RF transmitters do not operate with arbitrarily sharp cutoff frequencies and thus, depending on how rapidly (as a function of frequency) their emitted power spectrum falls off, may emit power beyond their authorized spectral bands.
- RF receivers do not 'listen' only within a band defined with arbitrarily sharp boundaries and thus may receive power from frequencies outside their designed band.



# Approaches to Evaluating Harmful Interference Concerns

**Conclusion: Neither of the prevailing approaches to evaluating harmful interference concerns effectively **effectively characterizes** the risk of harmful interference.**

- Neither approach provides analytical, repeatable, or straightforward criteria to evaluate new entrants. Both approaches depend on sampling a subset of the many and varied GPS receivers in the marketplace. Both approaches have a role to play in evaluating harmful interference to existing receivers.
- The signal-to-noise approach is inflexible as a determinant or threshold, providing what in some circumstances may be an overly conservative emission limit because no single value for signal-to-noise degradation determines when the various types of possible harm to receiver performance will become significant.
- The position measurement approach is too narrow in its applicability to the many and varied uses of the GPS system.


# Further Comments

- While commonly argued in the FCC proceedings and in input to the committee *the committee does not believe that a 1 dB Interference Protection Criteria is appropriate as a general standard. Often receivers can tolerate 6-15 times this level of interfering power before the objective performance of a receiver is degraded.* The 1 dB criterion is prophylactic, but conservative.
- With more well-defined receiver standards, and frequency masks for potentially interfering signals, a straightforward SNR standard could be highly predictive of harmful interference and hence inform emitter characteristics that are calculated to prevent such interference.
- This SNR standard will likely be higher than 1dB signal degradation and the standard may change over time as technology improves.

# Harmful Interference to GPS and Mobile Satellite Services

## GPS Receiver Sensitivity to Interference

- Susceptibility spans up to 60 dB.
- GPS receivers encountering a different environment from when they were designed.

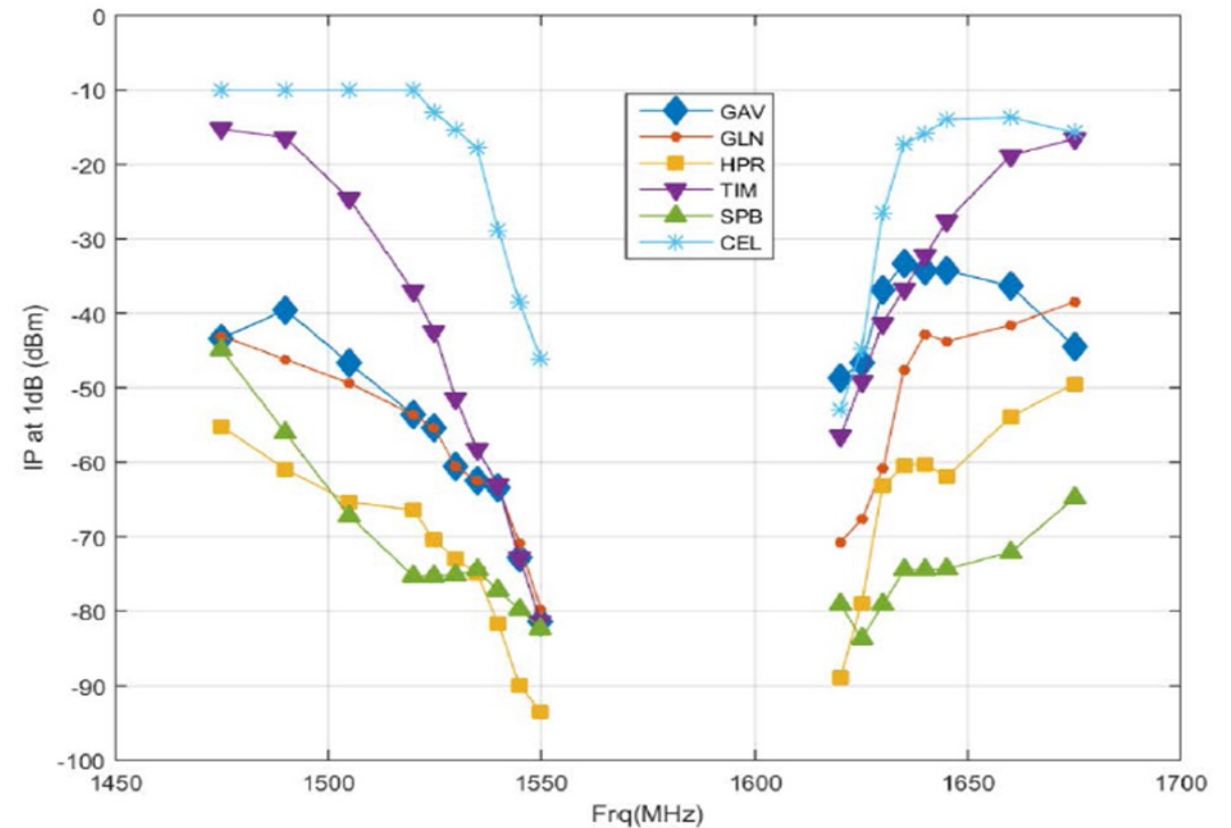

# Harmful Interference to GPS and Mobile Satellite Services

Conclusion for GPS interference caused by Ligado emissions in 1526-1536MHz:


- Most commercially produced general navigation, timing, cellular or certified aviation GPS receivers will not experience significant harmful interference from Ligado emissions as authorized by the FCC.
- High precision receivers are the most vulnerable receiver class, with the largest proportion of units tested that will experience significant harmful interference from Ligado operations as authorized by the FCC.

Conclusion: It is within the state-of-the-practice of current technology to build a receiver that is robust to Ligado signals for any GPS application, and all GPS receiver manufacturers could field new designs that could coexist with the authorized Ligado signals and achieve good performance even if their existing designs cannot.

Conclusion: Iridium terminals will experience harmful interference on their downlink caused by Ligado user terminals operating in the UL1 band while those Iridium terminals are within a significant range of a Ligado emitter — up to 732 meters.

# Potential interference with Iridium Downlink

- Iridium says their noise floor is  $-170$  dBm/Hz, which is consistent with a noise-limited system.
- At the high side of the Iridium band, channels will see an interference level of  $-76$  dBm/Hz from a single user.
  - Requires 94 dB of attenuation to be reduced to the noise floor which occurs at a distance of 732 m (free space path loss)

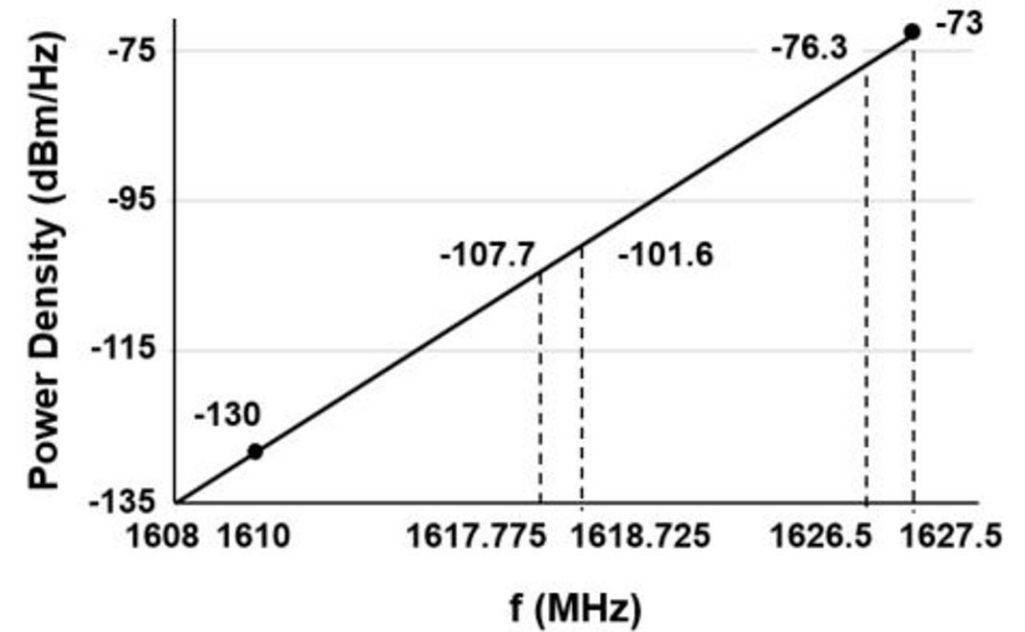

Out-of-band emissions spectral mask

# DoD statement on second study task

**‘DoD and interagency partners conducted testing to determine the impacts to GPS (captures FCC Order 20-48’s authorized deployment). The tests demonstrated that the proposed signal introduces harmful interference to critical national security mission capabilities.’**

**‘The terrestrial network authorized by FCC Order 20-48 will create unacceptable harmful interference for DoD missions. The mitigation techniques and other regulatory provisions in FCC Order 20-48 are insufficient to protect national security missions.’**

The committee discusses these issues in a classified annex to this report.

# Mitigations

- Although the mitigation procedures proposed in the order may be effective, in many cases such mitigation may be impractical without the extensive dialog among the affected parties presumed in the Order.
- In some cases, mitigation may not be practical at operationally relevant timescales or at reasonable cost.

# Better means of assessing harmful interference

- The committee believes that a sensible criterion for harmful interference could be developed that accounts for position error effects, acquisition and tracking challenges, and continuity of service.
- Such a criterion might be based on a maximum limit for degradation of  $C/N_0$  in the designated frequency range *for a reasonably well-designed receiver*.
- This analysis would then dictate an adjacent-band power mask that the FCC would guarantee going forward *for a given period of time*.



# Managing Future Controversies - Receiver standards

Many of the current spectrum controversies arise from receiver designs that were predicated on different environments than would emerge after FCC rulemakings. Assumptions about receiver performance would be highly beneficial in focusing the discussion, without impacting the marketplace or equipment cost and performance of future receiver designs.

# Managing future controversies

It is essential that spectrum decisions be flexible enough to be adjusted or changed completely.

A cohesive policy about rights of current users, the impact of equipment lifetime, business models, and all other considerations is essential, and should be established outside the pressures of any one spectrum decision.

# Administrative processes

FCC regulatory decisions have both a policy component, and a technical fact finding one.

- The process appeared to the committee to be resolving questions of fact, e.g., 'Will Ligado interfere with GPS,' through administrative and/or procedural processes rather than a technical one. While it is keenly aware of the constraints inherent in the Administrative Procedures Act, it is the committee's opinion that selecting from specific filings may not be an appropriate technique to answer questions of fact. This proceeding might have had a more accepted outcome if the FCC was in a position to provide its own positions on factual questions.
- A useful step to meeting the U.S. Government objectives (as compared to the individual objectives of the FCC and NTIA) would be to jointly study and test the impact of proposed regimes. Criteria would be agreed in advance, experiments agreed by all parties to be the relevant and inclusive cases.