






The main tool in our laboratory used for measuring superconducting material inside the helium can is a dipstick. It connects to a PC (the measurement card), voltage and current source from one side and to the superconducting material inside the helium can from another side.





1. I designed a DC dipstick using inventor software, but I have not electrically assembled it. All the previous dipsticks in our lab were designed to measure 6 Josephson junctions. I have been tasked with designing a new dipstick with the same dimensions that can accommodate 12 JJs with 48 filter lines. Additionally, I have also designed a compatible PCB for this dipstick.

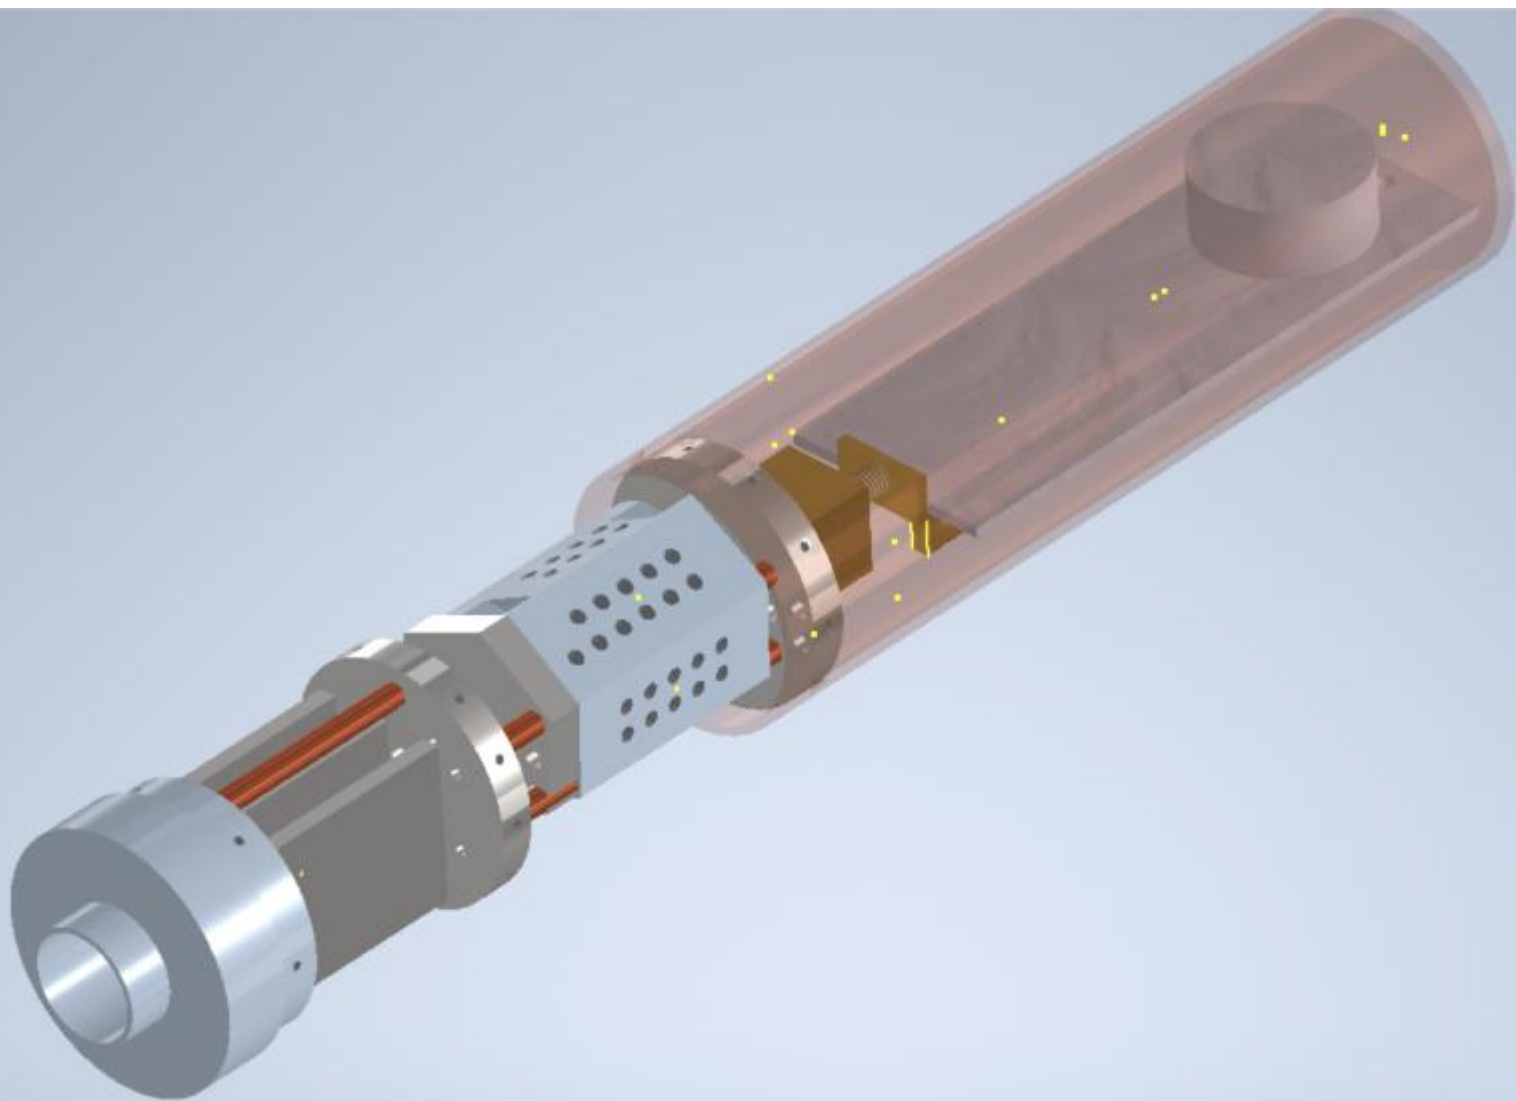

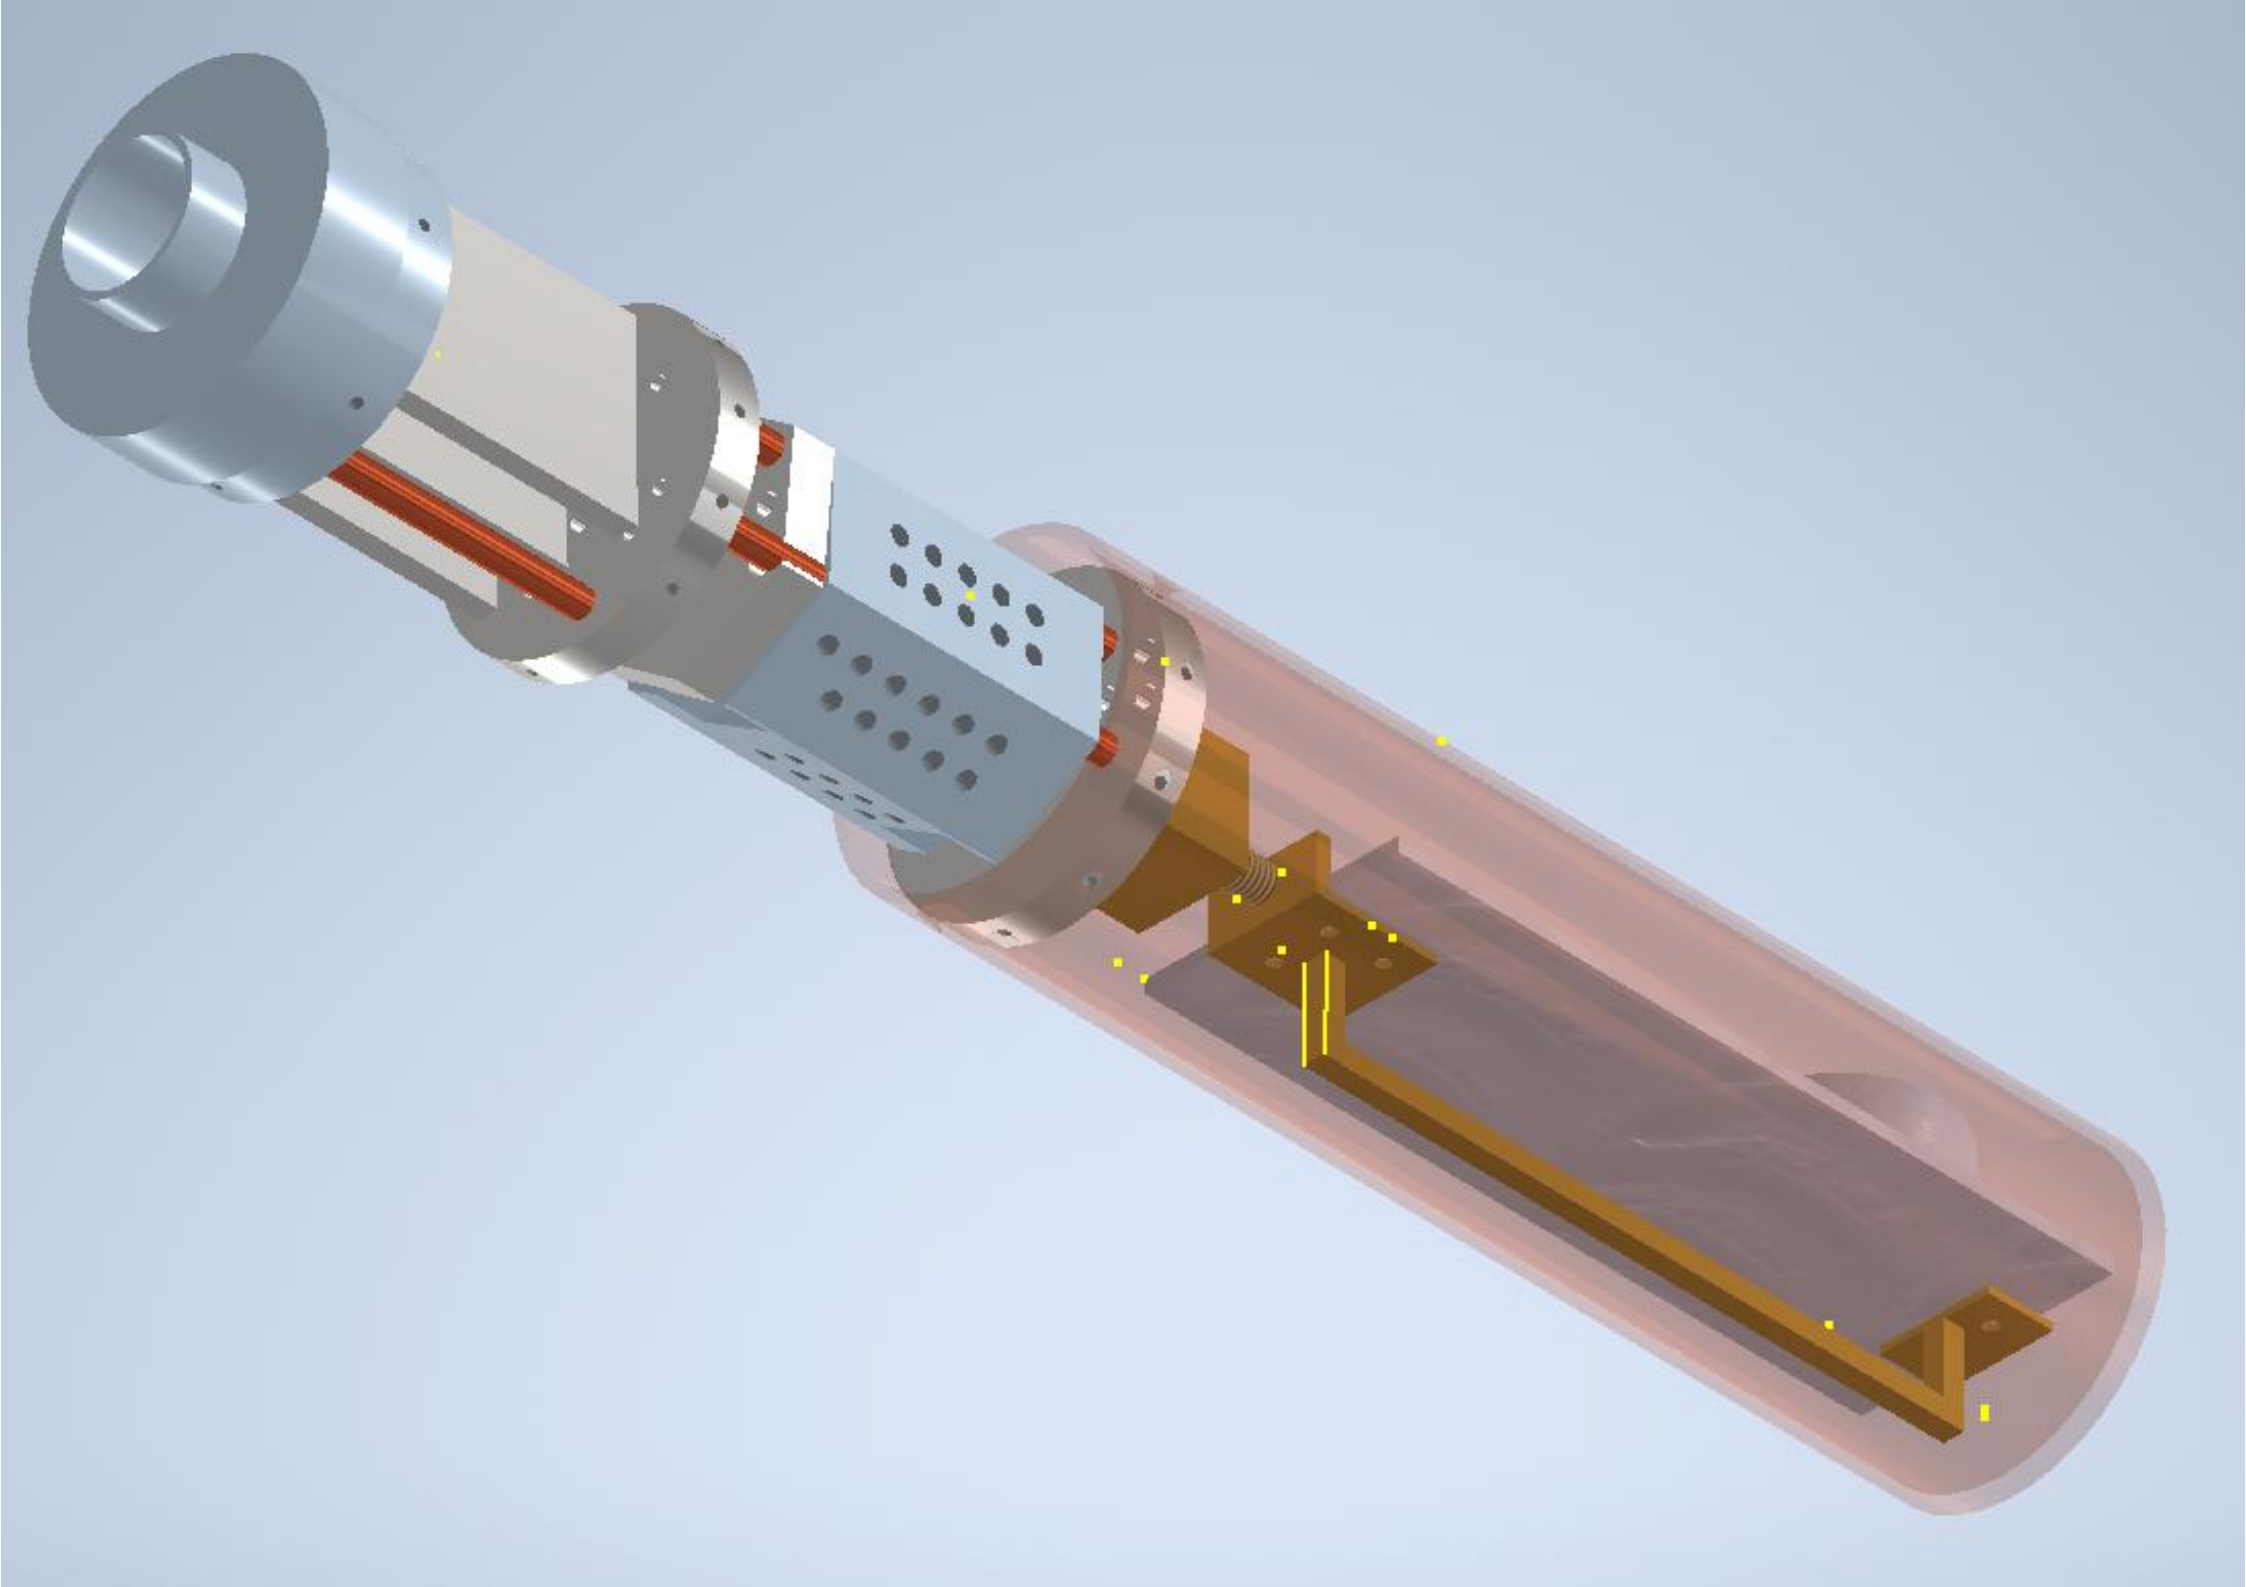

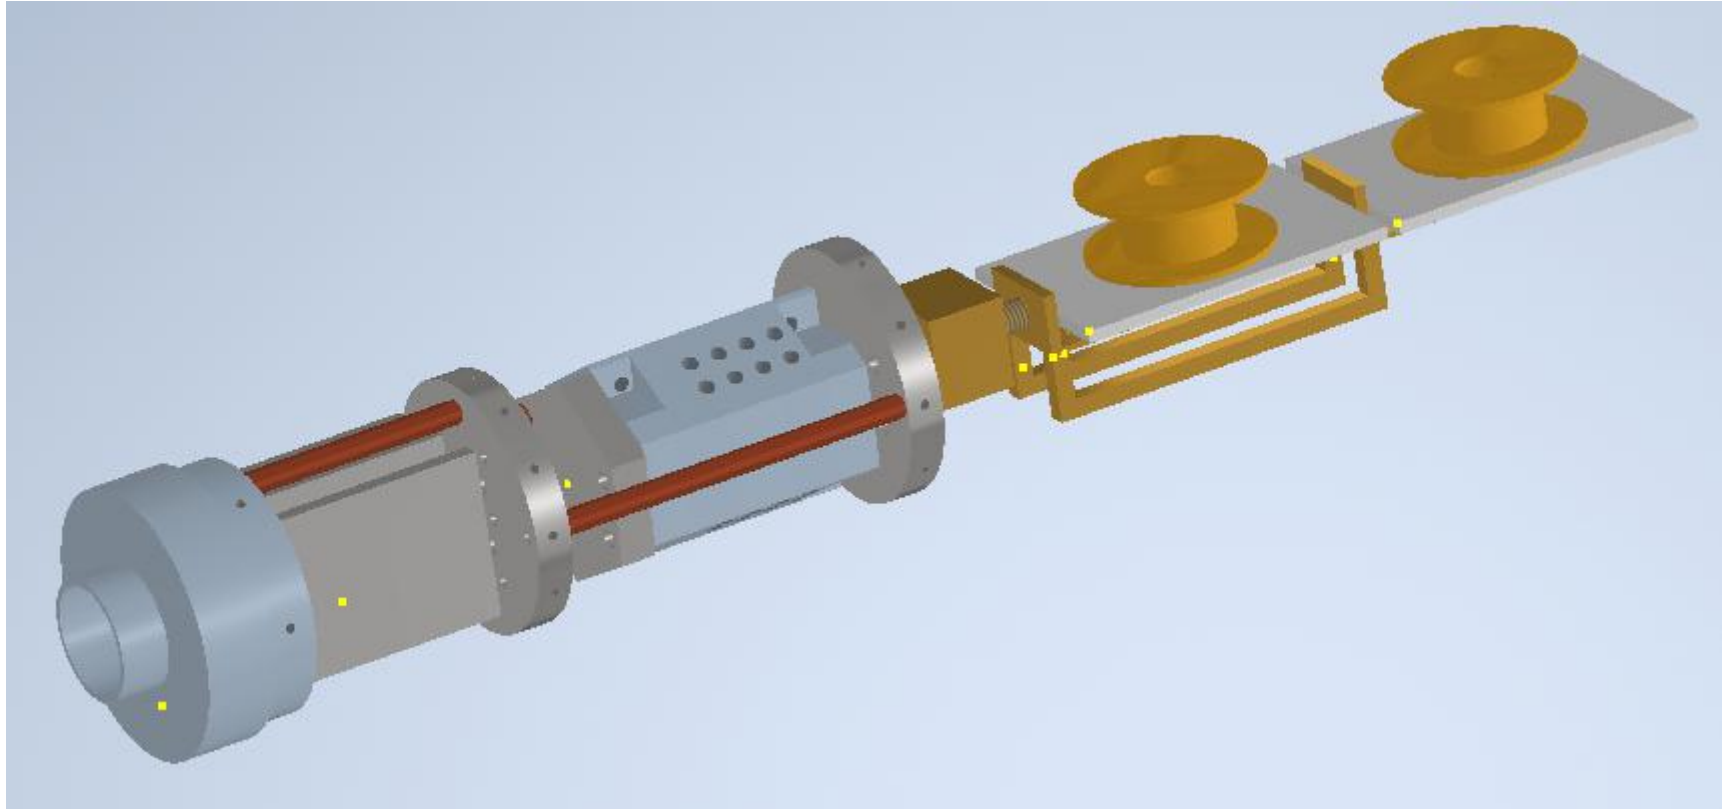

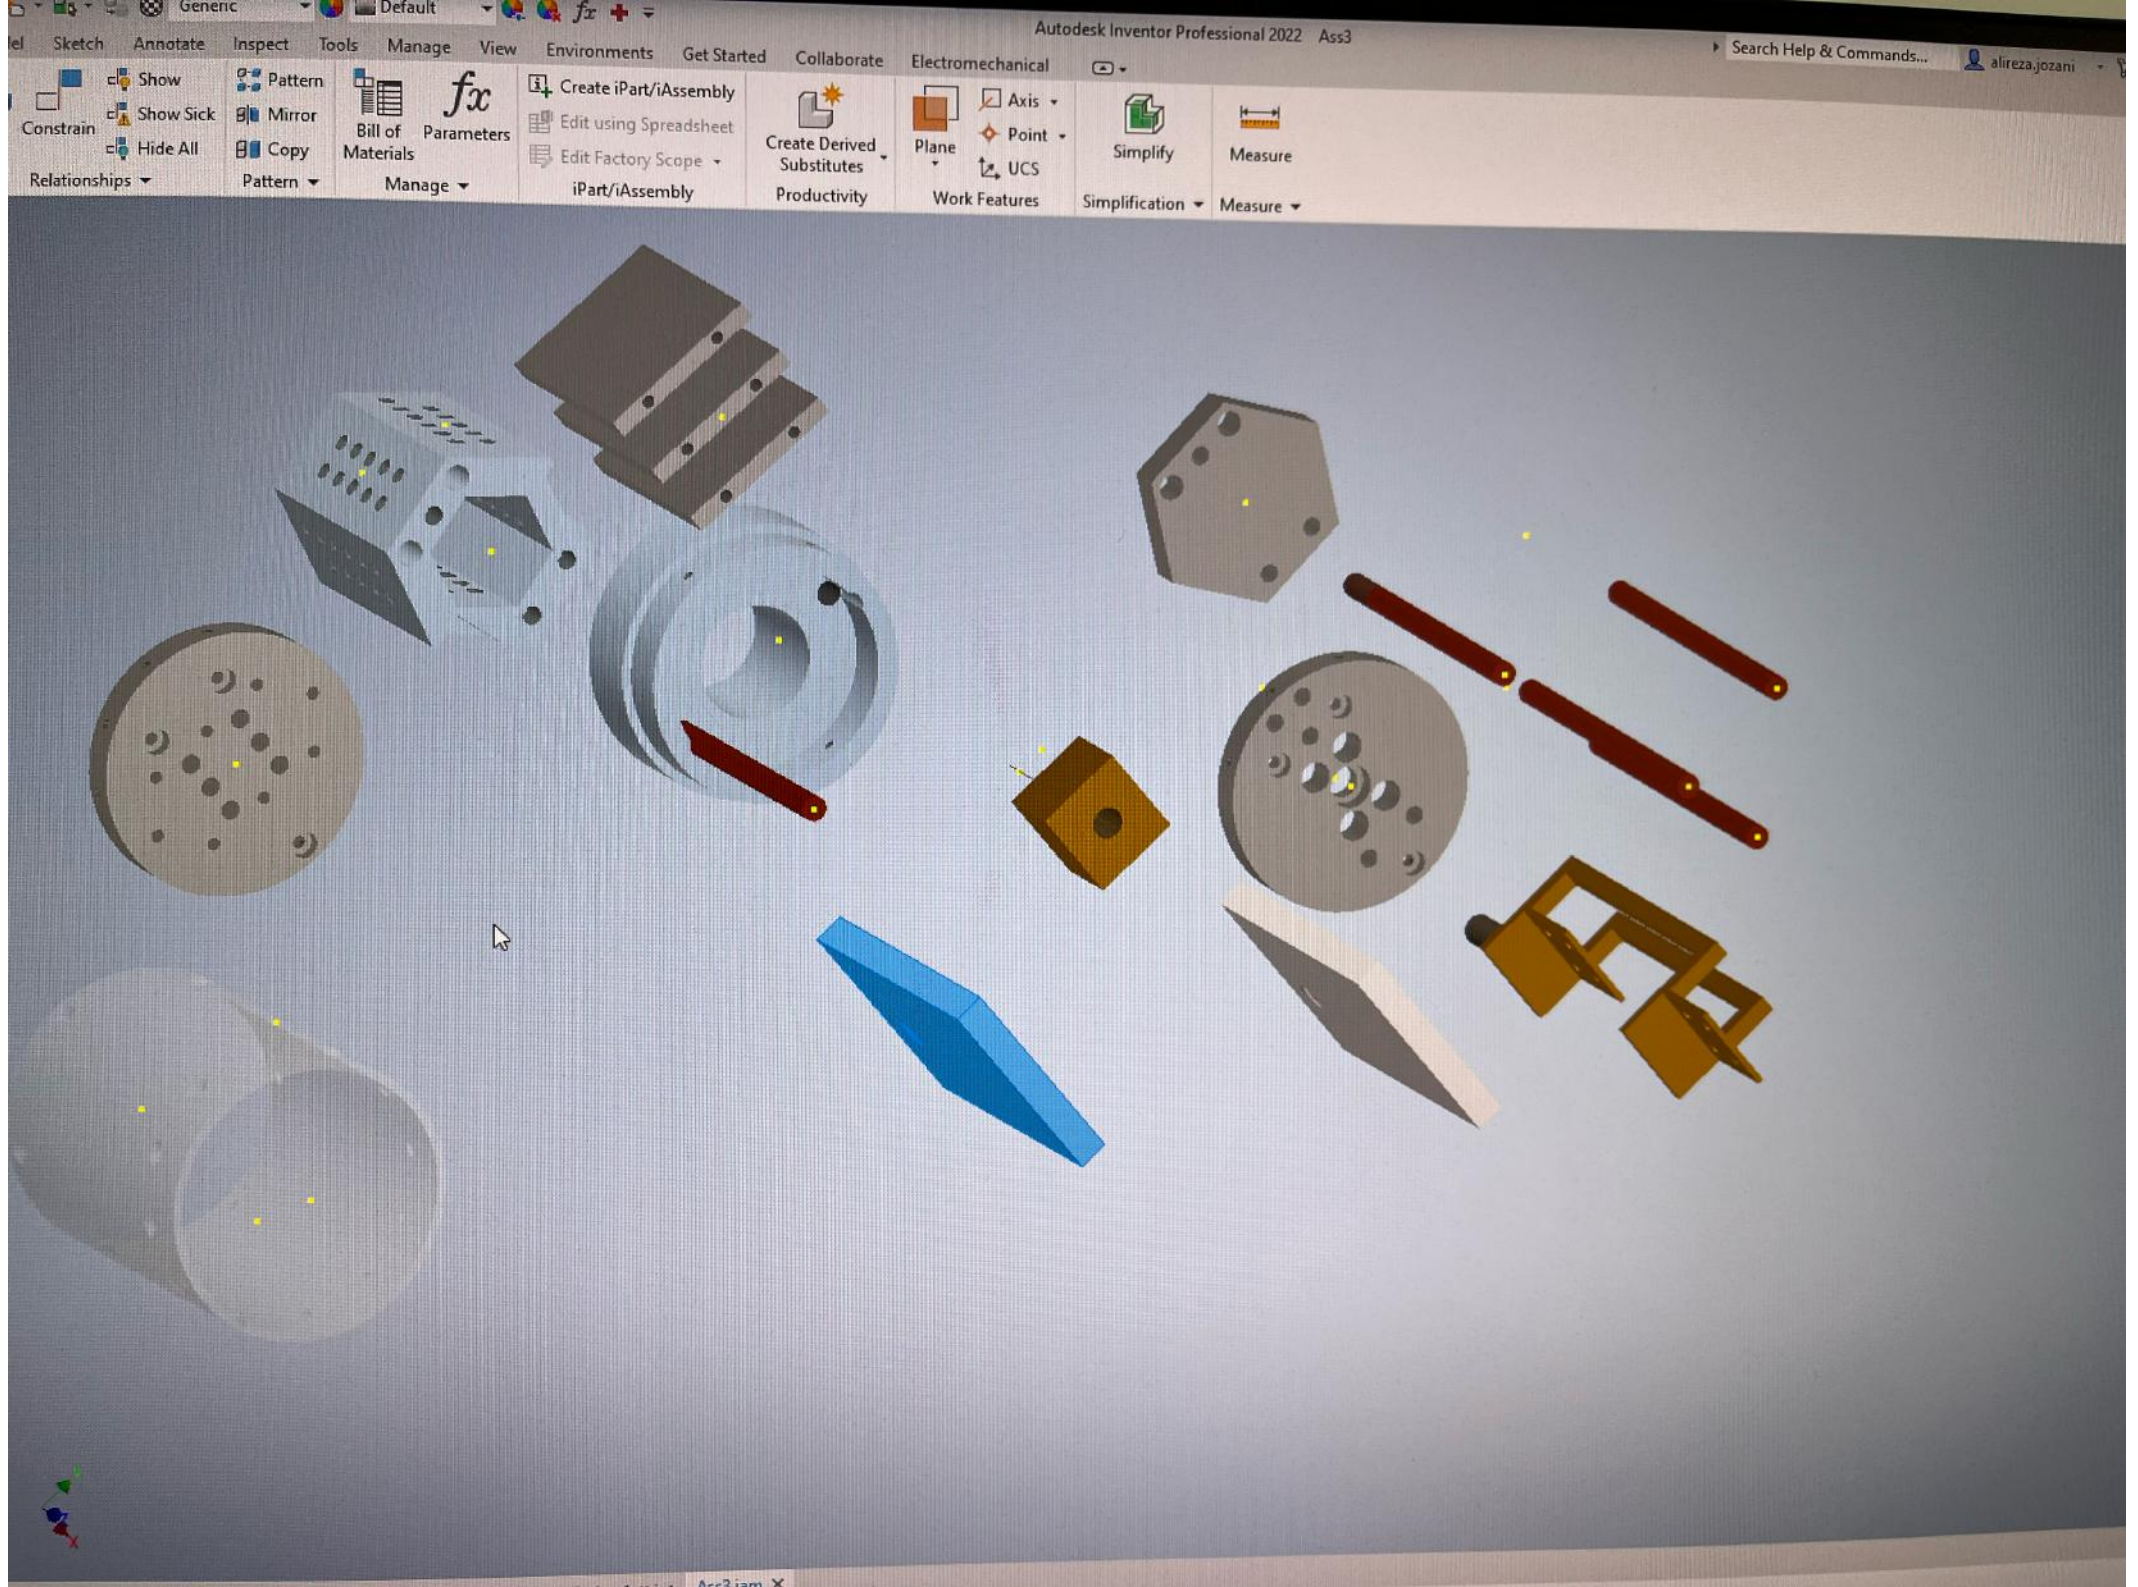

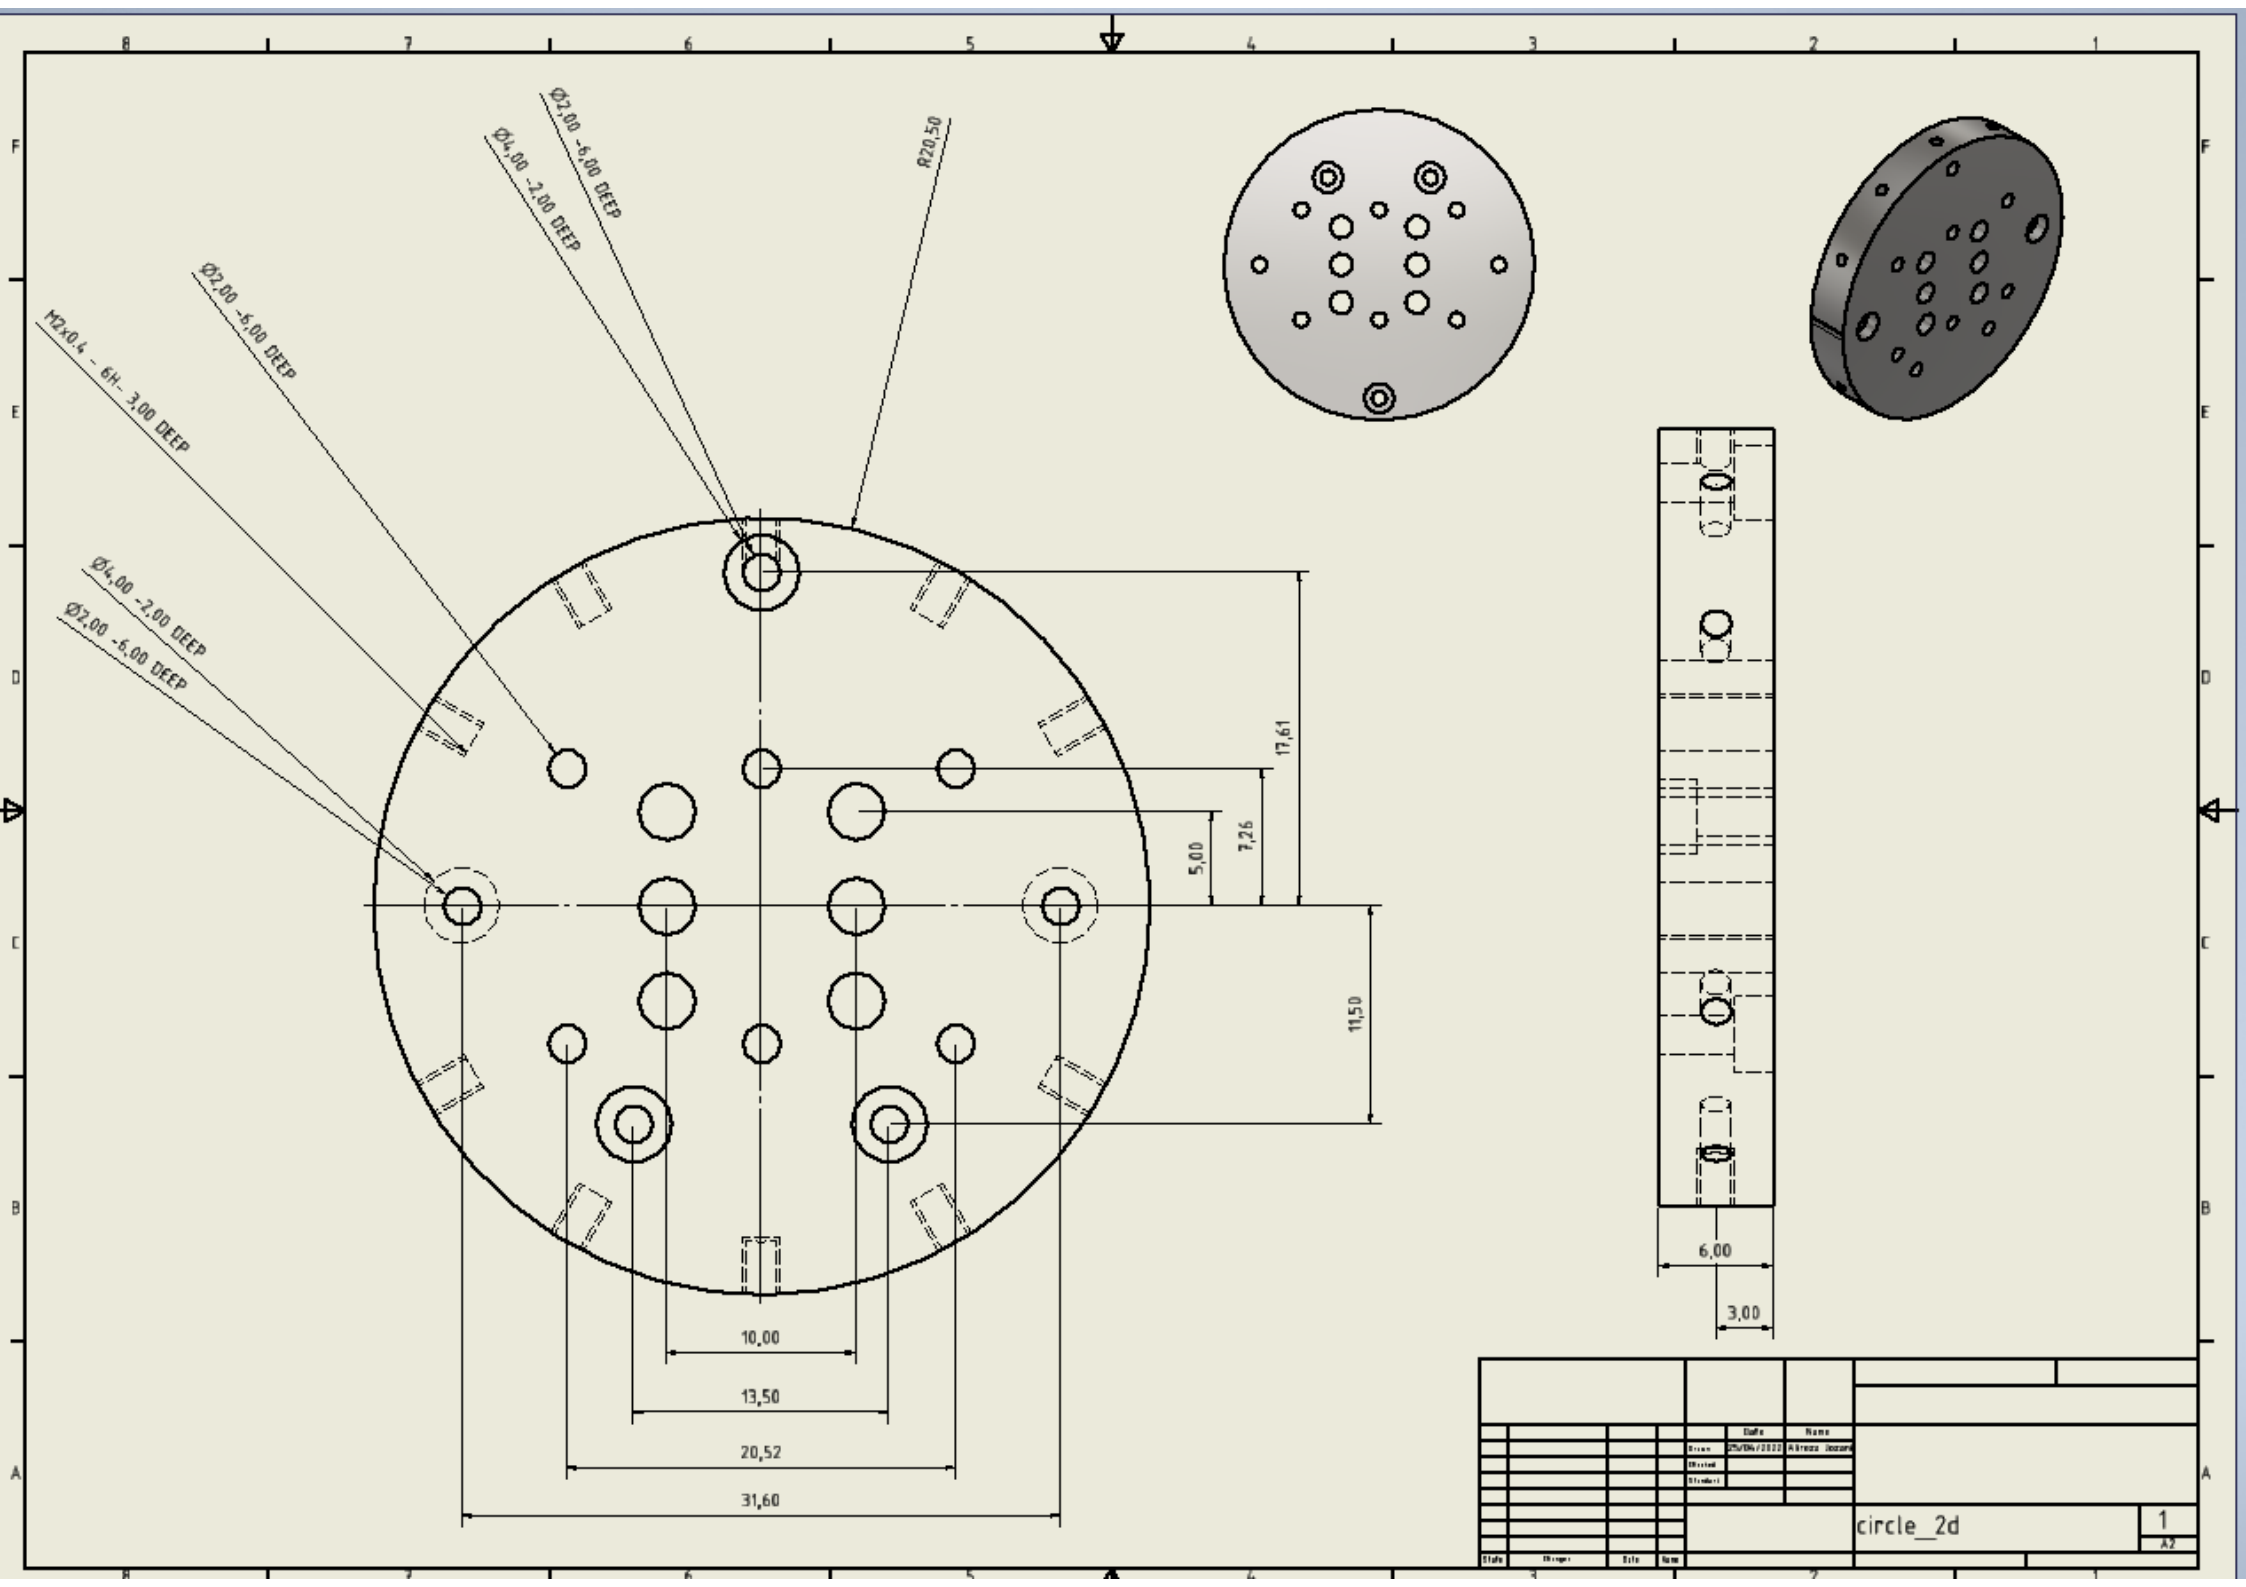

M2x0.4 - 6H - 3.00 DEEP

Ø2.00 - 5.00 DEEP

Ø4.00 - 2.00 DEEP

Ø2.00 - 6.00 DEEP

R20.50

Ø4.00 - 2.00 DEEP

Ø2.00 - 6.00 DEEP

5.00

7.26

17.61

11.50

10.00

13.50


20.52







31.60



6.00






3.00


				Date	Name				
				Drawn	25/06/2022	Checked			
				Drawn		Checked			
				Drawn		Checked			

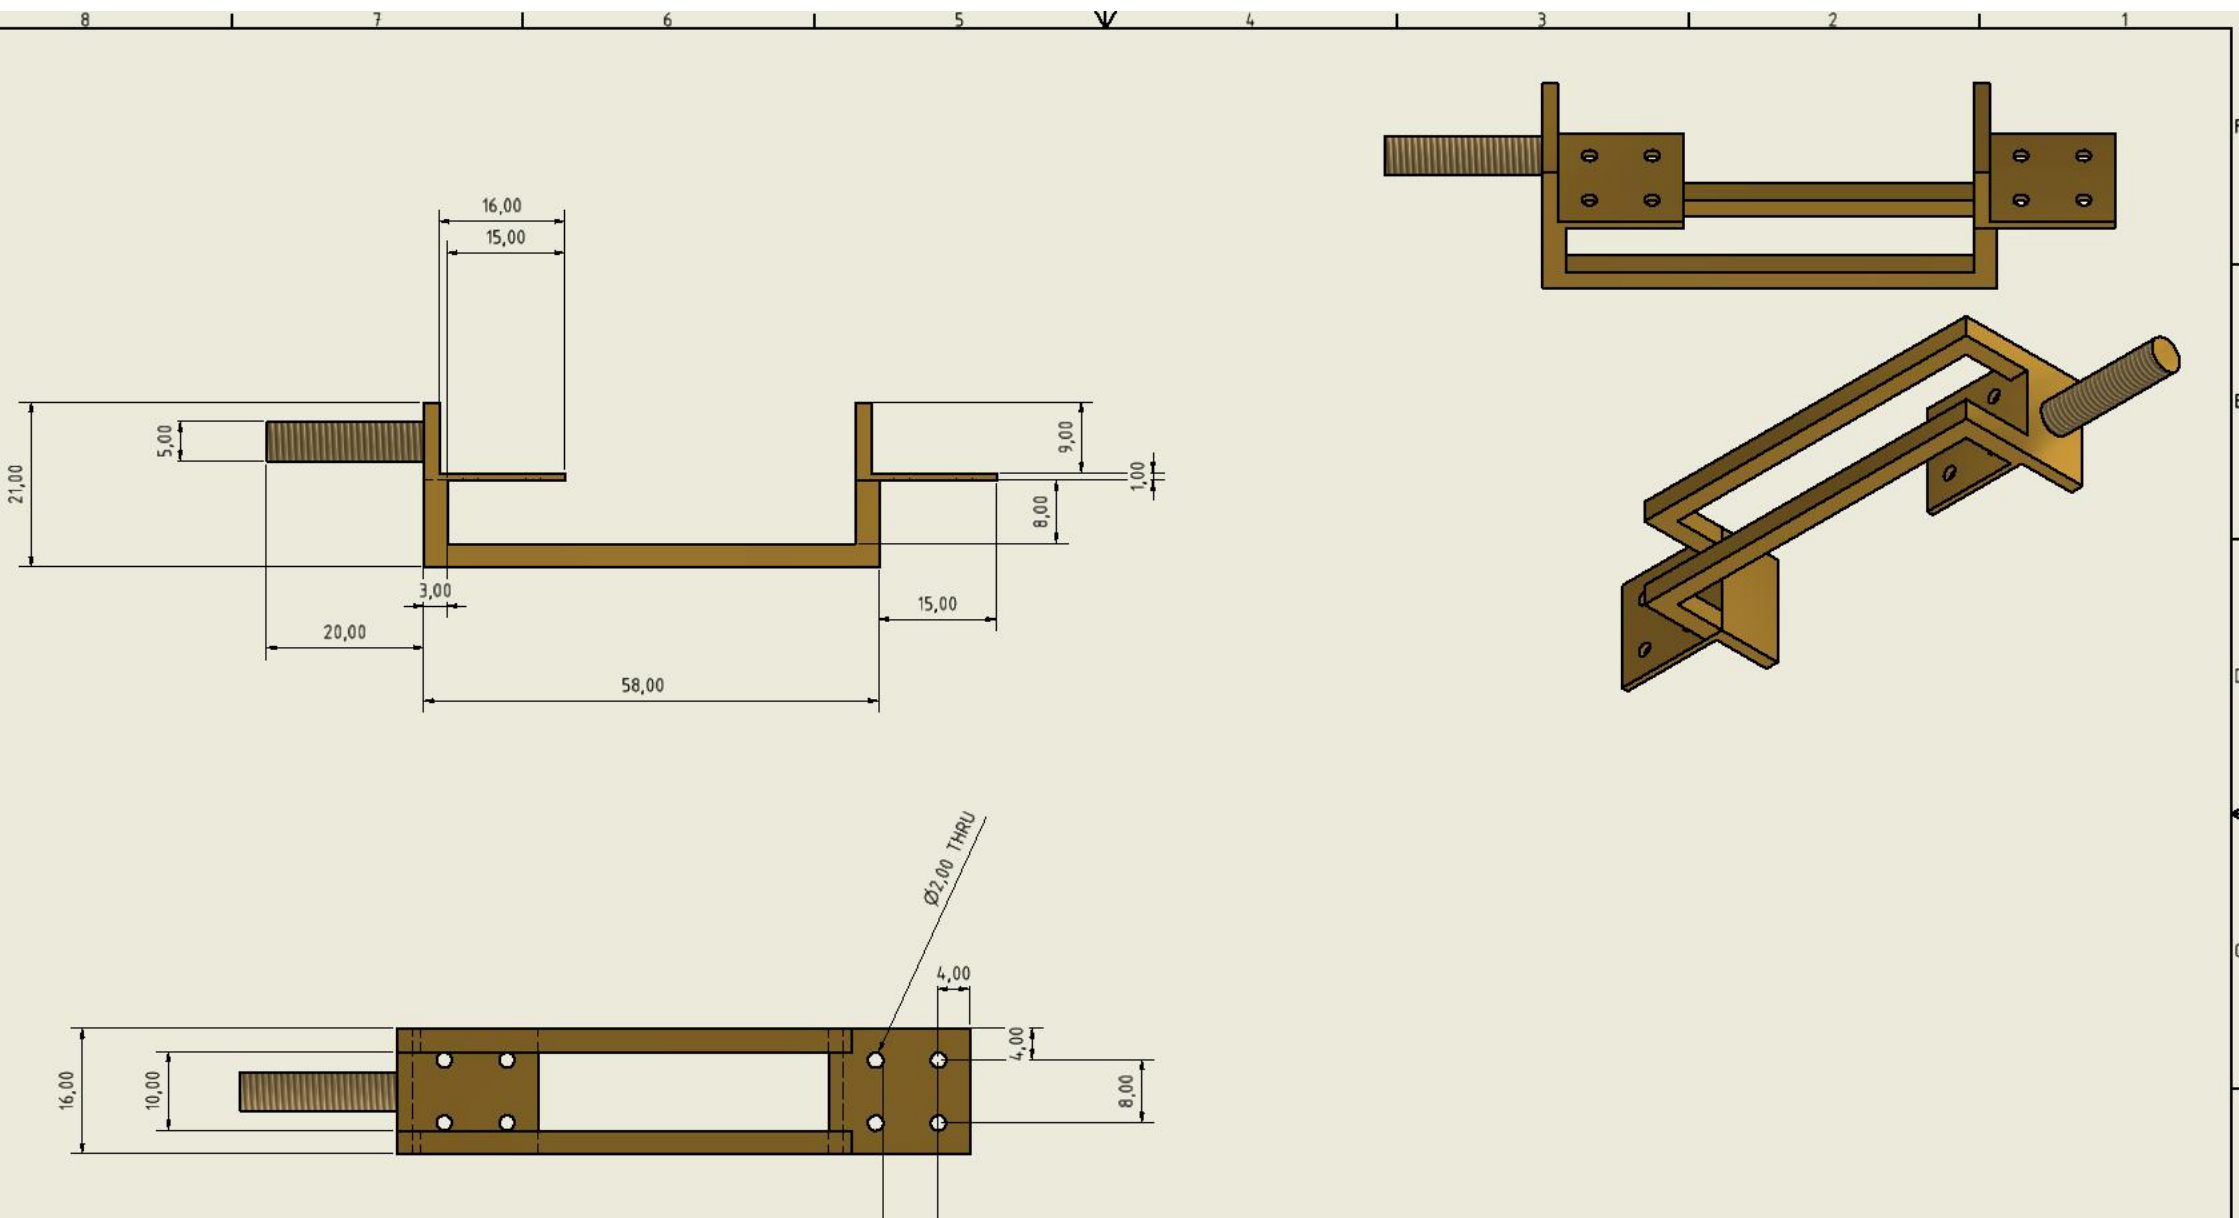


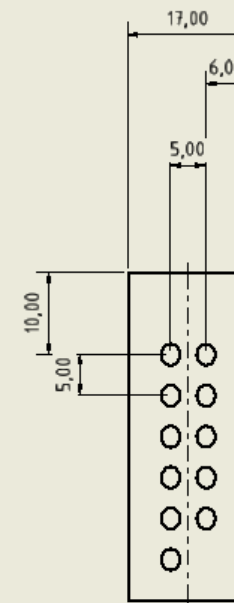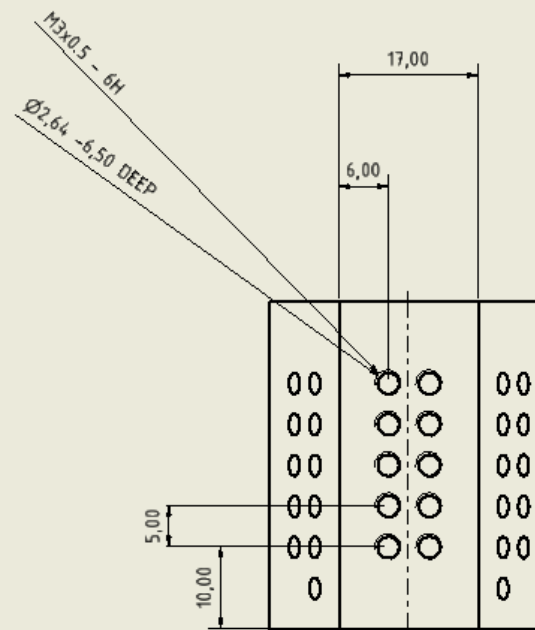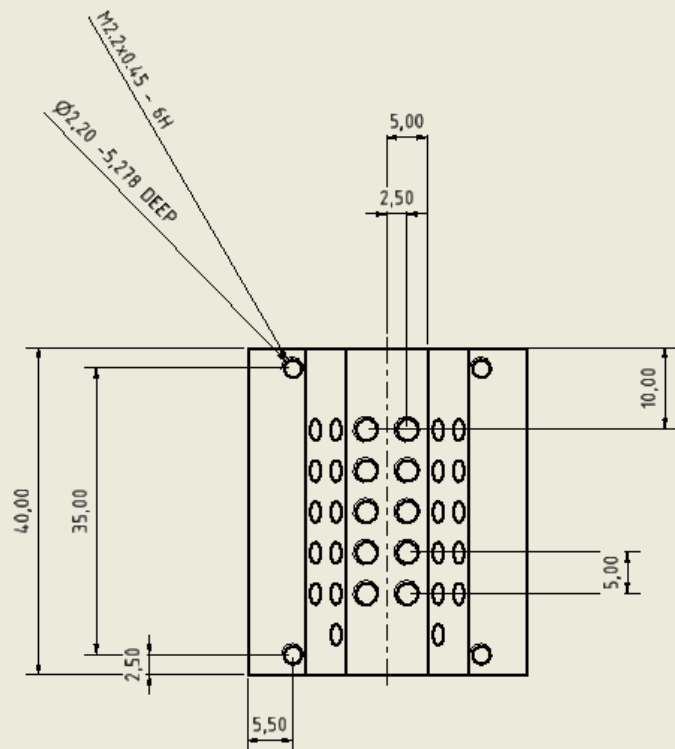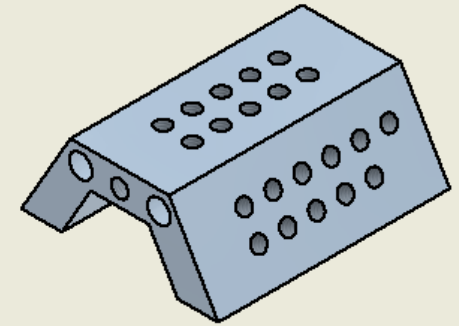
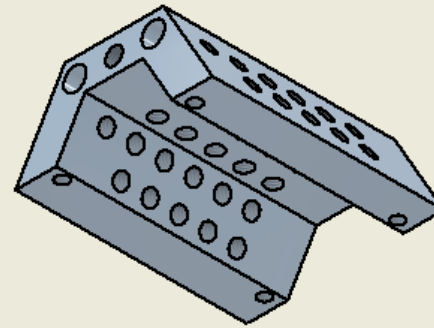
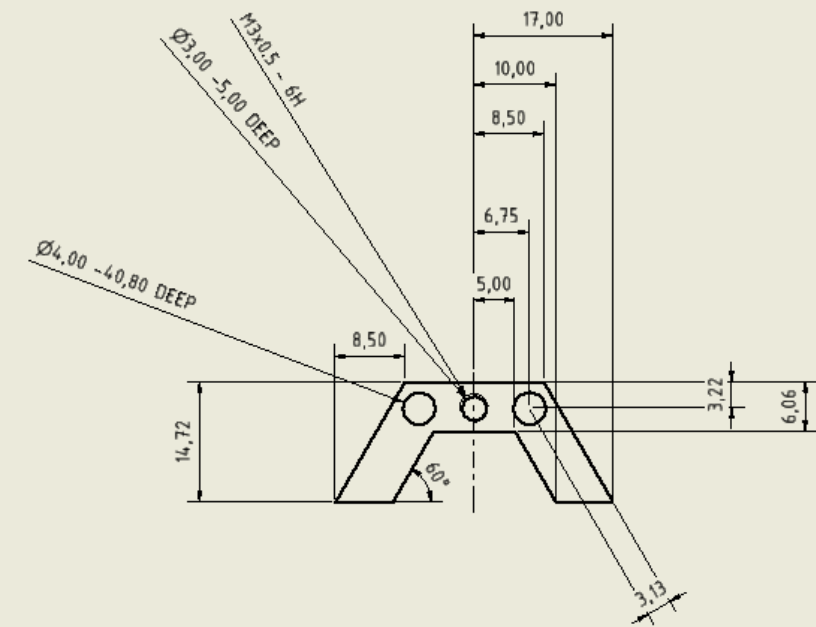


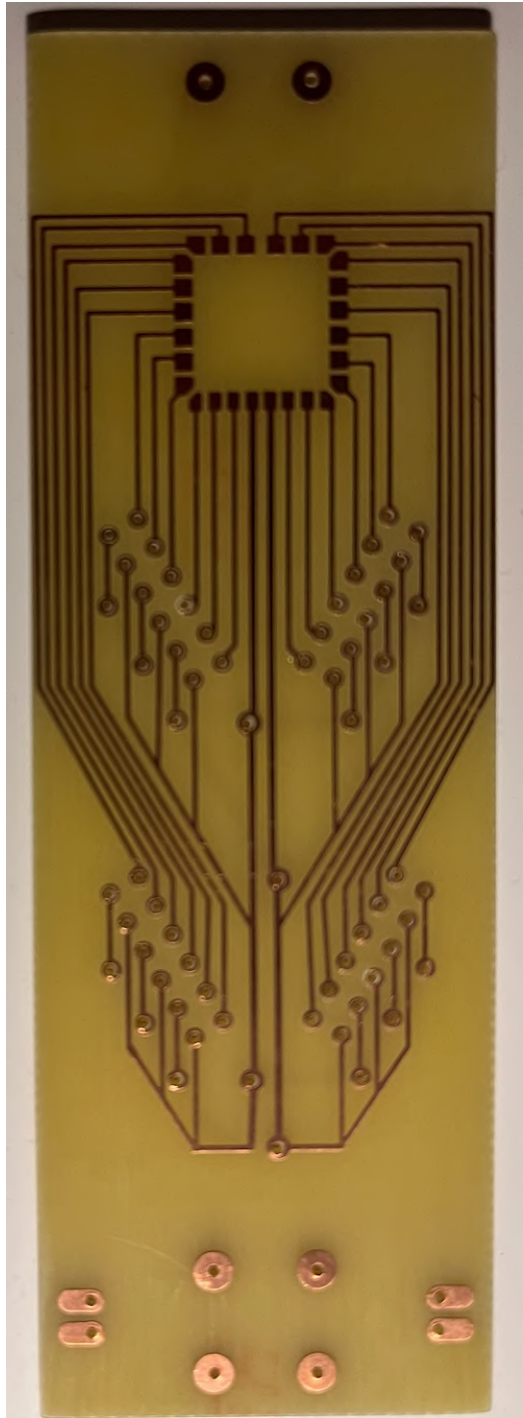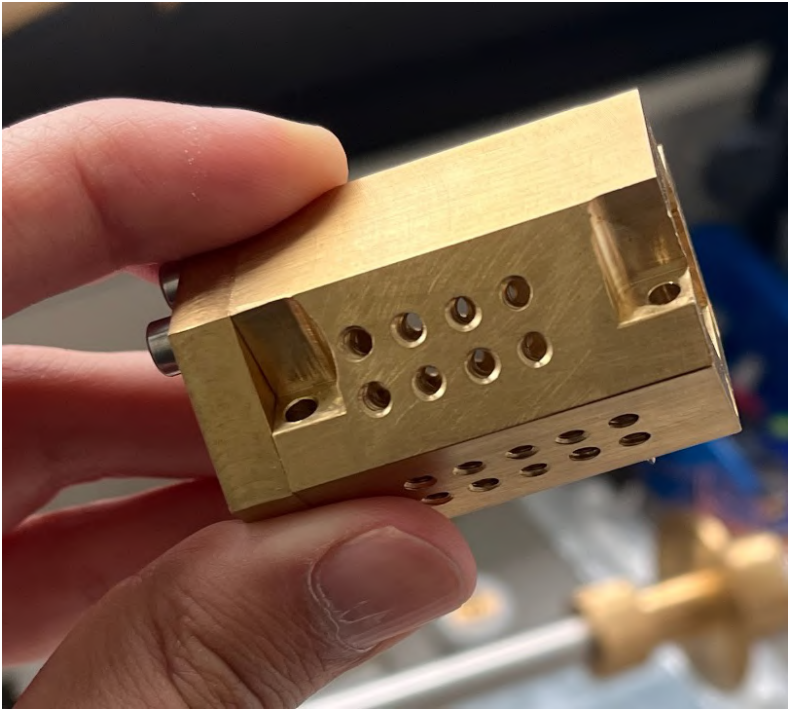

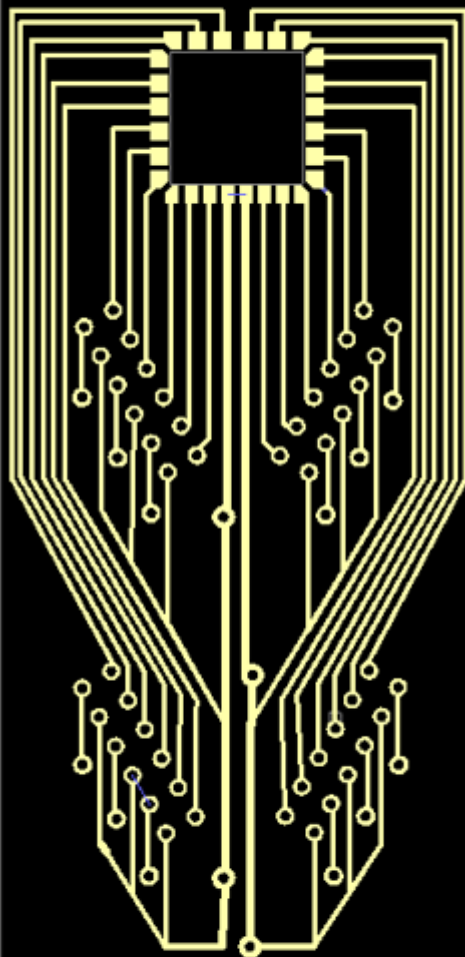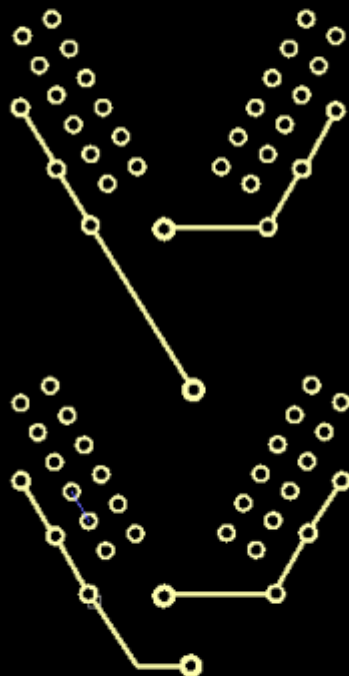

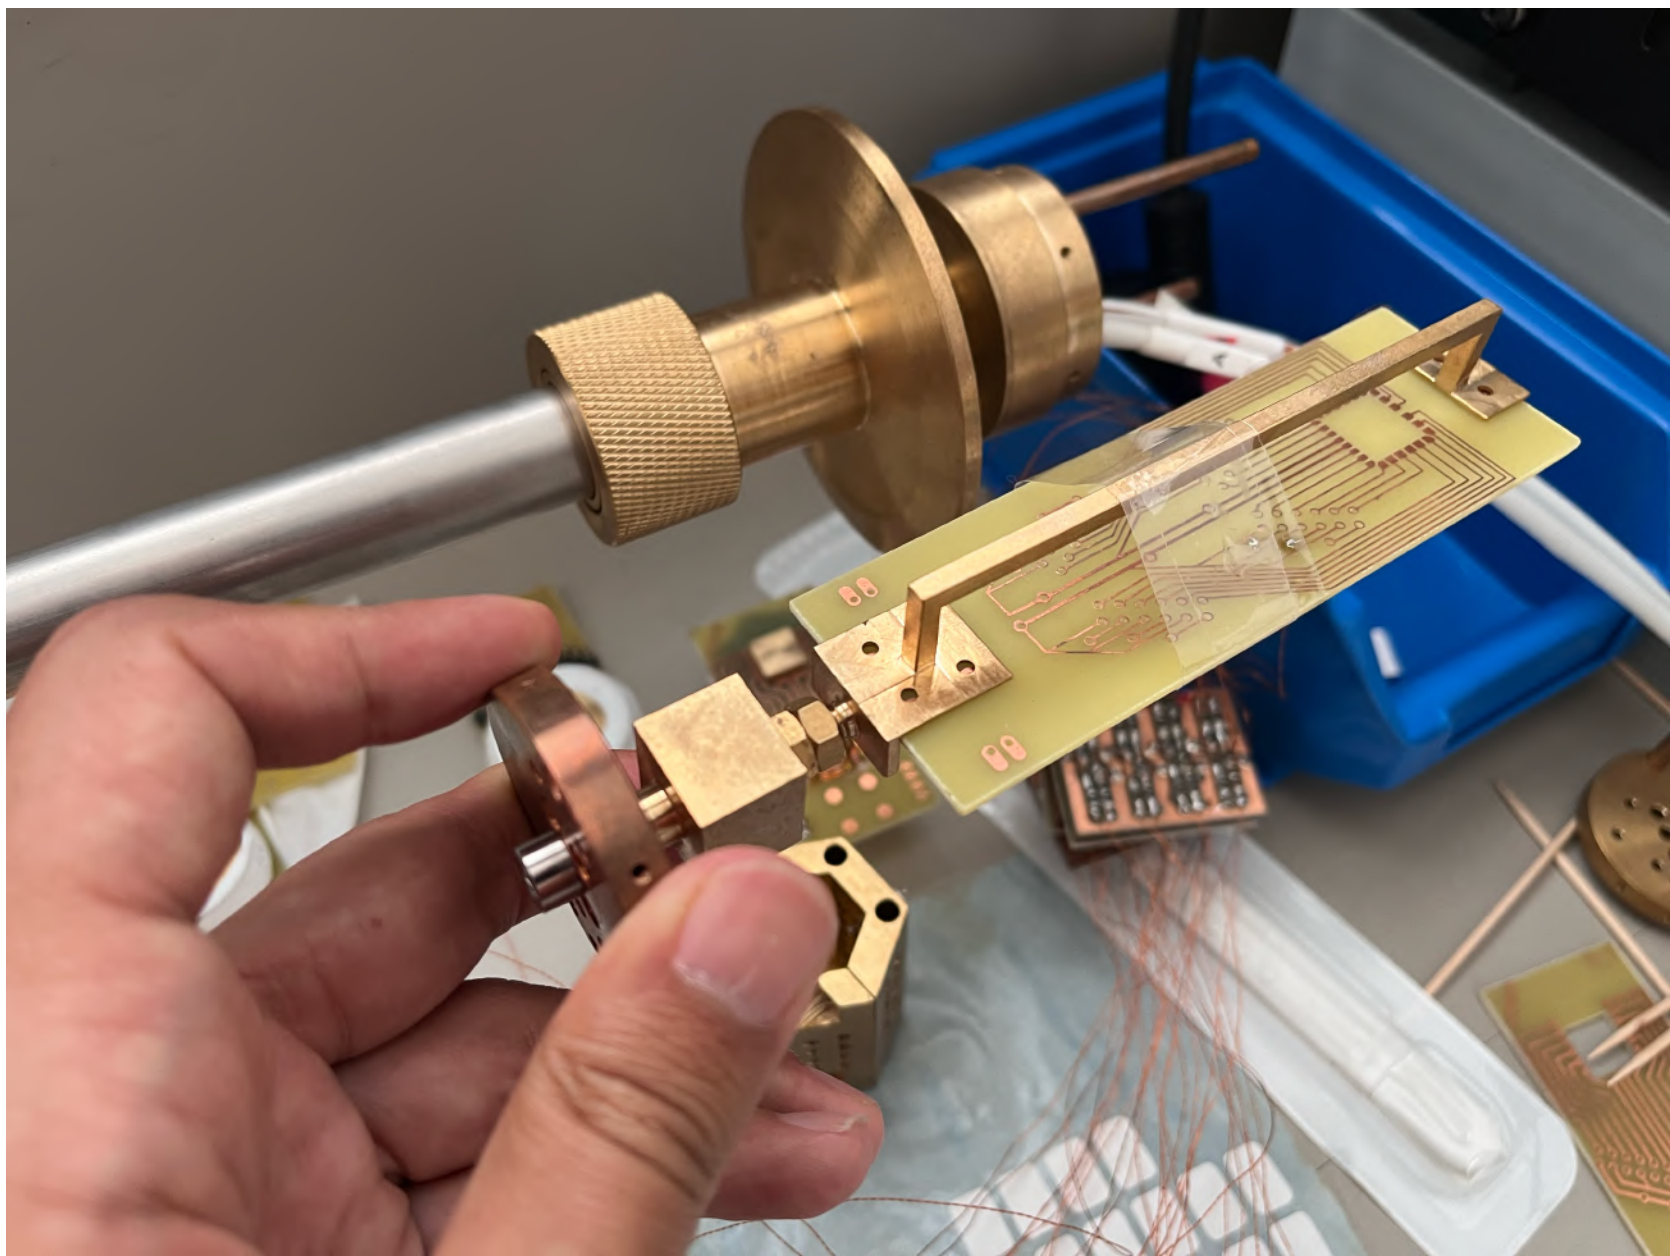

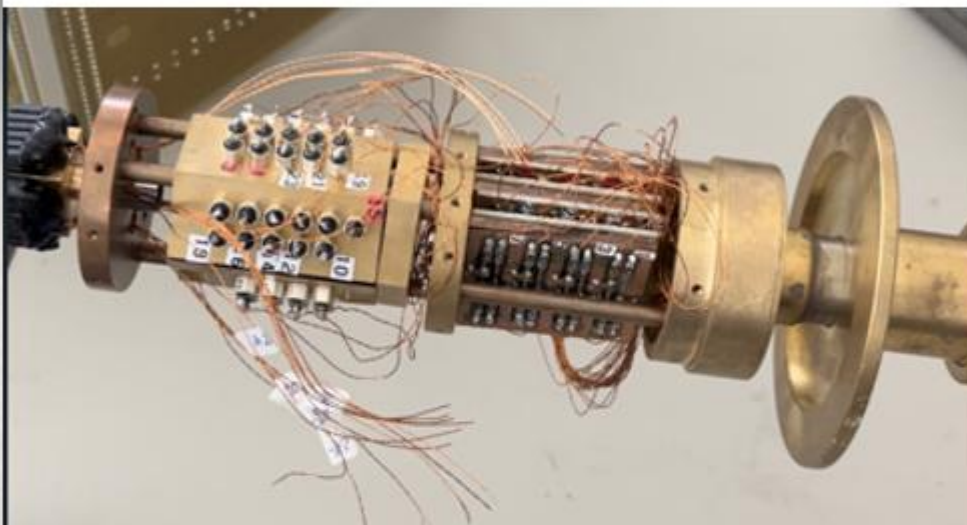

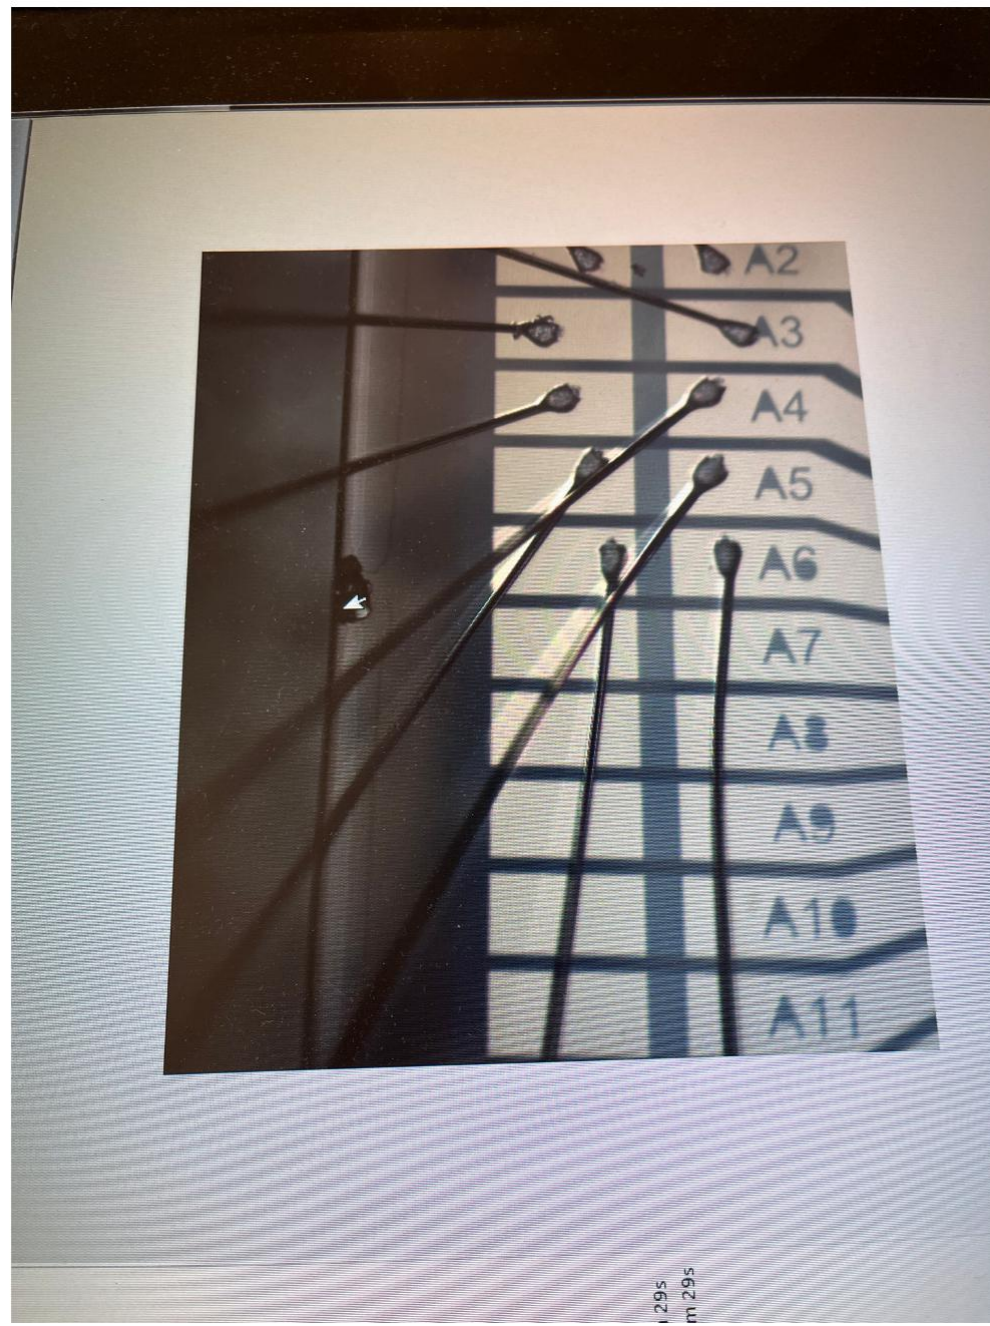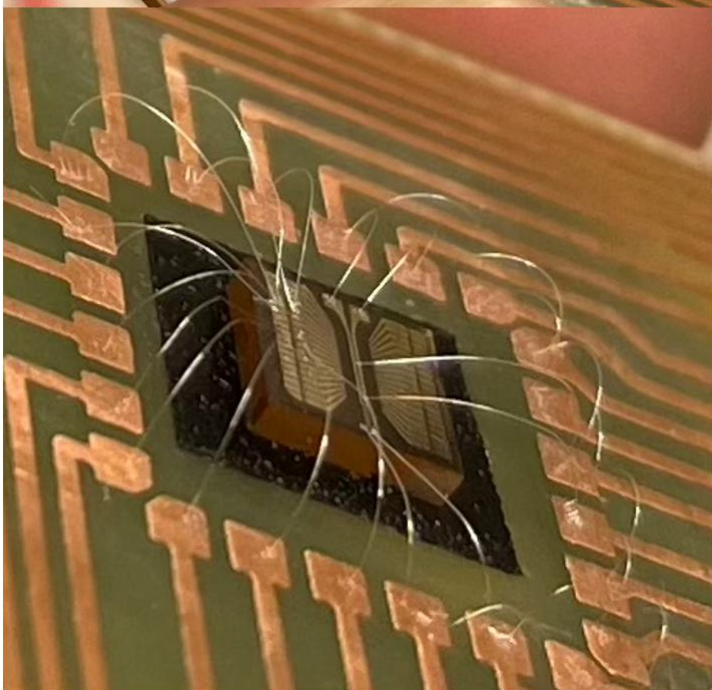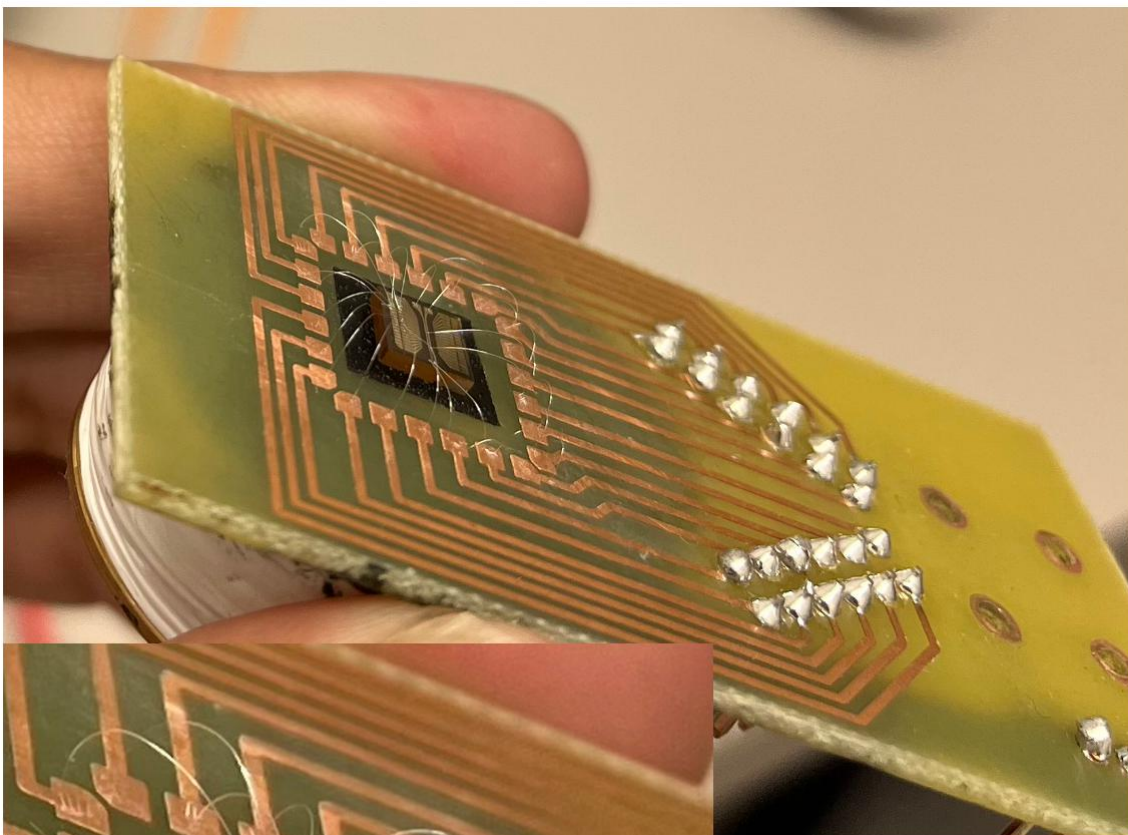

klay out

