

Power

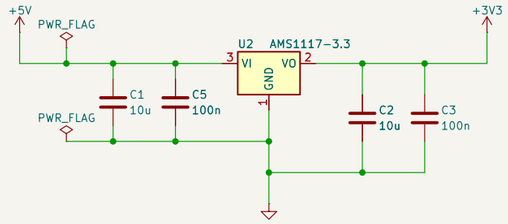


+5V from CAN J1/J2 or UART1 TP1.
AMS1117 -1 W with one E28 transmitting: copper pour.

CAN

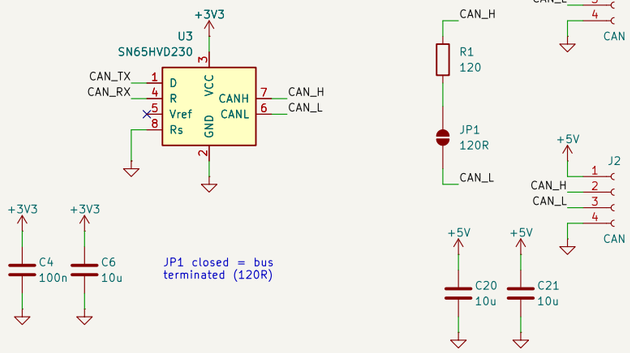


UART1 / UART2

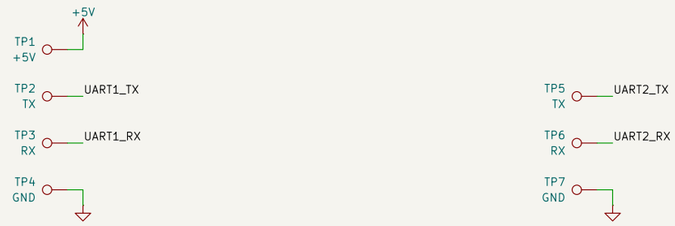

UART1 (PA9 / PA10): serial + ROM bootloader


UART2 (PA2 / PA3): OUT

MCU — STM32F103C8T6

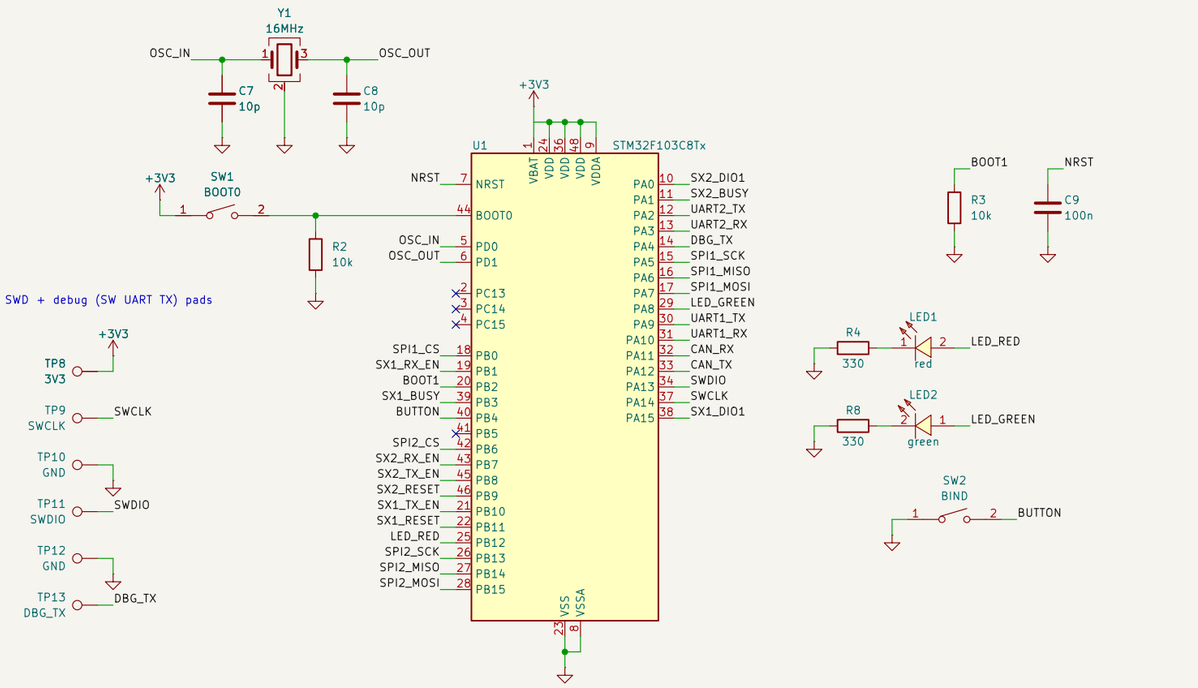


SWD + debug (SW UART TX) pads

Radio 1 — E28 (top)

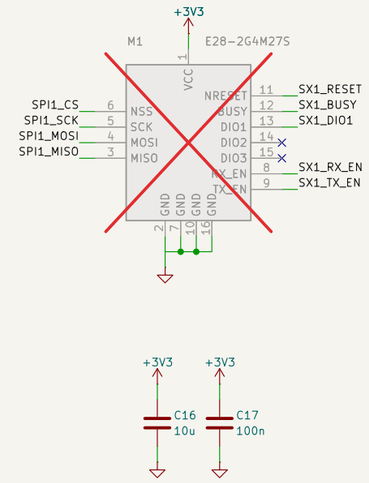


Top side. M1 hand-soldered (DNP).
DIO2/DIO3 unused.

Radio 2 — E28 (bottom)

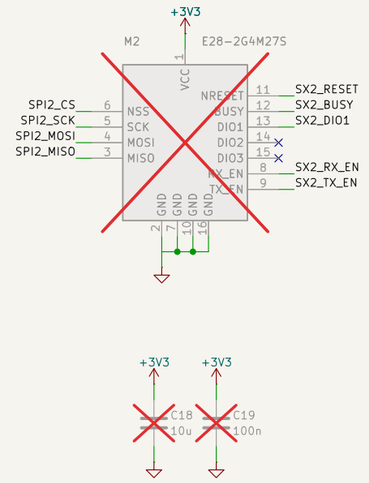

Bottom side. M2, C18, C19 hand-soldered (DNP), 0805.
DIO2/DIO3 unused.

MCU Decoupling

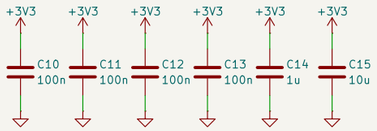

C10–C12: VDD 24/36/48
(VBAT 1 shares 48)
C13+C14: VDDA 9
C15: bulk

Sheet: /
File: F1-CAN-Receiver.kicad_sch

Title: F1-CAN-Receiver

Size: A3	Date: 2026-10-25	**Rev: 1.3**
KiCad E.D.A. 10.0.3		Id: 1/1