


3V3 Regulator | 250mA



RF Module

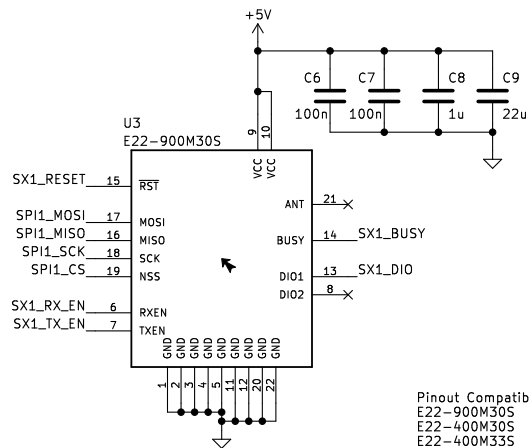


Figure 1: Pin connections for the evaluation board. The diagram shows three columns of pin connections. The first column shows TP1 connected to +BATT and TP2 connected to ground. The second column shows TP3 to UART1_TX, TP4 to UART1_RX, TP5 to UART2_TX, TP6 to UART2_RX, TP7 to LPUART1_TX, TP8 to LPUART1_RX, TP9 to SWDIO, TP10 to SWCLK, and TP11 connected to ground. The third column shows J2 pin 1 to +3V3, J2 pin 2 to BOOT0, J2 pin 3 to ground, and J2 pin 4 to BUTTON.