Manual Chapter : Creating a Basic Web Site and E-commerce Configuration

Applies To:

Show Versions

Configuring a Simple Intranet

Configuring ISP Load Balancing

Routing Based on XML Content

Configuring nPath Routing

Configuring Layer 3 nPath Routing

Creating a Basic Web Site and E-commerce Configuration

Installing a BIG-IP System Without Changing the IP Network

Enabling IP Address Intelligence

Configuring Content Adaptation for HTTP Requests

Configuring Content Adaptation for HTTP Requests and Responses

Configuring HTTP Load Balancing with Source Address Affinity Persistence

Configuring HTTP Load Balancing with Cookie Persistence

Compressing HTTP Responses

Using Via Headers to Acquire Information About Intermediate Routers

Configuring the BIG-IP System as a Reverse Proxy Server

Load Balancing Passive Mode FTP Traffic

Load Balancing Passive Mode FTP Traffic with Data Channel Optimization

Configuring the BIG-IP System as a DHCP Relay Agent

Configuring the BIG-IP System for DHCP Renewal

Configuring a One-IP Network Topology

Configuring the BIG-IP System to Auto-Populate Pools

Implementing Health and Performance Monitoring

Preventing TCP Connection Requests From Being Dropped

Setting Connection Limits

Load Balancing to IPv6 Nodes

Mitigating Denial of Service Attacks

Implementing APM System Authentication

Configuring an SSL Intercept Explicit Proxy Mode

Configuring an Explicit HTTP Proxy Chain

Manipulating HTTPS Traffic by Using a Third-Party Device

Legal Notices

Creating a Basic Web Site and E-commerce Configuration

Overview: Basic web site and eCommerce configuration

The most common use for the BIG-IP system is distributing traffic across an array of web servers that host standard web traffic, including eCommerce traffic. The following illustration shows a configuration where a BIG-IP system load balances two sites: *www.siterequest.com* and *store.siterequest.com*. The *www.siterequest.com* site provides standard web content, and the *store.siterequest.com* site is the e-commerce site that sells items to *www.siterequest.com* customers.

Illustration of basic web site and eCommerce configuration

Basic web site and eCommerce configuration

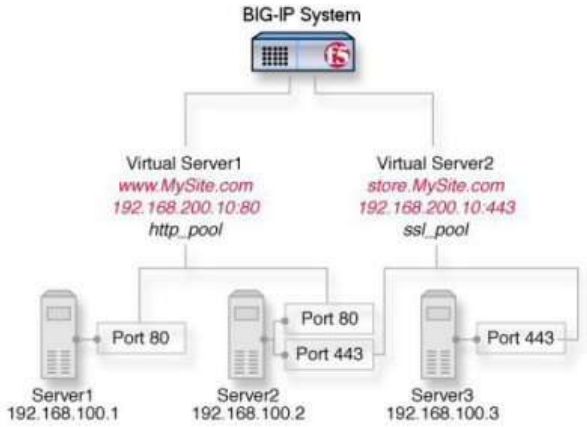

Basic site and ecommerce load balancing config

You can implement a basic configuration for load balancing application traffic to a web site, as well as load balancing secure traffic to an eCommerce site.

Before you use this implementation:

- Verify that you have created two VLANs on the BIG-IP system. One VLAN should reside on the external network and another on the internal network.
- Verify that you have created a self IP address for each VLAN.

Creating a pool to process HTTP traffic

You can create a pool of web servers to process HTTP requests.

1. On the Main tab, click **Local Traffic** › **Pools** .
   The Pool List screen opens.
2. Click **Create.**
   The New Pool screen opens.
3. In the **Name** field, type a unique name for the pool.

4. For the **Health Monitors** setting, from the **Available** list, select the **http** monitor and move the monitor to the **Active** list.
5. From the **Load Balancing Method** list, select how the system distributes traffic to members of this pool.

   The default is **Round Robin**.
6. For the **Priority Group Activation** setting, specify how to handle priority groups:
   - Select **Disabled** to disable priority groups. This is the default option.
   - Select **Less than**, and in the **Available Members** field type the minimum number of members that must remain available in each priority group in order for traffic to remain confined to that group.
7. Using the **New Members** setting, add each resource that you want to include in the pool:
   a. Type an IP address in the **Address** field.
   b. Type `80` in the **Service Port** field, or select **HTTP** from the list.
   c. (Optional) Type a priority number in the **Priority** field.
   d. Click **Add**.
8. Click **Finished**.

The new pool appears in the Pools list.

Creating a pool to manage HTTPS traffic

You can create a pool (a logical set of devices, such as web servers, that you group together to receive and process HTTPS traffic) to efficiently distribute the load on your server resources.

1. On the Main tab, click **Local Traffic › Pools** .
   The Pool List screen opens.
2. Click **Create**.
   The New Pool screen opens.
3. In the **Name** field, type a unique name for the pool.
4. For the **Health Monitors** setting, assign **https** or **https_443** by moving it from the **Available** list to the **Active** list.
5. From the **Load Balancing Method** list, select how the system distributes traffic to members of this pool.

   The default is **Round Robin**.
6. For the **Priority Group Activation** setting, specify how to handle priority groups:
   - Select **Disabled** to disable priority groups. This is the default option.
   - Select **Less than**, and in the **Available Members** field type the minimum number of members that must remain available in each priority group in order for traffic to remain confined to that group.
7. Use the **New Members** setting to add each resource that you want to include in the pool:
   a. In the **Address** field, type an IP address.
   b. In the **Service Port** field type `443` , or select **HTTPS** from the list.
   c. (Optional) Type a priority number in the **Priority** field.
   d. Click **Add**.
8. Click **Finished**.

The HTTPS load balancing pool appears in the Pool List screen.

Creating a virtual server to manage HTTP traffic

You can create a virtual server to manage HTTP traffic as either a host virtual server or a network virtual server.

1. On the Main tab, click **Local Traffic › Virtual Servers .**
   The Virtual Server List screen opens.
2. Click **Create.**
   The New Virtual Server screen opens.
3. In the **Name** field, type a unique name for the virtual server.
4. For the **Destination Address/Mask** setting, confirm that the **Host** button is selected, and type the IP address in CIDR format.

   The supported format is address/prefix, where the prefix length is in bits. For example, an IPv4 address/prefix is `10.0.0.1` or `10.0.0.0/24`, and an IPv6 address/prefix is `ffe1::0020/64` or `2001:ed8:77b5:2:10:10:100:42/64`. When you use an IPv4 address without specifying a prefix, the BIG-IP system automatically uses a `/32` prefix.

   The IP address you type must be available and not in the loopback network.
5. In the **Service Port** field, type `80`, or select **HTTP** from the list.
6. From the **HTTP Profile** list, select **http.**
7. From the **HTTP Compression Profile** list, select one of the following profiles:
   - **httpcompression**
   - **wan-optimized-compression**
   - A customized profile
8. From the **Web Acceleration Profile** list, select one of the following profiles:
   - **optimized-acceleration**
   - **optimized-caching**
   - **webacceleration**
   - A customized profile
9. In the Resources area of the screen, from the **Default Pool** list, select the relevant pool name.
10. Click **Finished.**

The HTTP virtual server appears in the list of existing virtual servers on the Virtual Server List screen.

Creating a virtual server to manage HTTPS traffic

You can specify a virtual server to be either a host virtual server or a network virtual server to manage HTTPS traffic.

1. On the Main tab, click **Local Traffic › Virtual Servers .**
   The Virtual Server List screen opens.
2. Click **Create.**
   The New Virtual Server screen opens.
3. In the **Name** field, type a unique name for the virtual server.
4. For the **Destination Address/Mask** setting, confirm that the **Host** button is selected, and type the IP address in CIDR format.

   The supported format is address/prefix, where the prefix length is in bits. For example, an IPv4 address/prefix is `10.0.0.1` or `10.0.0.0/24`, and an IPv6 address/prefix is `ffe1::0020/64` or `2001:ed8:77b5:2:10:10:100:42/64`. When you use an IPv4 address without specifying a prefix, the BIG-IP system automatically uses a `/32` prefix.

   The IP address you type must be available and not in the loopback network.
5. Type `443` in the **Service Port** field, or select **HTTPS** in the list.
6. Select **http** in the **HTTP Profile** list.

7. From the **HTTP Compression Profile** list, select one of the following profiles:
    - **httpcompression**
    - **wan-optimized-compression**
    - A customized profile
8. From the **Web Acceleration Profile** list, select one of the following profiles:
    - **optimized-acceleration**
    - **optimized-caching**
    - **webacceleration**
    - A customized profile
9. For the **SSL Profile (Client)** setting, from the **Available** list, select **clientssl**, and using the Move button, move the name to the **Selected** list.
10. Click **Finished.**

The HTTPS virtual server appears in the Virtual Server List screen.

Contact Support

HAVE A QUESTION?
Support and Sales >

FOLLOW US

ABOUT F5
Corporate Information
Newsroom

EDUCATION
Training
Certification

F5 SITES
F5.com
DevCentral

SUPPORT TASKS
Read Support Policies

Investor Relations
Careers
About AskF5
F5 University
Free Online Training
Support Portal
Partner Central
F5 Labs
Create Service
Request
Leave feedback [+]

©2023 F5, Inc. All rights reserved.

Trademarks Policies Privacy California Privacy Do Not Sell My Personal Information
Cookie Preferences