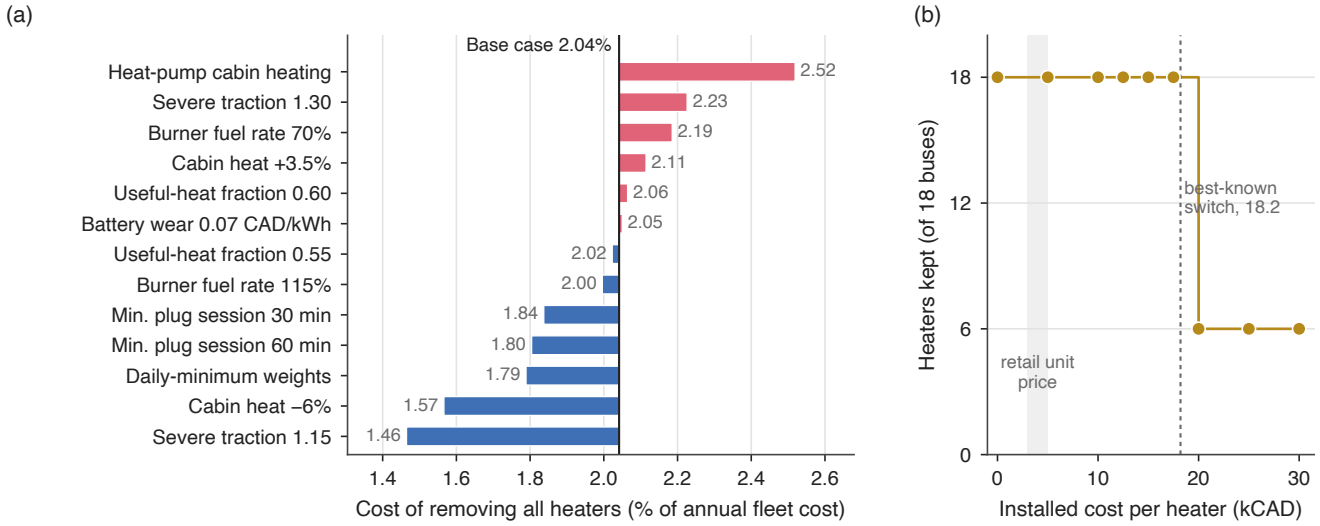
(a)
Base case 2.04%
Heat-pump cabin heating
Severe traction 1.30
Burner fuel rate 70%
Cabin heat +3.5%
Useful-heat fraction 0.60
Battery wear 0.07 CAD/kWh
Useful-heat fraction 0.55
Burner fuel rate 115%
Min. plug session 30 min
Min. plug session 60 min
Daily-minimum weights
Cabin heat −6%
Severe traction 1.15
2.52
2.23
2.19
2.11
2.06
2.05
2.02
2.00
1.84
1.80
1.79
1.57
1.46
1.4
1.6
1.8
2.0
2.2
2.4
2.6
Cost of removing all heaters (% of annual fleet cost)
(b)
Heaters kept (of 18 buses)
18
12
6
0
best-known
switch, 18.2
retail unit
price
0
10
20
30
Installed cost per heater (kCAD)