## ML5I/ML10I/ML15I

### **MATERIAL LIFTS**



- A high specification material lift with heavy duty load capacity
- Narrow design to manoeuvre through a standard doorway without tilting back
- Robust and reliable, built to handle the demands of the rental industry
- Features a dual-handle, shift- on-the-fly, two-speed winch for improved productivity



### **MATERIAL LIFTS**


# **ML5I/ML10I/ML15I**

DIMENSIONS	M5I	ML10I	ML15I
Lift height – forks up	2.0m	3.4m	4.8m
Lift height – forks down	1.4m	2.7m	4.3m
Stowed width (A)	0.77m	0.77m	0.77m
Stabiliser width <b>(B)</b>	1.63m	1.63m	1.63m
Stowed length	0.85m	0.85m	0.85m
Operating length (C)	1.57m	1.57m	1.7m
Stowed height (D)	1.9m	1.9m	1.9m
Fork width (outside)	0.58m	0.58m	0.58m
Fork length <b>(E)</b>	0.76m	0.76m	0.76m
Ground clearance	60mm	60mm	60mm


PERFORMANCE			
Max. load capacity (0.36m load center)	454kg	408kg	363kg
Max. load capacity (0.61m load center)	340kg	340kg	318kg
Max. load capacity (1.07m load center)	159kg	159kg	147kg
Min. load height	150mm	150mm	150mm
Winch (high speed)		13.1 cranks/m	
Winch (low speed)		49.2 cranks/m	


WEIGHT		þ	
Weight	89kg	106kg	122kg

#### LOAD CAPACITY - STANDARD FORKS

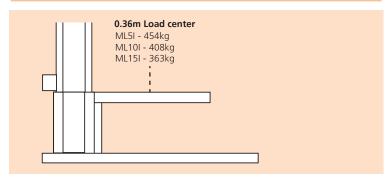

#### LOAD CAPACITY - EXTENDED FORKS

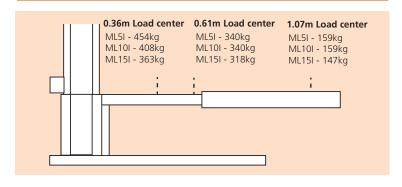

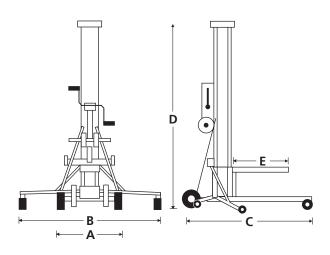

#### STANDARD FEATURES

- Mast brake
- Cable guard
- Dual-handle, two-speed shift-on-fly winch
- Metal cable pulleys with sealed bearings
- Heavy-gauge aluminum extrusions
- Heavy duty, non-marking casters
- Crane attachment point
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

#### **OPTIONS**

- Special paint colors
- Adjustable forks
- Boom
- Pipe cradle
- Fork extensions
- Load platform
- Stabilizers with non-marking swivel casters
- Non-marking rear transport wheel package
- Smart latch



P.O. Box 1160 St.Joseph, MO 64502-1160, USA Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317

Fax: 1 (785) 989-3070