



# **SAN administration**

## **ONTAP 9**

NetApp  
August 10, 2023

# Table of Contents

- SAN administration. . . . . 1
  - SAN provisioning . . . . . 1
  - NVMe provisioning . . . . . 8
  - Manage LUNs . . . . . 18
  - Manage igroups and portsets . . . . . 30
  - Manage iSCSI protocol . . . . . 36
  - Manage FC protocol . . . . . 46
  - Manage NVMe protocol . . . . . 48
  - Manage systems with FC adapters . . . . . 52
  - Manage LIFs for all SAN protocols . . . . . 58
  - Recommended volume and file or LUN configuration combinations . . . . . 64

# SAN administration

## SAN provisioning

### SAN management overview

The content in this section shows you how to configure and manage SAN environments with the ONTAP command line interface (CLI) and System Manager in ONTAP 9.7 and later releases.

If you are using the classic System Manager (available only in ONTAP 9.7 and earlier), see these topics:

- [iSCSI protocol](#)
- [FC/FCoE protocol](#)

You can use the iSCSI and FC protocols to provide storage in a SAN environment.



With iSCSI and FC, storage targets are called LUNs (logical units) and are presented to hosts as standard block devices. You create LUNs and then map them to initiator groups (igroups). Initiator groups are tables of FC host WWPs and iSCSI host node names and control which initiators have access to which LUNs.

FC targets connect to the network through FC switches and host-side adapters and are identified by world-wide port names (WWPNs). iSCSI targets connect to the network through standard Ethernet network adapters (NICs), TCP offload engine (TOE) cards with software initiators, converged network adapters (CNAs) or dedicated host bus adapters (HBAs) and are identified by iSCSI qualified names (IQNs).

## Configure switches for FCoE

You must configure your switches for FCoE before your FC service can run over the existing Ethernet infrastructure.

### What you'll need

- Your SAN configuration must be supported.

For more information about supported configurations, see the [NetApp Interoperability Matrix Tool](#).

- A Unified Target Adapter (UTA) must be installed on your storage system.

If you are using a UTA2, it must be set to `cna` mode.

- A converged network adapter (CNA) must be installed on your host.

### Steps

1. Use your switch documentation to configure your switches for FCoE.
2. Use the `dcb show` command to verify that the DCB settings for each node in the cluster have been correctly configured.

```
run -node node1 -command dcb show
```

DCB settings are configured on the switch. Consult your switch documentation if the settings are incorrect.

3. Use the `fcp adapter show` command to verify that the FCoE login is working when the FC target port online status is `true`.

```
cluster1::> fcp adapter show -fields node,adapter,status,state,speed,fabric-established,physical-protocol
```

If the FC target port online status is `false`, consult your switch documentation.

### Related information

[NetApp Interoperability Matrix Tool](#)

[NetApp Technical Report 3800: Fibre Channel over Ethernet \(FCoE\) End-to-End Deployment Guide](#)

[Cisco MDS 9000 NX-OS and SAN-OS Software Configuration Guides](#)

[Brocade products](#)

## System Requirements

Setting up LUNs involves creating a LUN, creating an igroup, and mapping the LUN to the igroup. Your system must meet certain prerequisites before you can set up your

## LUNs.

- The Interoperability Matrix must list your SAN configuration as supported.
- Your SAN environment must meet the SAN host and controller configuration limits specified in [NetApp Hardware Universe](#) for your version of the ONTAP software.
- A supported version of Host Utilities must be installed.

The Host Utilities documentation provides more information.

- You must have SAN LIFs on the LUN owning node and the owning node's HA partner.

### Related information

[NetApp Interoperability Matrix Tool](#)

[ONTAP SAN Host Configuration](#)

[NetApp Technical Report 4017: Fibre Channel SAN Best Practices](#)

## What to know before you create a LUN

### Why actual LUN sizes slightly vary

You should be aware of the following regarding the size of your LUNs.

- When you create a LUN , the actual size of the LUN might vary slightly based on the OS type of the LUN. The LUN OS type cannot be modified after the LUN is created.
- If you create a LUN at the max LUN size, be aware that the actual size of the LUN might be slightly less. ONTAP rounds down the limit to be slightly less.
- The metadata for each LUN requires approximately 64 KB of space in the containing aggregate. When you create a LUN, you must ensure that the containing aggregate has enough space for the LUN's metadata. If the aggregate does not contain enough space for the LUN's metadata, some hosts might not be able to access the LUN.

### Guidelines for assigning LUN IDs

Typically, the default LUN ID begins with 0 and is assigned in increments of 1 for each additional mapped LUN. The host associates the LUN ID with the location and path name of the LUN. The range of valid LUN ID numbers depends on the host. For detailed information, see the documentation provided with your Host Utilities.

### Guidelines for mapping LUNs to igroups

- You can map a LUN only once to an igroup.
- As a best practice, you should map a LUN to only one specific initiator through the igroup.
- You can add a single initiator to multiple igroups, but the initiator can be mapped to only one LUN.
- You cannot use the same LUN ID for two LUNs mapped to the same igroup.
- You should use the same protocol type for igroups and port sets.


## Verify and add your protocol FC or iSCSI license

Before you can enable block access for a storage virtual machine (SVM) with FC or iSCSI, you must have a license.

### Example 1. Steps

#### System Manager

Verify and add your FC or iSCSI license with ONTAP System Manager (9.7 and later).

1. In System Manager, select **Cluster > Settings > Licenses**
2. If the license is not listed, select  and enter the license key.
3. Select **Add**.

#### CLI

Verify and add your FC or iSCSI license with the ONTAP CLI.

1. Verify that you have a active license for FC or iSCSI.

```
system license show
```

Package	Type	Description	Expiration
-----	-----	-----	-----
Base	site	Cluster Base License	-
NFS	site	NFS License	-
CIFS	site	CIFS License	-
iSCSI	site	iSCSI License	-
FCP	site	FCP License	-

2. If you do not have a active license for FC or iSCSI, add your license code.

```
license add -license-code your_license_code
```

## Provision SAN storage

This procedure creates new LUNs on an existing storage VM which already has the FC or iSCSI protocol configured.

If you need to create a new storage VM and configure the FC or iSCSI protocol, see [Configure an SVM for FC](#) or [Configure an SVM for iSCSI](#).

If the FC license is not enabled, the LIFs and SVMs appear to be online but the operational status is down.

LUNs appear to your host as disk devices.



Asymmetric logical unit access (ALUA) is always enabled during LUN creation. You cannot change the ALUA setting.

You must use single initiator zoning for all of the FC LIFs in the SVM to host the initiators.

Unresolved directive in san-admin/provision-storage.adoc -  
include::\_include/98\_qos\_enabled\_by\_default.adoc[]

## Example 2. Steps

### System Manager

Create LUNs to provide storage for a SAN host using the FC or iSCSI protocol with ONTAP System Manager (9.7 and later).

To complete this task using System Manager Classic (available with 9.7 and earlier) refer to [iSCSI configuration for Red Hat Enterprise Linux](#)

### Steps

1. Install the appropriate [SAN host utilities](#) on your host.
2. In System Manager, click **Storage > LUNs** and then click **Add**.
3. Enter the required information to create the LUN.

Unresolved directive in san-admin/provision-storage.adoc -  
include::\_include/san\_add\_lun\_more\_options.adoc[]

5. For FC, zone your FC switches by WWPN. Use one zone per initiator and include all target ports in each zone.
6. Discover LUNs on your host.

For VMware vSphere, use Virtual Storage Console (VSC) to discover and initialize your LUNs.

7. Initialize the LUNs and optionally, create file systems.
8. Verify that the host can write and read data on the LUN.

### CLI

Create LUNs to provide storage for a SAN host using the FC or iSCSI protocol with the ONTAP CLI.

1. Verify that you have a license for FC or iSCSI.

```
system license show
```

Package	Type	Description	Expiration
Base	site	Cluster Base License	-
NFS	site	NFS License	-
CIFS	site	CIFS License	-
iSCSI	site	iSCSI License	-
FCP	site	FCP License	-

2. If you do not have a license for FC or iSCSI, use the `license add` command.

```
license add -license-code <your_license_code>
```



3. Enable your protocol service on the SVM:

**For iSCSI:**

```
vserver iscsi create -vserver <svm_name> -target-alias <svm_name>
```

**For FC:**

```
vserver fcp create -vserver <svm_name> -status-admin up
```

4. Create two LIFs for the SVMs on each node:

```
network interface create -vserver <svm_name> -lif <lif_name> -role  
data -data-protocol <iscsi|fc> -home-node <node_name> -home-port  
<port_name> -address <ip_address> -netmask <netmask>
```

NetApp supports a minimum of one iSCSI or FC LIF per node for each SVM serving data. However, two LIFS per node are required for redundancy.

5. Verify that your LIFs have been created and that their operational status is online:

```
network interface show -vserver <svm_name> <lif_name>
```

6. Create your LUNs:

```
lun create -vserver <svm_name> -volume <volume_name> -lun <lun_name>  
-size <lun_size> -ostype linux -space-reserve <enabled|disabled>
```

Your LUN name cannot exceed 255 characters and cannot contain spaces.



The NVFAIL option is automatically enabled when a LUN is created in a volume.

7. Create your igroups:

```
igroup create -vserver <svm_name> -igroup <igroup_name> -protocol  
<fcp|iscsi|mixed> -ostype linux -initiator <initiator_name>
```

8. Map your LUNs to igroups:

```
lun mapping create -vserver <svm_name> -volume <volume_name> -lun  
<lun_name> -igroup <igroup_name>
```

9. Verify that your LUNs are configured correctly:

```
lun show -vserver <svm_name>
```

. Optionally, `xref:{relative_path}create-port-sets-binding-igroups-task.html`[Create a port set and bind to an igroup].

. Follow steps in your host documentation for enabling block access on your specific hosts.

. Use the Host Utilities to complete the FC or iSCSI mapping and to discover your LUNs on the host.

### Related information

[SAN Administration overview](#)

[ONTAP SAN Host Configuration](#)

[View and manage SAN initiator groups in System Manager](#)

[NetApp Technical Report 4017: Fibre Channel SAN Best Practices](#)

## NVMe provisioning

### NVMe Overview

You can use the non-volatile memory express (NVMe) protocol to provide storage in a SAN environment. The NVMe protocol is optimized for performance with solid state storage.

For NVMe, storage targets are called namespaces. An NVMe namespace is a quantity of non-volatile storage that can be formatted into logical blocks and presented to a host as a standard block device. You create namespaces and subsystems, and then map the namespaces to the subsystems, similar to the way LUNs are provisioned and mapped to igroups for FC and iSCSI.

NVMe targets are connected to the network through a standard FC infrastructure using FC switches or a standard TCP infrastructure using Ethernet switches and host-side adapters.

Support for NVMe varies based on your version of ONTAP. See [NVMe support and limitations](#) for details.

### What NVMe is

The nonvolatile memory express (NVMe) protocol is a transport protocol used for accessing nonvolatile storage media.

NVMe over Fabrics (NVMeoF) is a specification-defined extension to NVMe that enables NVMe-based communication over connections other than PCIe. This interface allows for external storage enclosures to be connected to a server.

NVMe is designed to provide efficient access to storage devices built with non-volatile memory, from flash technology to higher performing, persistent memory technologies. As such, it does not have the same

limitations as storage protocols designed for hard disk drives. Flash and solid state devices (SSDs) are a type of non-volatile memory (NVM). NVM is a type of memory that keeps its content during a power outage. NVMe is a way that you can access that memory.

The benefits of NVMe include increased speeds, productivity, throughput, and capacity for data transfer. Specific characteristics include the following:

- NVMe is designed to have up to 64 thousand queues.

Each queue in turn can have up to 64 thousand concurrent commands.

- NVMe is supported by multiple hardware and software vendors
- NVMe is more productive with Flash technologies enabling faster response times
- NVMe allows for multiple data requests for each “request” sent to the SSD.

NVMe takes less time to decode a “request” and does not require thread locking in a multithreaded program.

- NVMe supports functionality that prevents bottlenecking at the CPU level and enables massive scalability as systems expand.

### **About NVMe namespaces**

An NVMe namespace is a quantity of non-volatile memory (NVM) that can be formatted into logical blocks. Namespaces are used when a storage virtual machine is configured with the NVMe protocol and are the equivalent of LUNs for FC and iSCSI protocols.

One or more namespaces are provisioned and connected to an NVMe host. Each namespace can support various block sizes.

The NVMe protocol provides access to namespaces through multiple controllers. Using NVMe drivers, which are supported on most operating systems, solid state drive (SSD) namespaces appear as standard-block devices on which file systems and applications can be deployed without any modification.

A namespace ID (NSID) is an identifier used by a controller to provide access to a namespace. When setting the NSID for a host or host group, you also configure the accessibility to a volume by a host. A logical block can only be mapped to a single host group at a time, and a given host group does not have any duplicate NSIDs.

### **About NVMe subsystems**

An NVMe subsystem includes one or more NVMe controllers, namespaces, NVM subsystem ports, an NVM storage medium, and an interface between the controller and the NVM storage medium. When you create an NVMe namespace, by default it is not mapped to a subsystem. You can also choose to map it a new or existing subsystem.

### **Related information**

- [Provision NVMe storage](#)
- [Map an NVMe namespace to a subsystem](#)
- [Configure SAN hosts and cloud clients](#)

## NVMe license requirements

Beginning with ONTAP 9.5 a license is required to support NVMe. If NVMe is enabled in ONTAP 9.4, a 90 day grace period is given to acquire the license after upgrading to ONTAP 9.5.

You can enable the license using the following command:

```
system license add -license-code NVMe_license_key
```

## NVMe support and limitations

NVMe support and limitations vary based on your version of ONTAP, your platform and your configuration. For details on your specific configuration, see the [NetApp Interoperability Matrix Tool](#).

Protocol support

Protocol	Beginning with ONTAP...	Allowed by...
TCP	9.10.1	Default
FC	9.4	Default

Beginning with ONTAP 9.8, you can configure SCSI, NAS and NVMe protocols on the same storage virtual machine (SVM).

In ONTAP 9.7 and earlier, NVMe can be the only protocol on the SVM.

## Platform and configuration support and limitations

NVMe/FC and NVMe/TCP protocols are supported as follows. NVMe/FC is supported on the platforms listed below only with 32GB FC HBAs.



- Beginning with ONTAP 9.12.1, 4-node MetroCluster IP configurations are supported on NVMe/FC.
- MetroCluster configurations are not supported on NVMe/TCP.
- MetroCluster configurations are not supported for NVMe prior to 9.12.1.

Beginning with ONTAP...	Platforms	Max nodes per cluster
9.12.1	<ul style="list-style-type: none"><li>• AFF</li><li>• ASA</li></ul>	12
9.10.1	<ul style="list-style-type: none"><li>• AFF</li><li>• ASA</li></ul>	4
9.9.1	<ul style="list-style-type: none"><li>• AFF</li><li>• ASA</li></ul>	4

9.4	AFF only	4
-----	----------	---

## Namespace support and limitations

NVMe namespace support varies based on your version of ONTAP.

Beginning with ONTAP...	NVMe namespaces support...
9.10.1	<a href="#">Resizing</a>  Resizing a namespace is not supported in releases prior to ONTAP 9.10.1.
9.8	LUNs and namespaces can be mixed on the same volume.
9.6	<ul style="list-style-type: none"> <li>512 byte blocks and 4096 byte blocks</li> </ul> <p>4096 is the default value. 512 should only be used if the host operating system does not support 4096 byte blocks.</p> <ul style="list-style-type: none"> <li>Volume move with mapped namespaces</li> </ul>

Also, when working with NVMe namespaces, you should be aware of the following:

- If you lose data in a LUN, it cannot be restored from a namespace, or vice versa.
- The space guarantee for namespaces is the same as the space guarantee of the containing volume.
- You cannot create a namespace on a volume transition from Data ONTAP operating in 7-mode.
- Namespaces do not support the following:

- Renaming

You cannot rename a namespace.

- Inter-volume move
- Inter-volume copy
- Copy on Demand

## Multipath HA pair failover/giveback

Beginning with ONTAP 9.5, NVMe supports multipath HA pair failover/giveback.

## Additional limitations

- The following ONTAP features are not supported by NVMe configurations:
  - Sync
  - Virtual Storage Console
- The following applies only to nodes running ONTAP 9.4:
  - NVMe LIFs and namespaces must be hosted on the same node.

- The NVMe service must be created before the NVMe LIF is created.

See the [NetApp Hardware Universe](#) for a complete list of NVMe limits.

#### **Related information**

[Best practices for modern SAN](#)

## **Configure a storage VM for NVMe**

If you want to use the NVMe protocol on a node, you must configure your SVM specifically for NVMe.

#### **What you'll need**

Your FC or Ethernet adapters must support NVMe. Supported adapters are listed in the [NetApp Hardware Universe](#).

### Example 3. Steps

#### System Manager

Configure an storage VM for NVMe with ONTAP System Manager (9.7 and later).

To configure NVMe on a new storage VM	To configure NVMe on an existing storage VM
<ol style="list-style-type: none"><li>1. In System Manager, click <b>Storage &gt; Storage VMs</b> and then click <b>Add</b>.</li><li>2. Enter a name for the storage VM.</li><li>3. Select <b>NVMe</b> for the <b>Access Protocol</b>.</li><li>4. Select <b>Enable NVMe/FC</b> or <b>Enable NVMe/TCP</b> and <b>Save</b>.</li></ol>	<ol style="list-style-type: none"><li>1. In System Manager, click <b>Storage &gt; Storage VMs</b>.</li><li>2. Click on the storage VM you want to configure.</li><li>3. Click on the <b>Settings</b> tab, and then click  next to the NVMe protocol.</li><li>4. Select <b>Enable NVMe/FC</b> or <b>Enable NVMe/TCP</b> and <b>Save</b>.</li></ol>

#### CLI

Configure an storage VM for NVMe with the ONTAP CLI.

1. If you do not want to use an existing SVM, create one:

```
vserver create -vserver SVM_name
```

- a. Verify that the SVM is created:

```
vserver show
```

2. Verify that you have NVMe or TCP capable adapters installed in your cluster:

For NVMe: `network fcp adapter show -data-protocols-supported fc-nvme`

For TCP: `network port show`

3. If you are running ONTAP 9.7 or earlier, remove all protocols from the SVM:

```
vserver remove-protocols -vserver SVM_name -protocols  
iscsi,fcp,nfs,cifs,ndmp
```

Beginning with ONTAP 9.8, it is not necessary to remove other protocols when adding NVMe.

4. Add the NVMe protocol to the SVM:

```
vserver add-protocols -vserver SVM_name -protocols nvme
```

5. If you are running ONTAP 9.7 or earlier, verify that NVMe is the only protocol allowed on the SVM:

```
vserver show -vserver SVM_name -fields allowed-protocols
```

NVMe should be the only protocol displayed under the `allowed protocols` column.

6. Create the NVMe service:

```
vserver nvme create -vserver SVM_name
```

7. Verify that the NVMe service was created:

```
vserver nvme show -vserver SVM_name
```

The Administrative Status of the SVM should be listed as up.

8. Create an NVMe/FC LIF:

ONTAP version	Applicable protocols	Command
ONTAP 9.9.1 or earlier	FC	<pre>network interface create -vserver <i>SVM_name</i> -lif lif_name -role data -data-protocol fc-nvme -home-node home_node -home-port home_port</pre>
ONTAP 9.10.1	FC or TCP	<pre>network interface create -vserver <i>SVM_name</i> -lif lif_name -service-policy {default-data-nvme-tcp   default-data-nvme-fc} -home-node home_node -home-port home_port -status admin up -failover-policy disabled -firewall -policy data -auto -revert false -failover -group failover_group -is-dns-update-enabled false</pre>

9. Create an NVMe/FC LIF on the HA partner node:

ONTAP version	Applicable protocols	Command
ONTAP 9.9.1 or earlier	FC	<pre>network interface create -vserver <i>SVM_name</i> -lif lif_name -role data -data-protocol fc-nvme -home-node home_node -home-port home_port</pre>



ONTAP version	Applicable protocols	Command
ONTAP 9.10.1 or later	FC or TCP	<pre>network interface create -vserver SVM_name -lif lif_name -service-policy {default-data-nvme-tcp   default-data-nvme-fc} -home-node home_node -home-port home_port -status admin up -failover-policy disabled -firewall -policy data -auto -revert false -failover -group failover_group -is-dns-update-enabled false</pre>

10. Verify the NVMe/FC LIFs were created:

```
network interface show -vserver SVM_name
```

11. Create volume on the same node as the LIF:

```
vol create -vserver SVM_name -volume vol_name -aggregate aggregate_name
-size volume_size
```

If a warning message is displayed about the auto efficiency policy, it can be safely ignored.

## Provision NVMe storage

If a procedure for your specific host is not available, you can use these steps to create namespaces and provision storage for any NVMe supported host.

This procedure creates new namespaces on an existing storage VM. Your storage VM must be configured for NVMe, and your FC or TCP transport should already be set up.

Beginning with ONTAP 9.8, when you provision storage, QoS is enabled by default. You can disable QoS or choose a custom QoS policy during the provisioning process or at a later time.

## System Manager

Using ONTAP System Manager (9.7 and later), create namespaces to provide storage using the NVMe protocol.

### Steps

1. In System Manager, click **Storage > NVMe Namespaces** and then click **Add**.

If you need to create a new subsystem, click **More Options**.

2. If you are running ONTAP 9.8 or later and you want to disable QoS or choose a custom QoS policy, click **More Options** and then, under **Storage and Optimization** select **Performance Service Level**.
3. Zone your FC switches by WWPN. Use one zone per initiator and include all target ports in each zone.
4. On your host, discover the new namespaces.
5. Initialize the namespace and format it with a file system.
6. Verify that your host can write and read data on the namespace.

### CLI

Using the ONTAP CLI, create namespaces to provide storage using the NVMe protocol.

This procedure creates an NVMe namespace and subsystem on an existing storage VM which has already been configured for the NVMe protocol, then maps the namespace to the subsystem to allow data access from your host system.

If you need to configure the storage VM for NVMe, see [Configure an SVM for NVMe](#).

### Steps

1. Verify that the SVM is configured for NVMe:

```
vserver show -vserver <svm_name> -fields allowed-protocols
```

NVMe should be displayed under the allowed-protocols column.

2. Create the NVMe namespace:

```
vserver nvme namespace create -vserver <svm_name> -path <path> -size  
<size_of_namespace> -ostype <OS_type>
```

3. Create the NVMe subsystem:

```
vserver nvme subsystem create -vserver <svm_name> -subsystem  
<name_of_subsystem> -ostype <OS_type>
```

The NVMe subsystem name is case sensitive. It must contain 1 to 96 characters. Special characters are allowed.

4. Verify that the subsystem was created:

```
vserver nvme subsystem show -vserver <svm_name>
```

The `nvme` subsystem should be displayed under the `Subsystem` column.

5. Obtain the NQN from the host.
6. Add the host NQN to the subsystem:

```
vserver nvme subsystem host add -vserver <svm_name> -subsystem  
<subsystem_name> -host-nqn <Host_NQN>
```

7. Map the namespace to the subsystem:

```
vserver nvme subsystem map add -vserver <svm_name> -subsystem  
<subsystem_name> -path <path>
```

A namespace can only be mapped to a single subsystem.

8. Verify that the namespace is mapped to the subsystem:

```
vserver nvme namespace show -vserver <svm_name> -instance
```

The subsystem should be listed as the `Attached` subsystem.

## Map an NVMe namespace to a subsystem

This procedure maps an existing NVMe namespace to an existing NVMe subsystem using the ONTAP CLI.

Your namespace and subsystem should already be created. If you need to create a namespace and subsystem, see [Provision NVMe storage](#).

### Steps

1. Obtain the NQN from the host.
2. Add the host NQN to the subsystem:

```
vserver nvme subsystem host add -vserver SVM_name -subsystem subsystem_name  
-host-nqn Host_NQN:subsystem.subsystem_name
```

3. Map the namespace to the subsystem:

```
vserver nvme subsystem map add -vserver SVM_name -subsystem subsystem_name  
-path path
```

A namespace can only be mapped to a single subsystem.

4. Verify that the namespace is mapped to the subsystem:

```
vserver nvme namespace show -vserver SVM_name -instance
```

The subsystem should be listed as the `Attached` subsystem.

## Manage LUNs

### Edit LUN QoS policy group

Beginning with ONTAP 9.10.1, you can use System Manager to assign or remove Quality of Service (QoS) policies on multiple LUNs at the same time.



If the QoS policy is assigned at the volume level, it must be changed at the volume level. You can only edit the QoS policy at the LUN level if it was originally assigned at the LUN level.

#### Steps

1. In System Manager, click **Storage > LUNs**.
2. Select the LUN or LUNs you want to edit.

If you are editing more than one LUN at a time, the LUNs must belong to the same Storage Virtual Machine (SVM). If you select LUNs that do not belong to the same SVM, the option to edit the QoS Policy Group is not displayed.

3. Click **More** and select **Edit QoS Policy Group**.

### Convert a LUN into a namespace

Beginning with ONTAP 9.11.1, you can use the ONTAP CLI to in-place convert an existing LUN to an NVMe namespace.

#### What you'll need

- Specified LUN should not have any existing maps to an igroup.
- LUN should not be in a MetroCluster configured SVM or in an SM-BC relationship.
- LUN should not be a protocol endpoint or bound to a protocol endpoint.
- LUN should not have non-zero prefix and/or suffix stream.
- LUN should not be part of a snapshot or on the destination side of SnapMirror relationship as a read-only LUN.

#### Steps

1. You enter the following command to convert a LUN to an NVMe namespace:

```
vserver nvme namespace convert-from-lun -vserver -lun-path
```


## Take a LUN offline

Beginning with ONTAP 9.10.1 you can use System Manager to take LUNs offline. Prior to ONTAP 9.10.1, you must use the ONTAP CLI to take LUNs offline.

### System Manager

#### Steps

1. In System Manager, click **Storage>LUNs**.
2. Take a single LUN or multiple LUNs offline

If you want to...	Do this...
Take a single LUN offline	Next to the LUN name, click  and select <b>Take Offline</b> .
Take multiple LUNs offline	<ol style="list-style-type: none"><li>a. Select the LUNs you want to take offline.</li><li>b. Click <b>More</b> and select <b>Take Offline</b>.</li></ol>

### CLI

You can only take one LUN offline at a time when using the CLI.

#### Step

1. Take the LUN offline: `lun offline lun_name -vserver SVM_name`

## Resize a LUN

You can increase or decrease the size of a LUN.



Solaris LUNs cannot be resized.

### Increase the size of a LUN

The size to which you can increase your LUN varies depending upon your version of ONTAP.

ONTAP version	Maximum LUN size
ONTAP 9.12.1P2 and later	128 TB for AFF, FAS, and ASA platforms
ONTAP 9.8 and later	<ul style="list-style-type: none"><li>• 128 TB for All SAN Array (ASA) platforms</li><li>• 16 TB for non-ASA platforms</li></ul>
ONTAP 9.5, 9.6, 9.7	16TB

ONTAP 9.4 or earlier	<p>10 times the original LUN size, but not greater than 16TB, which is the maximum LUN size.</p> <p>For example, if you create a 100 GB LUN, you can only grow it to 1,000 GB.</p> <p>The actual maximum size of the LUN might not be exactly 16TB. ONTAP rounds down the limit to be slightly less.</p>
----------------------	--

You do not need to take the LUN offline to increase the size. However, after you have increased the size, you must rescan the LUN on the host for the host to recognize the change in size.

See the Command Reference page for the `lun resize` command for more information about resizing a LUN.

#### Example 4. Steps

##### System Manager

Increase the size of a LUN with ONTAP System Manager (9.7 and later).

1. In System Manager, click **Storage > LUNs**.
2. Click  and select **Edit**.
3. Under **Storage and Optimization** increase the size of the LUN and **Save**.

##### CLI

Increase the size of a LUN with the ONTAP CLI.

1. Increase the size of the LUN:

```
lun resize -vserver vsERVER_name -volume volume_name -lun lun_name -size
lun_size
```

2. Verify the increased LUN size:

```
lun show -vserver vsERVER_name
```



ONTAP operations round down the actual maximum size of the LUN so it is slightly less than the expected value. Also, actual LUN size might vary slightly based on the OS type of the LUN. To obtain the exact resized value, run the following commands in advanced mode:

```
set -unit B
```

```
lun show -fields max-resize-size -volume volume_name -lun
lun_name
```

3. Rescan the LUN on the host.
4. Follow your host documentation to make the newly created LUN size visible to the host file system.

## Decrease the size of a LUN

Before you decrease the size of a LUN, the host needs to migrate the blocks containing the LUN data into the boundary of the smaller LUN size. You should use a tool such as SnapCenter to ensure that the LUN is properly decreased without truncating blocks containing LUN data. Manually decreasing the size of your LUN is not recommended.

After you decrease the size of your LUN, ONTAP automatically notifies the initiator that the LUN size has decreased. However, additional steps might be required on your host for the host to recognize the new LUN size. Check your host documentation for specific information about decreasing the size of the host file structure.

## Move a LUN

You can move a LUN across volumes within a storage virtual machine (SVM), but you cannot move a LUN across SVMs. LUNs moved across volumes within an SVM are moved immediately and without loss of connectivity.

### What you'll need

If your LUN is using Selective LUN Map (SLM), the SLM reporting nodes must have been modified to include the destination node and its HA partner.

### About this task

Storage efficiency features, such as deduplication, compression, and compaction are not preserved during a LUN move. They must be reapplied after the LUN move is completed.

Data protection through Snapshot copies occurs at the volume level. Therefore, when you move a LUN, it falls under the data protection scheme of the destination volume. If you do not have Snapshot copies established for the destination volume, Snapshot copies of the LUN are not created. Also, all of the Snapshot copies of the LUN stay in the original volume until those Snapshot copies are deleted.

You cannot move a LUN to the following volumes:

- A SnapMirror destination volume
- The SVM root volume

You cannot move the following types of LUNs:

- A LUN that has been created from a file
- A LUN that is in NVFail state
- A LUN that is in a load-sharing relationship
- A protocol-endpoint class LUN



For Solaris `os_type` LUNs that are 1 TB or larger, the host might experience a timeout during the LUN move. For this LUN type, you should unmount the LUN before initiating the move.

## Example 5. Steps

### System Manager

Move a LUN with ONTAP System Manager (9.7 and later).

Beginning with ONTAP 9.10.1, you can use System Manager to create a new volume when you move a single LUN. In ONTAP 9.8 and 9.9.1, the volume to which you are moving your LUN must exist before you begin the LUN move.

#### Steps

1. In System Manager, click **Storage>LUNs**.
2. Right click the LUN you want to move, then click  and select **Move LUN**.

In ONTAP 9.10.1, select to move the LUN to **An existing volume** or to a **New volume**.

If you select to create a new volume, provide the volume specifications.

3. Click **Move**.

### CLI

Move a LUN with the ONTAP CLI.

1. Move the LUN:

```
lun move start.
```

During a very brief period, the LUN is visible on both the origin and destination volume. This is expected and is resolved upon completion of the move.

2. Track the status of the move and verify successful completion:

```
lun move show.
```

### Related information

- [Selective LUN Map](#)
- [Modifying the SLM reporting-nodes list](#)

## Delete LUNs

You can delete a LUN from a storage virtual machine (SVM) if you no longer need the LUN.

### What you'll need

The LUN must be unmapped from its igroup before you can delete it.

#### Steps

1. Verify that the application or host is not using the LUN.
2. Unmap the LUN from the igroup:



```
lun mapping delete
```

```
lun mapping delete -vserver vs5 -volume vo5 -lun lun5 -igroup igr5
```

### 3. Delete the LUN:

```
lun delete
```

```
lun delete -vserver vs5 -volume vol5 -lun lun5
```

### 4. Verify that you deleted the LUN:

```
lun show
```

```
lun show -vserver vs5
```

Vserver	Path	State	Mapped	Type	Size
vs5	/vol/vol16/lun8	online	mapped	windows	10.00GB

## What to know before copying LUNs

You should be aware of certain things before copying a LUN.

Cluster administrators can copy a LUN across storage virtual machines (SVMs) within the cluster by using the `lun copy` command. Cluster administrators must establish the storage virtual machine (SVM) peering relationship using the `vserver peer create` command before an inter-SVM LUN copy operation is performed. There must be enough space in the source volume for a SIS clone.

LUNs in Snapshot copies can be used as source LUNs for the `lun copy` command. When you copy a LUN using the `lun copy` command, the LUN copy is immediately available for read and write access. The source LUN is unchanged by creation of a LUN copy. Both the source LUN and the LUN copy exist as unique LUNs with different LUN serial numbers. Changes made to the source LUN are not reflected in the LUN copy, and changes made to the LUN copy are not reflected in the source LUN. The LUN mapping of the source LUN is not copied to the new LUN; the LUN copy must be mapped.

Data protection through Snapshot copies occurs at the volume level. Therefore, if you copy a LUN to a volume different from the volume of the source LUN, the destination LUN falls under the data protection scheme of the destination volume. If you do not have Snapshot copies established for the destination volume, Snapshot copies are not created of the LUN copy.

Copying LUNs is a nondisruptive operation.

You cannot copy the following types of LUNs:

- A LUN that has been created from a file
- A LUN that is in NVFAIL state
- A LUN that is in a load-sharing relationship
- A protocol-endpoint class LUN

## Examine configured and used space of a LUN

Knowing the configured space and actual space used for your LUNs can help you determine the amount of space that can be reclaimed when doing space reclamation, the amount of reserved space that contains data, and the total configured size versus the actual size used for a LUN.

### Step

1. View the configured space versus the actual space used for a LUN:

```
lun show
```

The following example show the configured space versus the actual space used by the LUNs in the vs3 storage virtual machine (SVM):

```
lun show -vserver vs3 -fields path, size, size-used, space-reserve
```

vserver	path	size	space-reserve	size-used
vs3	/vol/vol0/lun1	50.01GB	disabled	25.00GB
vs3	/vol/vol0/lun1_backup	50.01GB	disabled	32.15GB
vs3	/vol/vol0/lun2	75.00GB	disabled	0B
vs3	/vol/volspace/lun0	5.00GB	enabled	4.50GB

4 entries were displayed.

## Control and monitor I/O performance to LUNs by using Storage QoS

You can control input/output (I/O) performance to LUNs by assigning LUNs to Storage QoS policy groups. You might control I/O performance to ensure that workloads achieve specific performance objectives or to throttle a workload that negatively impacts other workloads.

### About this task

Policy groups enforce a maximum throughput limit (for example, 100 MB/s). You can create a policy group without specifying a maximum throughput, which enables you to monitor performance before you control the workload.

You can also assign storage virtual machines (SVMs) with FlexVol volumes and LUNs to policy groups.

Note the following requirements about assigning a LUN to a policy group:

- The LUN must be contained by the SVM to which the policy group belongs.

You specify the SVM when you create the policy group.

- If you assign a LUN to a policy group, then you cannot assign the LUN's containing volume or SVM to a policy group.

For more information about how to use Storage QoS, see the [System administration reference](#).

## Steps

1. Use the `qos policy-group create` command to create a policy group.
2. Use the `lun create` command or the `lun modify` command with the `-qos-policy-group` parameter to assign a LUN to a policy group.
3. Use the `qos statistics` commands to view performance data.
4. If necessary, use the `qos policy-group modify` command to adjust the policy group's maximum throughput limit.

## Tools available to effectively monitor your LUNs

Tools are available to help you effectively monitor your LUNs and avoid running out of space.

- Active IQ Unified Manager is a free tool that enables you to manage all storage across all clusters in your environment.
- System Manager is a graphical user interface built into ONTAP that enables you to manually manage storage needs at the cluster level.
- OnCommand Insight presents a single view of your storage infrastructure and enables you to set up automatic monitoring, alerts, and reporting when your LUNs, volumes, and aggregates are running out of storage space.

## Capabilities and restrictions of transitioned LUNs

In a SAN environment, a disruption in service is required during the transition of a 7-Mode volume to ONTAP. You need to shut down your hosts to complete the transition. After transition, you must update your host configurations before you can begin serving data in ONTAP.

You need to schedule a maintenance window during which you can shut down your hosts and complete the transition.

LUNs that have been transitioned from Data ONTAP operating in 7-Mode to ONTAP have certain capabilities and restrictions that affect the way the LUNs can be managed.

You can do the following with transitioned LUNs:

- View the LUN using the `lun show` command
- View the inventory of LUNs transitioned from the 7-Mode volume using the `transition 7-mode show` command
- Restore a volume from a 7-Mode Snapshot copy

Restoring the volume transitions all of the LUNs captured in the Snapshot copy

- Restore a single LUN from a 7-Mode Snapshot copy using the `snapshot restore-file` command
- Create a clone of a LUN in a 7-Mode Snapshot copy
- Restore a range of blocks from a LUN captured in a 7-Mode Snapshot copy
- Create a FlexClone of the volume using a 7-Mode Snapshot copy

You cannot do the following with transitioned LUNs:

- Access Snapshot copy-backed LUN clones captured in the volume

#### Related information

[Copy-based transition](#)

### I/O misalignments on properly aligned LUNs overview

ONTAP might report I/O misalignments on properly aligned LUNs. In general, these misalignment warnings can be disregarded as long as you are confident that your LUN is properly provisioned and your partitioning table is correct.

LUNs and hard disks both provide storage as blocks. Because the block size for disks on the host is 512 bytes, LUNs present blocks of that size to the host while actually using larger, 4-KB blocks to store data. The 512-byte data block used by the host is referred to as a logical block. The 4-KB data block used by the LUN to store data is referred to as a physical block. This means that there are eight 512-byte logical blocks in each 4-KB physical block.



The host operating system can begin a read or write I/O operation at any logical block. I/O operations are only considered aligned when they begin at the first logical block in the physical block. If an I/O operation begins at a logical block that is not also the start of a physical block, the I/O is considered misaligned. ONTAP automatically detects the misalignment and reports it on the LUN. However, the presence of misaligned I/O does not necessarily mean that the LUN is also misaligned. It is possible for misaligned I/O to be reported on properly aligned LUNs.

If you require further investigation, see the Knowledge Base article [How to identify unaligned IO on LUNs?](#)

For more information about tools for correcting alignment problems, see the following documentation: +

- [Windows Unified Host Utilities 7.1](#)
- [Virtual Storage Console for VMware vSphere Installation and Administration Guide](#)

## Achieve I/O alignment using LUN OS types

To achieve I/O alignment with your OS partitioning scheme, you should use the recommended ONTAP LUN `ostype` value that most closely matches your operating system.

The partition scheme employed by the host operating system is a major contributing factor to I/O misalignments. Some ONTAP LUN `ostype` values use a special offset known as a “prefix” to enable the default partitioning scheme used by the host operating system to be aligned.



In some circumstances, a custom partitioning table might be required to achieve I/O alignment. However, for `ostype` values with a “prefix” value greater than 0, a custom partition might create misaligned I/O.

The LUN `ostype` values in the following table should be used based on your operating system.

LUN <code>ostype</code>	Prefix (bytes)	Prefix (sectors)	Operating system
windows	32,256	63	Windows 2000, 2003 (MBR format)
windows_gpt	17,408	34	Windows 2003 (GPT format)
windows_2008	0	0	Windows 2008 and later
linux	0	0	All Linux distributions
xen	0	0	Citrix XenServer
vmware	0	0	VMware ESX
solaris	1MB	2,048	Solaris
solaris_efi	17,408	34	Solaris
hpux	0	0	HP-UX
aix	0	0	AIX

## Special I/O alignment considerations for Linux

Linux distributions offer a wide variety of ways to use a LUN including as raw devices for databases, various volume managers, and file systems. It is not necessary to create partitions on a LUN when used as a raw device or as physical volume in a logical volume.

For RHEL 5 and earlier and SLES 10 and earlier, if the LUN will be used without a volume manager, you should partition the LUN to have one partition that begins at an aligned offset, which is a sector that is an even multiple of eight logical blocks.

**Special I/O alignment considerations for Solaris LUNs**

You need to consider various factors when determining whether you should use the `solaris` ostype or the `solaris_efi` ostype.

See the [Solaris Host Utilities Installation and Administration Guide](#) for detailed information.

**ESX boot LUNs report as misaligned**

LUNs used as ESX boot LUNs are typically reported by ONTAP as misaligned. ESX creates multiple partitions on the boot LUN, making it very difficult to align. Misaligned ESX boot LUNs are not typically a performance problem because the total amount of misaligned I/O is small. Assuming that the LUN was correctly provisioned with the VMware ostype, no action is needed.

**Related information**

[Guest VM file system partition/disk alignment for VMware vSphere, other virtual environments, and NetApp storage systems](#)

**Ways to address issues when LUNs go offline**

When no space is available for writes, LUNs go offline to preserve data integrity. LUNs can run out of space and go offline for various reasons, and there are several ways you can address the issue.

If the...	You can...
Aggregate is full	<ul style="list-style-type: none"><li>• Add more disks.</li><li>• Use the <code>volume modify</code> command to shrink a volume that has available space.</li><li>• If you have space-guarantee volumes that have available space, change the volume space guarantee to <code>none</code> with the <code>volume modify</code> command.</li></ul>

If the...	You can...
Volume is full but there is space available in the containing aggregate	<ul style="list-style-type: none"> <li>• For space guarantee volumes, use the <code>volume modify</code> command to increase the size of your volume.</li> <li>• For thinly provisioned volumes, use the <code>volume modify</code> command to increase the maximum size of your volume.</li> </ul> <p>If volume autogrow is not enabled, use <code>volume modify -autogrow-mode</code> to enable it.</p> <ul style="list-style-type: none"> <li>• Delete Snapshot copies manually with the <code>volume snapshot delete</code> command, or use the <code>volume snapshot autodelete modify</code> command to automatically delete Snapshot copies.</li> </ul>

#### Related information

[Disk and aggregate management](#)

[Logical storage management](#)

## Troubleshoot iSCSI LUNs not visible on the host

The iSCSI LUNs appear as local disks to the host. If the storage system LUNs are not available as disks on the host, you should verify the configuration settings.

Configuration setting	What to do
Cabling	Verify that the cables between the host and storage system are properly connected.
Network connectivity	<p>Verify that there is TCP/IP connectivity between the host and storage system.</p> <ul style="list-style-type: none"> <li>• From the storage system command line, ping the host interfaces that are being used for iSCSI:</li> </ul> <pre>ping -node node_name -destination host_ip_address_for_iSCSI</pre> <ul style="list-style-type: none"> <li>• From the host command line, ping the storage system interfaces that are being used for iSCSI:</li> </ul> <pre>ping -node node_name -destination host_ip_address_for_iSCSI</pre>

Configuration setting	What to do
System requirements	Verify that the components of your configuration are qualified. Also, verify that you have the correct host operating system (OS) service pack level, initiator version, ONTAP version, and other system requirements. The Interoperability Matrix contains the most up-to-date system requirements.
Jumbo frames	If you are using jumbo frames in your configuration, verify that jumbo frames are enabled on all devices in the network path: the host Ethernet NIC, the storage system, and any switches.
iSCSI service status	Verify that the iSCSI service is licensed and started on the storage system.
Initiator login	Verify that the initiator is logged in to the storage system. If the <code>iscsi initiator show</code> command output shows no initiators are logged in, check the initiator configuration on the host. Also verify that the storage system is configured as a target of the initiator.
iSCSI node names (IQNs)	Verify that you are using the correct initiator node names in the igroup configuration. On the host, you can use the initiator tools and commands to display the initiator node name. The initiator node names configured in the igroup and on the host must match.
LUN mappings	Verify that the LUNs are mapped to an igroup. On the storage system console, you can use one of the following commands: <ul style="list-style-type: none"> <li>• <code>lun mapping show</code> displays all LUNs and the igroups to which they are mapped.</li> <li>• <code>lun mapping show -igroup</code> displays the LUNs mapped to a specific igroup.</li> </ul>
iSCSI LIFs enable	Verify that the iSCSI logical interfaces are enabled.

#### Related information

[NetApp Interoperability Matrix Tool](#)

## Manage igroups and portsets


### Ways to limit LUN access with portsets and igroups

In addition to using Selective LUN Map (SLM), you can limit access to your LUNs through igroups and portsets.


Portsets can be used with SLM to further restrict access of certain targets to certain initiators. When using SLM with portsets, LUNs will be accessible on the set of LIFs in the portset on the node that owns the LUN and on that node's HA partner.

In the following example, initiator1 does not have a portset. Without a portset, initiator1 can access LUN1 through both LIF1 and LIF2.



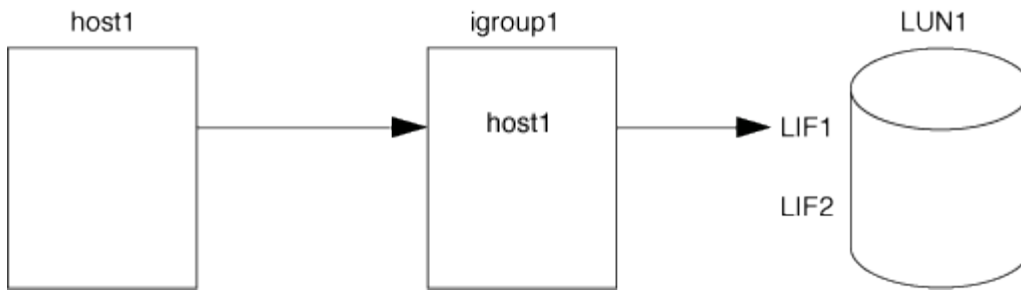

You can limit access to LUN1 by using a portset. In the following example, initiator1 can access LUN1 only through LIF1. However, initiator1 cannot access LUN1 through LIF2 because LIF2 is not in portset1.

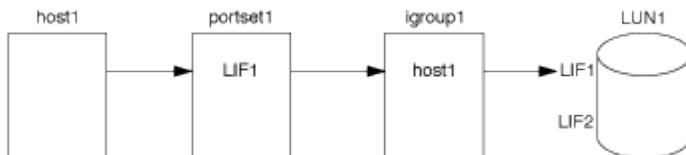

#### Related information

- [Selective LUN Map](#)
- [Create a portset and bind to an igroup](#)

## View and manage SAN initiators and igroups

You can use System Manager to view and manage initiator groups (igroups) and initiators.

#### About this task

- The initiator groups identify which hosts are able to access specific LUNs on the storage system.
- After an initiator and initiator groups are created, you can also edit them or delete them.
- To manage SAN initiators groups and initiators, you can perform the following tasks:
  - [View and manage SAN initiator groups](#)
  - [View and manage SAN initiators](#)

#### View and manage SAN initiator groups

You can use System Manager to view a list of initiator groups (igroups). From the list, you can perform additional operations.

#### Steps

1. In System Manager, click **Hosts > SAN Initiator Groups**.

The page displays a list of initiator groups (igroups). If the list is large, you can view additional pages of the list by clicking the page numbers at the lower right corner of the page.

The columns display various information about the igroups. Beginning with 9.11.1, the connection status of the igroup is also displayed. Hover over status alerts to view details.

2. (Optional): You can perform the following tasks by clicking the icons at the upper right corner of the list:
  - **Search**

- **Download** the list.
- **Show** or **Hide** columns in the list.
- **Filter** the data in the list.

3. You can perform operations from the list:

- Click  **Add** to add an igroup.
- Click the igroup name to view the **Overview** page that shows details about the igroup.

On the **Overview** page, you can view the LUNs associated with the igroup, and you can initiate the operations to create LUNs and map the LUNs. Click **All SAN Initiators** to return to the main list.

- Hover over the igroup, then click  next to an igroup name to edit or delete the igroup.
- Hover over the area to the left of the igroup name, then check the check box. If you click **+Add to Initiator Group**, you can add that igroup to another igroup.
- In the **Storage VM** column, click the name of a storage VM to view details about it.

## View and manage SAN initiators

You can use System Manager to view a list of initiators. From the list, you can perform additional operations.

### Steps

1. In System Manager, click **Hosts > SAN Initiator Groups**.

The page displays a list of initiator groups (igroups).

2. To view initiators, perform the following:

- Click the **FC Initiators** tab to view a list of FC initiators.
- Click the **iSCSI Initiators** tab to view a list of iSCSI initiators.

The columns display various information about the initiators.

Beginning with 9.11.1, the connection status of the initiator is also displayed. Hover over status alerts to view details.

3. (Optional): You can perform the following tasks by clicking the icons at the upper right corner of the list:

- **Search** the list for particular initiators.
- **Download** the list.
- **Show** or **Hide** columns in the list.
- **Filter** the data in the list.

## Create a nested igroup

Beginning with ONTAP 9.9.1, you can create an igroup that consists of other existing igroups.

1. In System Manager, click **Host > SAN Initiator Groups**, and then click **Add**.
2. Enter the igroup **Name** and **Description**.

The description serves as the igroup alias.

3. Select the **Storage VM** and **Host Operating System**.



The OS type of a nested igroup cannot be changed after the igroup is created.

4. Under **Initiator Group Members** select **Existing initiator group**.

You can use **Search** to find and select the initiator groups you want to add.

## Map igroups to multiple LUNs

Beginning with ONTAP 9.9.1, you can map igroups to two or more LUNs simultaneously.

1. In System Manager, click **Storage > LUNs**.
2. Select the LUNs you want to map.
3. Click **More**, then click **Map To Initiator Groups**.



The selected igroups are added to the selected LUNs. The pre-existing mappings are not overwritten.

## Create a portsets and bind to an igroup

In addition to using [Selective LUN Map \(SLM\)](#), you can create a portset and bind the portset to an igroup to further limit which LIFs can be used by an initiator to access a LUN.

If you do not bind a portset to an igroup, then all of the initiators in the igroup can access mapped LUNs through all of the LIFs on the node owning the LUN and the owning node's HA partner.

### What you'll need

You must have at least one LIF and one igroup.

Unless you are using interface groups, two LIFs are recommended for redundancy for both iSCSI and FC. Only one LIF is recommended for interface groups.

### About this task

It is advantageous to use portsets with SLM when you have more than two LIFs on a node and you want to restrict a certain initiator to a subset of LIFs. Without portsets, all targets on the node will be accessible by all of the initiators with access to the LUN through the node owning the LUN and the owning node's HA partner.

### Example 6. Steps

#### System Manager

Beginning with ONTAP 9.10.1, you can use System Manager to create portsets and bind them to igroups.

If you need to create a portset and bind it to an igroup in an ONTAP release earlier than 9.10.1 you must use the ONTAP CLI procedure.

1. In System Manager, click **Network > Overview > Portsets**, and click **Add**.
2. Enter the information for the new portset and click **Add**.
3. Click **Hosts > SAN Initiator Groups**.
4. To bind the portset to a new igroup, click **Add**.

To bind the portset to an existing igroup, select the igroup, click , and then click **Edit Initiator Group**.

#### Related information

[View and manage initiators and igroups](#)

#### CLI

1. Create a port set containing the appropriate LIFs:

```
portset create -vserver vservice_name -portset portset_name -protocol
protocol -port-name port_name
```

If you are using FC, specify the `protocol` parameter as `fc`. If you are using iSCSI, specify the `protocol` parameter as `iscsi`.

2. Bind the igroup to the port set:

```
lun igroup bind -vserver vservice_name -igroup igroup_name -portset
portset_name
```

3. Verify that your port sets and LIFs are correct:

```
portset show -vserver vservice_name
```


Vserver	Portset	Protocol	Port Names	Igroups
vs3	portset0	iscsi	lif0,lif1	igroup1

### Manage portsets

In addition to [Selective LUN Map \(SLM\)](#), you can use portsets to further limit which LIFs can be used by an initiator to access a LUN.

Beginning with ONTAP 9.10.1, you can use System Manager to change the network interfaces associated with portsets and to delete portsets.

## Change network interfaces associated with a portset

1. In System Manager, select **Network > Overview > Portsets**.
2. Select the portset you want to edit then , then select **Edit Portset**.

## Delete a portset

1. In System Manager, click **Network > Overview > Portsets**.
2. To delete a single portset, select the portset, select  and then select **Delete Portsets**.

To delete multiple portsets, select the portsets, and click **Delete**.

## Selective LUN Map overview

Selective LUN Map (SLM) reduces the number of paths from the host to the LUN. With SLM, when a new LUN map is created, the LUN is accessible only through paths on the node owning the LUN and its HA partner.

SLM enables management of a single igroup per host and also supports nondisruptive LUN move operations that do not require portset manipulation or LUN remapping.

Portsets can be used with SLM just as in previous versions of ONTAP to further restrict access of certain targets to certain initiators. When using SLM with portsets, LUNs will be accessible on the set of LIFs in the portset on the node that owns the LUN and on that node's HA partner.

SLM is enabled by default on all new LUN maps.

## Determine whether SLM is enabled on a LUN map

If your environment has a combination of LUNs created in ONTAP and LUNs transitioned from previous versions, you might need to determine whether Selective LUN Map (SLM) is enabled on a specific LUN.

You can use the information displayed in the output of the `lun mapping show -fields reporting-nodes, node` command to determine whether SLM is enabled on your LUN map. If SLM is not enabled, "-" is displayed in the cells under the "reporting-nodes" column of the command output. If SLM is enabled, the list of nodes displayed under the "nodes" column is duplicated in the "reporting-nodes" column.

## Modify the SLM reporting-nodes list

If you are moving a LUN or a volume containing LUNs to another high availability (HA) pair within the same cluster, you should modify the Selective LUN Map (SLM) reporting-nodes list before initiating the move to ensure that active, optimized LUN paths are maintained.

### Steps

1. Add the destination node and its partner node to the reporting-nodes list of the aggregate or volume:

```
lun mapping add-reporting-nodes -vserver vservice_name -path lun_path -igroup
igroup_name [-destination-aggregate aggregate_name|-destination-volume
volume_name]
```

If you have a consistent naming convention, you can modify multiple LUN mappings at the same time by using `igroup_prefix*` instead of `igroup_name`.

2. Rescan the host to discover the newly added paths.
3. If your OS requires it, add the new paths to your multipath network I/O (MPIO) configuration.
4. Run the command for the needed move operation and wait for the operation to finish.
5. Verify that I/O is being serviced through the Active/Optimized path:

```
lun mapping show -fields reporting-nodes
```

6. Remove the previous LUN owner and its partner node from the reporting-nodes list:

```
lun mapping remove-reporting-nodes -vserver vserver_name -path lun_path  
-igroup igroup_name -remote-nodes
```

7. Verify that the LUN has been removed from the existing LUN map:

```
lun mapping show -fields reporting-nodes
```

8. Remove any stale device entries for the host OS.
9. Change any multipathing configuration files if required.
10. Rescan the host to verify removal of old paths.  
See your host documentation for specific steps to rescan your hosts.

## Manage iSCSI protocol

### Configure your network for best performance

Ethernet networks vary greatly in performance. You can maximize the performance of the network used for iSCSI by selecting specific configuration values.

#### Steps

1. Connect the host and storage ports to the same network.

It is best to connect to the same switches. Routing should never be used.

2. Select the highest speed ports available, and dedicate them to iSCSI.

10 GbE ports are best. 1 GbE ports are the minimum.

3. Disable Ethernet flow control for all ports.

You should see [Network management](#) for using the CLI to configure Ethernet port flow control.

4. Enable jumbo frames (typically MTU of 9000).

All devices in the data path, including initiators, targets, and switches, must support jumbo frames. Otherwise, enabling jumbo frames actually reduces network performance substantially.

### Configure an SVM for iSCSI

To configure a storage virtual machine (SVM) for iSCSI, you must create LIFs for the SVM and assign the iSCSI protocol to those LIFs.

**About this task**

You need a minimum of one iSCSI LIF per node for each SVM serving data with the iSCSI protocol. For redundancy, you should create at least two LIFs per node.

## Example 7. Steps

### System Manager

Configure an storage VM for iSCSI with ONTAP System Manager (9.7 and later).

To configure iSCSI on a new storage VM	To configure iSCSI on an existing storage VM
<ol style="list-style-type: none"><li>1. In System Manager, click <b>Storage &gt; Storage VMs</b> and then click <b>Add</b>.</li><li>2. Enter a name for the storage VM.</li><li>3. Select <b>iSCSI</b> for the <b>Access Protocol</b>.</li><li>4. Click <b>Enable iSCSI</b> and enter the IP address and subnet mask for the network interface. + Each node should have at least two network interfaces.</li><li>5. Click <b>Save</b>.</li></ol>	<ol style="list-style-type: none"><li>1. In System Manager, click <b>Storage &gt; Storage VMs</b>.</li><li>2. Click on the storage VM you want to configure.</li><li>3. Click on the <b>Settings</b> tab, and then click  next to the iSCSI protocol.</li><li>4. Click <b>Enable iSCSI</b> and enter the IP address and subnet mask for the network interface. + Each node should have at least two network interfaces.</li><li>5. Click <b>Save</b>.</li></ol>

### CLI

Configure an storage VM for iSCSI with the ONTAP CLI.

1. Enable the SVMs to listen for iSCSI traffic:

```
vserver iscsi create -vserver vserver_name -target-alias vserver_name
```

2. Create a LIF for the SVMs on each node to use for iSCSI:

- For ONTAP 9.6 and later:

```
network interface create -vserver vserver_name -lif lif_name -data  
-protocol iscsi -service-policy default-data-iscsi -home-node node_name  
-home-port port_name -address ip_address -netmask netmask
```

- For ONTAP 9.5 and earlier:

```
network interface create -vserver vserver_name -lif lif_name -role data  
-data-protocol iscsi -home-node node_name -home-port port_name -address  
ip_address -netmask netmask
```

3. Verify that you set up your LIFs correctly:

```
network interface show -vserver vserver_name
```

4. Verify that iSCSI is up and running and the target IQN for that SVM:

```
vserver iscsi show -vserver vserver_name
```

5. From your host, create iSCSI sessions to your LIFs.

## Related information



## Define a security policy method for an initiator

You can define a list of initiators and their authentication methods. You can also modify the default authentication method that applies to initiators that do not have a user-defined authentication method.

### About this task

You can generate unique passwords using security policy algorithms in the product or you can manually specify the passwords that you want to use.



Not all initiators support hexadecimal CHAP secret passwords.

### Steps

1. Use the `vserver iscsi security create` command to create a security policy method for an initiator.

```
vserver iscsi security create -vserver vs2 -initiator iqn.1991-05.com.microsoft:host1 -auth-type CHAP -user-name bob1 -outbound-user-name bob2
```

2. Follow the screen commands to add the passwords.

Creates a security policy method for initiator iqn.1991-05.com.microsoft:host1 with inbound and outbound CHAP user names and passwords.

### Related information

- [How iSCSI authentication works](#)
- [CHAP authentication](#)

## Delete an iSCSI service for an SVM

You can delete an iSCSI service for a storage virtual machine (SVM) if it is no longer required.

### What you'll need

The administration status of the iSCSI service must be in the “down” state before you can delete an iSCSI service. You can move the administration status to down with the `vserver iscsi modify` command.

### Steps

1. Use the `vserver iscsi modify` command to stop the I/O to the LUN.

```
vserver iscsi modify -vserver vs1 -status-admin down
```

2. Use the `vserver iscsi delete` command to remove the iscsi service from the SVM.

```
vserver iscsi delete -vserver vs_1
```

3. Use the `vserver iscsi show` command to verify that you deleted the iSCSI service from the SVM.

```
vserver iscsi show -vserver vs1
```

## Get more details in iSCSI session error recoveries

Increasing the iSCSI session error recovery level enables you to receive more detailed information about iSCSI error recoveries. Using a higher error recovery level might cause a minor reduction in iSCSI session performance.

### About this task

By default, ONTAP is configured to use error recovery level 0 for iSCSI sessions. If you are using an initiator that has been qualified for error recovery level 1 or 2, you can choose to increase the error recovery level. The modified session error recovery level affects only the newly created sessions and does not affect existing sessions.

Beginning with ONTAP 9.4, the `max-error-recovery-level` option is not supported in the `iscsi show` and `iscsi modify` commands.

### Steps

1. Enter advanced mode:

```
set -privilege advanced
```

2. Verify the current setting by using the `iscsi show` command.

```
iscsi show -vserver vs3 -fields max-error-recovery-level
```

```
vserver max-error-recovery-level
-----
vs3      0
```

3. Change the error recovery level by using the `iscsi modify` command.

```
iscsi modify -vserver vs3 -max-error-recovery-level 2
```

## Register the SVM with an iSNS server

You can use the `vserver iscsi isns` command to configure the storage virtual machine (SVM) to register with an iSNS server.

### About this task

The `vserver iscsi isns create` command configures the SVM to register with the iSNS server. The SVM does not provide commands that enable you to configure or manage the iSNS server. To manage the iSNS server, you can use the server administration tools or the interface provided by the vendor for the iSNS server.

### Steps

1. On your iSNS server, ensure that your iSNS service is up and available for service.

2. Create the SVM management LIF on a data port:

```
network interface create -vserver SVM_name -lif lif_name -role data -data  
-protocol none -home-node home_node_name -home-port home_port -address  
IP_address -netmask network_mask
```

3. Create an iSCSI service on your SVM if one does not already exist:

```
vserver iscsi create -vserver SVM_name
```

4. Verify that the iSCSI service was created successfully:

```
iscsi show -vserver SVM_name
```

5. Verify that a default route exists for the SVM:

```
network route show -vserver SVM_name
```

6. If a default route does not exist for the SVM, create a default route:

```
network route create -vserver SVM_name -destination destination -gateway  
gateway
```

7. Configure the SVM to register with the iSNS service:

```
vserver iscsi isns create -vserver SVM_name -address IP_address
```

Both IPv4 and IPv6 address families are supported. The address family of the iSNS server must be the same as that of the SVM management LIF.

For example, you cannot connect an SVM management LIF with an IPv4 address to an iSNS server with an IPv6 address.

8. Verify that the iSNS service is running:

```
vserver iscsi isns show -vserver SVM_name
```

9. If the iSNS service is not running, start it:

```
vserver iscsi isns start -vserver SVM_name
```

## Resolve iSCSI error messages on the storage system

There are a number of common iSCSI-related error messages that you can view with the `event log show` command. You need to know what these messages mean and what you can do to resolve the issues they identify.

The following table contains the most common error messages, and instructions for resolving them:

Message	Explanation	What to do
ISCSI: network interface identifier disabled for use; incoming connection discarded	The iSCSI service is not enabled on the interface.	<p>You can use the <code>iscsi interface enable</code> command to enable the iSCSI service on the interface. For example:</p> <pre>iscsi interface enable -vserver vs1 -lif lif1</pre>
ISCSI: Authentication failed for initiator nodename	CHAP is not configured correctly for the specified initiator.	<p>You should check the CHAP settings; you cannot use the same user name and password for inbound and outbound settings on the storage system:</p> <ul style="list-style-type: none"> <li>• Inbound credentials on the storage system must match outbound credentials on the initiator.</li> <li>• Outbound credentials on the storage system must match inbound credentials on the initiator.</li> </ul>

## iSCSI LIF failover for ASA platforms

Beginning with ONTAP 9.11.1 on All SAN Array (ASA) platforms, the iSCSI LIF failover feature supports automatic and manual migration of iSCSI LIFs in an SFO partner failover (when an iSCSI LIF moves from its home node/port to its HA partner node/port and back again) and in a local failover (when an iSCSI LIF moves from its unhealthy port to a healthy port on its current home node and back again). This feature provides faster I/O resumption for SAN workloads running on iSCSI.

### About enabling iSCSI LIF failover

You should familiarize yourself with aspects of when iSCSI LIF failover is automatically enabled and when you must manually enable it, including how newly created iSCSI LIFs and existing iSCSI LIFs are affected.

- The automatic migration of an iSCSI LIF is a LIF failover and auto-revert, which is triggered in certain events, such as planned or unplanned failover, a physical ethernet link down, or a node dropping out of replicated database (RDB) quorum.
  - After upgrading your ASA HA pair to ONTAP 9.11.1, this feature is automatically enabled on newly created iSCSI LIFs if no iSCSI LIFs exist in the specified storage VM or if all existing iSCSI LIFs in the specified storage VM are already enabled with iSCSI LIF failover.
  - For iSCSI LIFs created prior to upgrading to ONTAP 9.11.1, to use the iSCSI LIF failover feature, you must enable it using the ONTAP CLI. (Enabling the failover feature and auto-revert capability means changing the failover policy to `sfo-partner-only` and designating the auto-revert value to `true`.)

[Manage iSCSI LIFs using the ONTAP CLI](#)

If you do not enable iSCSI LIF failover on the existing iSCSI LIFs, when there is a failover event, the iSCSI LIFs will not failover.

Additionally, if after upgrading to ONTAP 9.11.1 or later you have existing iSCSI LIFs in a storage VM that have not been enabled with the iSCSI LIF failover feature and you create new iSCSI LIFs in the same storage VM, the new iSCSI LIFs assume the same failover policy (`disabled`) of the existing iSCSI LIFs in the storage VM.

- The manual migration of an iSCSI LIF is a LIF migrate and revert, which is initiated by the cluster admin using the ONTAP CLI or System Manager.

### Migrate and revert an iSCSI LIF

You manually migrate and revert an iSCSI LIF under the following circumstances:

- When scheduled maintenance or replacement is needed.
- When you have a pre-existing iSCSI LIF, meaning that the iSCSI LIF was created before you upgraded your HA pair to ONTAP 9.11.1 or later, and you have not enabled the iSCSI LIF failover feature on the LIF.

### How iSCSI LIF failover works

For LIFs with iSCSI LIF failover enabled (either automatically or manually), the following applies.

- For LIFs using the `data-iscsi` service policy, the failover-policy is restricted to `sfo-partner-only`, `local-only`, and `disabled`.
- iSCSI LIFs can failover only to the HA partner when their failover policy is set to `sfo-partner-only`.
- Auto-revert of LIFs happens when the `auto-revert` is set to `true` and when the LIF's home port is healthy and able to host the LIF.
- On a planned or unplanned node takeover, the iSCSI LIF on the node which is taken-over fails over to the HA partner. The port on which the LIF fails over is determined by VIF Manager.
- Once the failover is complete, the iSCSI LIF operates normally.
- When a giveback is initiated, the iSCSI LIF reverts back to its home node and port, if `auto-revert` is set to `true`.
- When an ethernet link goes down on a port hosting one or more iSCSI LIFs, VIF Manager migrates the LIFs from the down port to a different port in the same broadcast domain. The new port could be in the same node or its HA partner. Once the link is restored and if `auto-revert` is set to `true`, VIF Manager reverts the iSCSI LIFs back to their home node and home port.
- When a node drops out of replicated database (RDB) quorum, VIF Manager migrates the iSCSI LIFs from the out of quorum node to its HA partner. Once the node comes back into quorum and if `auto-revert` is set to `true`, VIF Manager reverts the iSCSI LIFs back to their home node and home port.

### Migrate and revert an iSCSI LIF

You can use System Manager or the ONTAP CLI to manually migrate an iSCSI LIF to a different port on the same node or to a different port on the HA partner, and then revert the LIF back to its home node and home port.

**Migrate and revert an iSCSI LIF using System Manager**


You can use System Manager to manually migrate and revert one or more iSCSI LIFs (network interfaces) to another port on the same node or to a port on the HA partner.

**Before you begin**

You must have an ASA platform HA pair and it must be running ONTAP 9.11.1 or later.

**Migrate a LIF**

**Steps**

- 1. In System Manager, click **Network > Overview > Network Interfaces**
- 2. Select the LIF you want to migrate, click , and then click **Migrate**.
- 3. In the **Migrate Interface** dialog box, select the destination node and port of the HA partner.



You have the option of permanently migrating the iSCSI LIF by checking the checkbox. Understand that the iSCSI LIF must be offline before it is permanently migrated. Additionally, once an iSCSI LIF is permanently migrated, it cannot be undone. There is no revert option.

- 4. Click **Migrate**.

**Revert a LIF**

**Steps**

- 1. In System Manager, click **Network > Overview > Network Interfaces**.
- 2. Select the LIF you want to revert, click  and then click **Revert Network Interface**.
- 3. In the **Revert Network Interface** dialog box, click **Revert**.

**Migrate and revert an iSCSI LIF using the ONTAP CLI**

You can use the ONTAP CLI to manually migrate and revert one or more iSCSI LIFs to another port on the same node or to a port on the HA partner.

**Before you begin**

You must have an ASA platform HA pair and it must be running ONTAP 9.11.1 or later.

If you want to...	Use this command...
Migrate an iSCSI LIF to another node/port	See <a href="#">Migrate a LIF</a> for the available commands.
Revert an iSCSI LIF back to its home node/port	See <a href="#">Revert a LIF to its home port</a> for the available commands.

**Manage iSCSI LIFs using the ONTAP CLI**

You can use the ONTAP CLI to manage iSCSI LIFs, including creating new iSCSI LIFs and enabling the iSCSI LIF failover feature for pre-existing LIFs.

**Before you Begin**

You must have an ASA platform HA pair and it must be running ONTAP 9.11.1 or later.

**About this task**

See the [ONTAP Command Reference](#) for a full list of network interface commands.

If you want to...	Use this command...
Create an iSCSI LIF	<pre>network interface create -vserver SVM_name -lif iscsi_lif -service-policy default-data-blocks -data-protocol iscsi -home-node node_name -home-port port_name -address IP_address -netmask netmask_value</pre> <p>If needed, see <a href="#">Create a LIF</a> for more information.</p>
Verify that the LIF was created successfully	<pre>network interface show -vserver SVM_name -fields failover-policy,failover- group,auto-revert,is-home</pre>
Verify if you can override the auto-revert default on iSCSI LIFs	<pre>network interface modify -vserver SVM_name -lif iscsi_lif -auto-revert false</pre>
Perform a storage failover on an iSCSI LIF	<pre>storage failover takeover -ofnode node_name -option normal</pre> <p>You receive a warning: A takeover will be initiated. Once the partner node reboots, a giveback will be automatically initiated. Do you want to continue? {y/n}:</p> <p>A y response displays a takeover message from its HA partner.</p>
Enable iSCSI LIF failover feature for pre-existing LIFs	<p>For iSCSI LIFs created before you upgraded your cluster to ONTAP 9.11.1 or later, you can enable the iSCSI LIF failover feature (by modifying the failover policy to <code>sfo-partner-only</code> and by modifying the auto-revert capability to <code>true</code>):</p> <pre>network interface modify -vserver SVM_name -lif iscsi_lif -failover-policy sfo-partner-only -auto-revert true</pre> <p>This command can be run on all the iSCSI LIFs in a Storage VM by specifying “-lif*” and keeping all other parameters the same.</p>

Disable iSCSI LIF failover feature for pre-existing LIFs	<p>For iSCSI LIFs created before you upgraded your cluster to ONTAP 9.11.1 or later, you can disable the iSCSI LIF failover feature and the auto-revert capability:</p> <pre>network interface modify -vserver SVM_name -lif iscsi_lif -failover-policy disabled -auto-revert false</pre> <p>This command can be run on all the iSCSI LIFs in a storage VM by specifying “-lif*” and keeping all other parameters the same.</p>
--	---

## Manage FC protocol

### Configure an SVM for FC

To configure a storage virtual machine (SVM) for FC, you must create LIFs for the SVM and assign the FC protocol to those LIFs.

#### Before you begin

You must have an FC license and it must be enabled. If the FC license is not enabled, the LIFs and SVMs appear to be online but the operational status is `down`. The FC service must be enabled for your LIFs and SVMs to be operational. You must use single initiator zoning for all of the FC LIFs in the SVM to host the initiators.

#### About this task

NetApp supports a minimum of one FC LIF per node for each SVM serving data with the FC protocol. You must use two LIFs per node and two fabrics, with one LIF per node attached. This provides for redundancy at the node layer and the fabric.



## Example 8. Steps

### System Manager

Configure an storage VM for iSCSI with ONTAP System Manager (9.7 and later).

To configure FC on a new storage VM	To configure FC on an existing storage VM
<ol style="list-style-type: none"><li>1. In System Manager, click <b>Storage &gt; Storage VMs</b> and then click <b>Add</b>.</li><li>2. Enter a name for the storage VM.</li><li>3. Select <b>FC</b> for the <b>Access Protocol</b>.</li><li>4. Click <b>Enable FC</b>. + The FC ports are automatically assigned.</li><li>5. Click <b>Save</b>.</li></ol>	<ol style="list-style-type: none"><li>1. In System Manager, click <b>Storage &gt; Storage VMs</b>.</li><li>2. Click on the storage VM you want to configure.</li><li>3. Click on the <b>Settings</b> tab, and then click  next to the FC protocol.</li><li>4. Click <b>Enable FC</b> and enter the IP address and subnet mask for the network interface. + The FC ports are automatically assigned.</li><li>5. Click <b>Save</b>.</li></ol>

### CLI

1. Enable FC service on the SVM:

```
vserver fcp create -vserver vserver_name -status-admin up
```

2. Create two LIFs for the SVMs on each node serving FC:

- For ONTAP 9.6 and later:

```
network interface create -vserver vserver_name -lif lif_name -data  
-protocol fcp -service-policy default-data-fcp -home-node node_name  
-home-port port_name -address ip_address -netmask netmask
```

- For ONTAP 9.5 and earlier:

```
network interface create -vserver vserver_name -lif lif_name -role data  
-data-protocol fcp -home-node node_name -home-port port
```

3. Verify that your LIFs have been created and that their operational status is online:

```
network interface show -vserver vserver_name lif_name
```

### Related information

[NetApp Support](#)

[NetApp Interoperability Matrix Tool](#)

[Considerations for LIFs in cluster SAN environments](#)

## Delete an FC service for an SVM

You can delete an FC service for a storage virtual machine (SVM) if it is no longer

required.

### What you'll need

The administration status must be “down” before you can delete a FC service for an SVM. You can set the administration status to down with either the `vserver fcp modify` command or the `vserver fcp stop` command.

### Steps

1. Use the `vserver fcp stop` command to stop the I/O to the LUN.

```
vserver fcp stop -vserver vs_1
```

2. Use the `vserver fcp delete` command to remove the service from the SVM.

```
vserver fcp delete -vserver vs_1
```

3. Use the `vserver fcp show` to verify that you deleted the FC service from your SVM:

```
vserver fcp show -vserver vs_1
```

## Recommended MTU configurations for FCoE jumbo frames

For Fibre Channel over Ethernet (FCoE), jumbo frames for the Ethernet adapter portion of the CNA should be configured at 9000 MTU. Jumbo frames for the FCoE adapter portion of the CNA should be configured at greater than 1500 MTU. Only configure jumbo frames if the initiator, target, and all intervening switches support and are configured for jumbo frames.

## Manage NVMe protocol

### Start the NVMe service for an SVM

Before you can use the NVMe protocol on your storage virtual machine (SVM), you must start the NVMe service on the SVM.

#### Before you begin

NVMe must be allowed as a protocol on your system.

The following NVMe protocols are supported:

Protocol	Beginning with ...	Allowed by...
TCP	ONTAP 9.10.1	Default
FCP	ONTAP 9.4	Default

### Steps

1. Change the privilege setting to advanced:

```
set -privilege advanced
```

2. Verify that NVMe is allowed as a protocol:

```
vserver nvme show
```

3. Create the NVMe protocol service:

```
vserver nvme create
```

4. Start the NVMe protocol service on the SVM:

```
vserver nvme modify -status -admin up
```

## Delete NVMe service from an SVM

If needed, you can delete the NVMe service from your storage virtual machine (SVM).

### Steps

1. Change the privilege setting to advanced:

```
set -privilege advanced
```

2. Stop the NVMe service on the SVM:

```
vserver nvme modify -status -admin down
```

3. Delete the NVMe service:

```
vserver nvme delete
```

## Resize a namespace

Beginning with ONTAP 9.10.1, you can use the ONTAP CLI to increase or decrease the size of a NVMe namespace. You can use System Manager to increase the size of a NVMe namespace.

### Increase the size of a namespace

#### System Manager

1. Click **Storage > NVMe Namespaces**.
2. Hoover over the namespace you want to increase, click , and then click **Edit**.
3. Under **CAPACITY**, change the size of the namespace.

#### CLI

1. Enter the following command: `vserver nvme namespace modify -vserver SVM_name -path path -size new_size_of_namespace`

## Decrease the size of a namespace

You must use the ONTAP CLI to decrease the size of a NVMe namespace.

1. Change the privilege setting to advanced:

```
set -privilege advanced
```

2. Decrease the size of the namespace:

```
vserver nvme namespace modify -vserver SVM_name -path namespace_path -size  
new_size_of_namespace
```

## Convert a namespace into a LUN

Beginning with ONTAP 9.11.1, you can use the ONTAP CLI to in-place convert an existing NVMe namespace to a LUN.

### Before you start

- Specified NVMe namespace should not have any existing maps to a Subsystem.
- Namespace should not be part of a snapshot or on the destination side of SnapMirror relationship as a read-only namespace.
- Since NVMe namespaces are only supported with specific platforms and network cards, this feature only works with specific hardware.

### Steps

1. You enter the following command to convert an NVMe namespace to a LUN:

```
lun convert-from-namespace -vserver -namespace-path
```

## Set up secure authentication over NVMe/TCP

Beginning with ONTAP 9.12.1 secure, bidirectional and unidirectional authentication between an NVMe host and controller is supported over NVMe/TCP using the DH-HMAC-CHAP authentication protocol.

To set up secure authentication, each host or controller must be associated with a DH-HMAC-CHAP key which is a combination of the NQN of the NVMe host or controller and an authentication secret configured by the administrator. In order for an NVMe host or controller to authenticate its peer, it must know the key associated with the peer. SHA-256 is the the default hash function and 2048-bit is the default DH group.

### Steps

1. Add DH-HMAC-CHAP authentication to your NVMe subsystem:

```
vserver nvme subsystem host add -vserver svm_name -subsystem subsystem -host  
-nqn host_nqn -dhchap-host-secret authentication_host_secret -dhchap  
-controller-secret authentication_controller_secret -dhchap-hash-function  
{sha-256|sha-512} -dhchap-group {none|2048-bit|3072-bit|4096-bit|6144-  
bit|8192-bit}
```

2. Verify that the DH-HMAC CHAP authentication protocol is added to your host:

```
vserver nvme subsystem host show
```

```
[ -dhchap-hash-function {sha-256|sha-512} ] Authentication Hash
Function
[ -dhchap-group {none|2048-bit|3072-bit|4096-bit|6144-bit|8192-bit} ]
Authentication Diffie-
Hellman
Group
[ -dhchap-mode {none|unidirectional|bidirectional} ]
Authentication Mode
```

3. Verify that the DH-HMAC CHAP authentication was performed during NVMe controller creation:

```
vserver nvme subsystem controller show
```

```
[ -dhchap-hash-function {sha-256|sha-512} ] Authentication Hash
Function
[ -dhchap-group {none|2048-bit|3072-bit|4096-bit|6144-bit|8192-bit} ]
Authentication Diffie-
Hellman
Group
[ -dhchap-mode {none|unidirectional|bidirectional} ]
Authentication Mode
```

## Disable secure authentication over NVMe/TCP

If you are running the NVMe/TCP protocol and you have established secure authentication using DH-HMAC-CHAP, you can choose to disable it at any time.

However, if you are reverting from ONTAP 9.12.1 or later to ONTAP 9.12.0 or earlier you must disable secure authentication before you revert. If secure authentication using DH-HMAC-CHAP is not disabled, revert will fail.

### Steps

1. Remove the host from the subsystem to disable DH-HMAC-CHAP authentication:

```
vserver nvme subsystem host remove -vserver svm_name -subsystem subsystem
-host-nqn host_nqn
```

2. Verify that the DH-HMAC-CHAP authentication protocol is removed from the host:

```
vserver nvme subsystem host show
```

3. Add the host back to the subsystem without authentication:

```
vserver nvme subsystem host add -vserver svm_name -subsystem subsystem -host
```

## Manage systems with FC adapters

### Manage systems with FC adapters

Commands are available to manage onboard FC adapters and FC adapter cards. These commands can be used to configure the adapter mode, display adapter information, and change the speed.

Most storage systems have onboard FC adapters that can be configured as initiators or targets. You can also use FC adapter cards configured as initiators or targets. Initiators connect to back-end disk shelves, and possibly foreign storage arrays (FlexArray). Targets connect only to FC switches. Both the FC target HBA ports and the switch port speed should be set to the same value and should not be set to auto.

#### Related information

[SAN configuration](#)

### Commands for managing FC adapters

You can use FC commands to manage FC target adapters, FC initiator adapters, and onboard FC adapters for your storage controller. The same commands are used to manage FC adapters for the FC protocol and the FC-NVMe protocol.

FC initiator adapter commands work only at the node level. You must use the `run -node node_name` command before you can use the FC initiator adapter commands.

#### Commands for managing FC target adapters

If you want to...	Use this command...
Display FC adapter information on a node	<code>network fcp adapter show</code>
Modify FC target adapter parameters	<code>network fcp adapter modify</code>
Display FC protocol traffic information	<code>run -node <i>node_name</i> sysstat -f</code>
Display how long the FC protocol has been running	<code>run -node <i>node_name</i> uptime</code>
Display adapter configuration and status	<code>run -node <i>node_name</i> sysconfig -v <i>adapter</i></code>
Verify which expansion cards are installed and whether there are any configuration errors	<code>run -node <i>node_name</i> sysconfig -ac</code>
View a man page for a command	<code>man <i>command_name</i></code>

## Commands for managing FC initiator adapters

If you want to...	Use this command...
Display information for all initiators and their adapters in a node	<code>run -node <i>node_name</i> storage show adapter</code>
Display adapter configuration and status	<code>run -node <i>node_name</i> sysconfig -v <i>adapter</i></code>
Verify which expansion cards are installed and whether there are any configuration errors	<code>run -node <i>node_name</i> sysconfig -ac</code>

## Commands for managing onboard FC adapters

If you want to...	Use this command...
Display the status of the onboard FC ports	<code>run -node <i>node_name</i> system hardware unified-connect show</code>

## Configure FC adapters

Each onboard FC port can be individually configured as an initiator or a target. Ports on certain FC adapters can also be individually configured as either a target port or an initiator port, just like the onboard FC ports. A list of adapters that can be configured for target mode is available in the [NetApp Hardware Universe](#).

Target mode is used to connect the ports to FC initiators. Initiator mode is used to connect the ports to tape drives, tape libraries, or third-party storage with FlexArray Virtualization or Foreign LUN Import (FLI).

The same steps are used when configuring FC adapters for the FC protocol and the FC-NVMe protocol. However, only certain FC adapters support FC-NVMe. See the [NetApp Hardware Universe](#) for a list of adapters that support the FC-NVMe protocol.

### Configure FC adapters for target mode

#### Steps

1. Take the adapter offline:

```
node run -node node_name storage disable adapter adapter_name
```

If the adapter does not go offline, you can also remove the cable from the appropriate adapter port on the system.

2. Change the adapter from initiator to target:

```
system hardware unified-connect modify -t target -node node_name adapter adapter_name
```

3. Reboot the node hosting the adapter you changed.

4. Verify that the target port has the correct configuration:

```
network fcp adapter show -node node_name
```

5. Bring your adapter online:

```
network fcp adapter modify -node node_name -adapter adapter_port -state up
```

## Configure FC adapters for initiator mode

### What you'll need

- LIFs on the adapter must be removed from any port sets of which they are members.
- All LIF's from every storage virtual machine (SVM) using the physical port to be modified must be migrated or destroyed before changing the personality of the physical port from target to initiator.



NVMe/FC does support initiator mode.

### Steps

1. Remove all LIFs from the adapter:

```
network interface delete -vserver SVM_name -lif LIF_name,LIF_name
```

2. Take your adapter offline:

```
network fcp adapter modify -node node_name -adapter adapter_port -status-admin down
```

If the adapter does not go offline, you can also remove the cable from the appropriate adapter port on the system.

3. Change the adapter from target to initiator:

```
system hardware unified-connect modify -t initiator adapter_port
```

4. Reboot the node hosting the adapter you changed.
5. Verify that the FC ports are configured in the correct state for your configuration:

```
system hardware unified-connect show
```

6. Bring the adapter back online:

```
node run -node node_name storage enable adapter adapter_port
```

## View adapter settings

You can use specific commands to view information about your FC/UTA adapters.

### FC target adapter

#### Step



1. Use the `network fcp adapter show` command to display adapter information: `network fcp adapter show -instance -node node1 -adapter 0a`

The output displays system configuration information and adapter information for each slot that is used.

## Unified Target Adapter (UTA) X1143A-R6

### Steps

1. Boot your controller without the cables attached.
2. Run the `system hardware unified-connect show` command to see the port configuration and modules.
3. View the port information before configuring the CNA and ports.

## Change the UTA2 port from CNA mode to FC mode

You should change the UTA2 port from Converged Network Adapter (CNA) mode to Fibre Channel (FC) mode to support the FC initiator and FC target mode. You should change the personality from CNA mode to FC mode when you need to change the physical medium that connects the port to its network.

### Steps

1. Take the adapter offline:

```
network fcp adapter modify -node node_name -adapter adapter_name -status-admin down
```

2. Change the port mode:

```
ucadmin modify -node node_name -adapter adapter_name -mode fcp
```

3. Reboot the node, and then bring the adapter online:

```
network fcp adapter modify -node node_name -adapter adapter_name -status-admin up
```

4. Notify your admin or VIF manager to delete or remove the port, as applicable:

- If the port is used as a home port of a LIF, is a member of an interface group (ifgrp), or hosts VLANs, then an admin should do the following:
  - i. Move the LIFs, remove the port from the ifgrp, or delete the VLANs, respectively.
  - ii. Manually delete the port by running the `network port delete` command.

If the `network port delete` command fails, the admin should address the errors, and then run the command again.

- If the port is not used as the home port of a LIF, is not a member of an ifgrp, and does not host VLANs, then the VIF manager should remove the port from its records at the time of reboot.

If the VIF manager does not remove the port, then the admin must remove it manually after the reboot by using the `network port delete` command.

```
net-f8040-34::> network port show
```

```
Node: net-f8040-34-01
```

Port	IPspace	Broadcast	Domain	Link	MTU	Speed(Mbps) Admin/Oper	Health Status
...							
e0i	Default	Default		down	1500	auto/10	-
e0f	Default	Default		down	1500	auto/10	-
...							

```
net-f8040-34::> ucadmin show
```

Admin	Current	Current	Pending	Pending	
Node	Adapter	Mode	Type	Mode	Type
Status					
net-f8040-34-01	0e	cna	target	-	-
offline					
net-f8040-34-01	0f	cna	target	-	-
offline					
...					

```
net-f8040-34::> network interface create -vs net-f8040-34 -lif m
-role
node-mgmt-home-node net-f8040-34-01 -home-port e0e -address 10.1.1.1
-netmask 255.255.255.0
```

```
net-f8040-34::> network interface show -fields home-port, curr-port
```

vserver	lif	home-port	curr-port
Cluster net-f8040-34-01_clus1	e0a	e0a	
Cluster net-f8040-34-01_clus2	e0b	e0b	
Cluster net-f8040-34-01_clus3	e0c	e0c	
Cluster net-f8040-34-01_clus4	e0d	e0d	
net-f8040-34			
cluster_mgmt	e0M	e0M	
net-f8040-34			
m	e0e	e0i	
net-f8040-34			
net-f8040-34-01_mgmt1	e0M	e0M	

```
7 entries were displayed.
```

```
net-f8040-34::> ucadmin modify local 0e fc
```

```
Warning: Mode on adapter 0e and also adapter 0f will be changed to fc.
```

```
Do you want to continue? {y|n}: y
```

```
Any changes will take effect after rebooting the system. Use the "system node reboot" command to reboot.
```

```
net-f8040-34::> reboot local  
(system node reboot)
```

```
Warning: Are you sure you want to reboot node "net-f8040-34-01"?  
{y|n}: y
```

#### 5. Verify that you have the correct SFP+ installed:

```
network fcp adapter show -instance -node -adapter
```

For CNA, you should use a 10Gb Ethernet SFP. For FC, you should either use an 8 Gb SFP or a 16 Gb SFP, before changing the configuration on the node.

## Change the CNA/UTA2 target adapter optical modules

You should change the optical modules on the unified target adapter (CNA/UTA2) to support the personality mode you have selected for the adapter.

### Steps

1. Verify the current SFP+ used in the card. Then, replace the current SFP+ with the appropriate SFP+ for the preferred personality (FC or CNA).
2. Remove the current optical modules from the X1143A-R6 adapter.
3. Insert the correct modules for your preferred personality mode (FC or CNA) optics.
4. Verify that you have the correct SFP+ installed:

```
network fcp adapter show -instance -node -adapter
```

Supported SFP+ modules and Cisco-branded Copper (Twinax) cables are listed in the *Hardware Universe*.

### Related information

[NetApp Hardware Universe](#)

## Supported port configurations for X1143A-R6 adapters

The FC target mode is the default configuration for X1143A-R6 adapter ports. However, ports on this adapter can be configured as either 10-Gb Ethernet and FCoE ports or as 16-Gb FC ports.

When configured for Ethernet and FCoE, X1143A-R6 adapters support concurrent NIC and FCoE target traffic on the same 10-GBE port. When configured for FC, each two-port pair that shares the same ASIC can be individually configured for FC target or FC initiator mode. This means that a single X1143A-R6 adapter can support FC target mode on one two-port pair and FC initiator mode on another two-port pair.

#### Related information

[NetApp Hardware Universe](#)

[SAN configuration](#)

## Configure the ports

To configure the unified target adapter (X1143A-R6), you must configure the two adjacent ports on the same chip in the same personality mode.

#### Steps

1. Configure the ports as needed for Fibre Channel (FC) or Converged Network Adapter (CNA) using the `system node hardware unified-connect modify` command.
2. Attach the appropriate cables for FC or 10 Gb Ethernet.
3. Verify that you have the correct SFP+ installed:

```
network fcp adapter show -instance -node -adapter
```

For CNA, you should use a 10Gb Ethernet SFP. For FC, you should either use an 8 Gb SFP or a 16 Gb SFP, based on the FC fabric being connected to.

## Prevent loss of connectivity when using the X1133A-R6 adapter

You can prevent loss of connectivity during a port failure by configuring your system with redundant paths to separate X1133A-R6 HBAs.

The X1133A-R6 HBA is a 4-port, 16 Gb FC adapter consisting of two 2-port pairs. The X1133A-R6 adapter can be configured as target mode or initiator mode. Each 2-port pair is supported by a single ASIC (for example, Port 1 and Port 2 on ASIC 1 and Port 3 and Port 4 on ASIC 2). Both ports on a single ASIC must be configured to operate in the same mode, either target mode or initiator mode. If an error occurs with the ASIC supporting a pair, both ports in the pair go offline.

To prevent this loss of connectivity, you configure your system with redundant paths to separate X1133A-R6 HBAs, or with redundant paths to ports supported by different ASICs on the HBA.

## Manage LIFs for all SAN protocols

### Manage LIFs for all SAN protocols

LIFs are connected to the SAN hosts. They can be removed from port sets, moved to different nodes within a storage virtual machine (SVM), and deleted.

#### Related information

[Network management](#)

## Configure an NVMe LIF

Certain requirements must be met when configuring NVMe LIFs.

### What you'll need

NVMe must be supported by the FC adapter on which you create the LIF. Supported adapters are listed in the *Hardware Universe*.

[NetApp Hardware Universe](#)

### About this task

The following rules apply when creating an NVMe LIF:

- NVMe can be the only data protocol on data LIFs.
- You should configure one management LIF for every SVM that supports SAN.
- For ONTAP 9.5 and later:
  - You can only configure two NVMe LIFs per node on a maximum of four nodes.
  - You must configure an NVMe LIF on the node containing the namespace and on node's HA partner.
- For ONTAP 9.4 only:
  - NVMe LIFs and namespaces must be hosted on the same node.
  - Only one NVMe data LIF can be configured per SVM.

### Steps

1. Create the LIF:

```
network interface create -vserver <SVM_name> -lif <LIF_name> -role  
<LIF_role> -data-protocol {fc-nvme|nvme-tcp} -home-node <home_node>  
-home-port <home_port>
```



NVME/TCP is available beginning with ONTAP 9.10.1 and later.

2. Verify that the LIF was created:

```
network interface show -vserver <SVM_name>
```

After creation, NVMe/TCP LIFs listen for discovery on port 8009.

## What to know before moving a SAN LIF

You only need to perform a LIF movement if you are changing the contents of your cluster, for example, adding nodes to the cluster or deleting nodes from the cluster. If you perform a LIF movement, you do not have to re-zone your FC fabric or create new iSCSI sessions between the attached hosts of your cluster and the new target interface.

You cannot move a SAN LIF using the `network interface move` command. SAN LIF movement must be performed by taking the LIF offline, moving the LIF to a different home node or port, and then bringing it back online in its new location. Asymmetric Logical Unit Access (ALUA) provides redundant paths and automatic path selection as part of any ONTAP SAN solution. Therefore, there is no I/O interruption when the LIF is taken offline for the movement. The host simply retries and then moves I/O to another LIF.

Using LIF movement, you can nondisruptively do the following:

- Replace one HA pair of a cluster with an upgraded HA pair in a way that is transparent to hosts accessing LUN data
- Upgrade a target interface card
- Shift the resources of a storage virtual machine (SVM) from one set of nodes in a cluster to another set of nodes in the cluster

## Remove a SAN LIF from a port set

If the LIF you want to delete or move is in a port set, you must remove the LIF from the port set before you can delete or move the LIF.

### About this task

You need to do Step 1 in the following procedure only if one LIF is in the port set. You cannot remove the last LIF in a port set if the port set is bound to an initiator group. Otherwise, you can start with Step 2 if multiple LIFs are in the port set.

### Steps

1. If only one LIF is in the port set, use the `lun igroup unbind` command to unbind the port set from the initiator group.



When you unbind an initiator group from a port set, all of the initiators in the initiator group have access to all target LUNs mapped to the initiator group on all network interfaces.

```
cluster1::>lun igroup unbind -vserver vs1 -igroup ig1
```

2. Use the `lun portset remove` command to remove the LIF from the port set.

```
cluster1::> port set remove -vserver vs1 -portset ps1 -port-name lif1
```

## Move a SAN LIF

If a node needs to be taken offline, you can move a SAN LIF to preserve its configuration information, such as its WWPN, and avoid rezoning the switch fabric. Because a SAN LIF must be taken offline before it is moved, host traffic must rely on host multipathing software to provide nondisruptive access to the LUN. You can move SAN LIFs to any node in a cluster, but you cannot move the SAN LIFs between storage virtual machines (SVMs).

### What you'll need

If the LIF is a member of a port set, the LIF must have been removed from the port set before the LIF can be moved to a different node.

### About this task

The destination node and physical port for a LIF that you want to move must be on the same FC fabric or Ethernet network. If you move a LIF to a different fabric that has not been properly zoned, or if you move a LIF to an Ethernet network that does not have connectivity between iSCSI initiator and target, the LUN will be inaccessible when you bring it back online.

### Steps

1. View the administrative and operational status of the LIF:

```
network interface show -vserver vservice_name
```

2. Change the status of the LIF to down (offline):

```
network interface modify -vserver vservice_name -lif LIF_name -status-admin  
down
```

3. Assign the LIF a new node and port:

```
network interface modify -vserver vservice_name -lif LIF_name -home-node  
node_name -home-port port_name
```

4. Change the status of the LIF to up (online):

```
network interface modify -vserver vservice_name -lif LIF_name -status-admin up
```

5. Verify your changes:

```
network interface show -vserver vservice_name
```

### Delete a LIF in a SAN environment

Before you delete a LIF, you should ensure that the host connected to the LIF can access the LUNs through another path.

#### What you'll need

If the LIF you want to delete is a member of a port set, you must first remove the LIF from the port set before you can delete the LIF.

## System Manager

Delete a LIF with ONTAP System Manager (9.7 and later).

### Steps

1. In System Manager, click **Network > Overview**, and then select **Network Interfaces**.
2. Select the storage VM from which you want to delete the LIF.
3. Click  and select **Delete**.

## CLI

Delete a LIF with the ONTAP CLI.

### Steps

1. Verify the name of the LIF and current port to be deleted:

```
network interface show -vserver vs1
```

2. Delete the LIF:

```
network interface delete
```

```
network interface delete -vserver vs1 -lif lif1
```

3. Verify that you deleted the LIF:

```
network interface show
```

```
network interface show -vserver vs1
```

Logical Status	Network	Current	Current Is
Vserver Interface	Admin/Oper	Address/Mask	Node Port
Home			
-----	-----	-----	-----
vs1			
lif2	up/up	192.168.2.72/24	node-01 e0b
true			
lif3	up/up	192.168.2.73/24	node-01 e0b
true			

## SAN LIF requirements for adding nodes to a cluster

You need to be aware of certain considerations when adding nodes to a cluster.

- You must create LIFs on the new nodes as appropriate before you create LUNs on those new nodes.
- You must discover those LIFs from the hosts as dictated by the host stack and protocol.



- You must create LIFs on the new nodes so that the LUN and volume movements are possible without using the cluster interconnect network.

## Configure iSCSI LIFs to return FQDN to host iSCSI SendTargets Discovery Operation

Beginning with ONTAP 9, iSCSI LIFs can be configured to return a Fully Qualified Domain Name (FQDN) when a host OS sends an iSCSI SendTargets Discovery Operation. Returning a FQDN is useful when there is a Network Address Translation (NAT) device between the host OS and the storage service.

### About this task

IP addresses on one side of the NAT device are meaningless on the other side, but FQDNs can have meaning on both sides.



The FQDN value interoperability limit is 128 characters on all host OS.

### Steps

1. Change the privilege setting to advanced:

```
set -privilege advanced
```

2. Configure iSCSI LIFs to return FQDN:

```
vserver iscsi interface modify -vserver SVM_name -lif iscsi_LIF_name  
-sendtargets_fqdn FQDN
```

In the following example, the iSCSI LIFs are configured to return storagehost-005.example.com as the FQDN.

```
vserver iscsi interface modify -vserver vs1 -lif vs1_iscsi1 -sendtargets-fqdn  
storagehost-005.example.com
```

3. Verify that sendtargets is the FQDN:

```
vserver iscsi interface show -vserver SVM_name -fields sendtargets-fqdn
```

In this example, storagehost-005.example.com is displayed in the sendtargets-fqdn output field.

```
cluster::vserver*> vserver iscsi interface show -vserver vs1 -fields  
sendtargets-fqdn  
vserver lif          sendtargets-fqdn  
-----  
vs1      vs1_iscsi1  storagehost-005.example.com  
vs1      vs1_iscsi2  storagehost-006.example.com
```

### Related information

[ONTAP 9 Commands](#)

# Recommended volume and file or LUN configuration combinations

## Recommended volume and file or LUN configuration combinations overview

There are specific combinations of FlexVol volume and file or LUN configurations you can use, depending on your application and administration requirements. Understanding the benefits and costs of these combinations can help you determine the right volume and LUN configuration combination for your environment.

The following volume and LUN configuration combinations are recommended:

- Space-reserved files or LUNs with thick volume provisioning
- Non-space-reserved files or LUNs with thin volume provisioning
- Space-reserved files or LUNs with semi-thick volume provisioning

You can use SCSI thin provisioning on your LUNs in conjunction with any of these configuration combinations.

### Space-reserved files or LUNs with thick volume provisioning

#### Benefits:

- All write operations within space-reserved files are guaranteed; they will not fail due to insufficient space.
- There are no restrictions on storage efficiency and data protection technologies on the volume.

#### Costs and limitations:

- Enough space must be set aside from the aggregate up front to support the thickly provisioned volume.
- Space equal to twice the size of the LUN is allocated from the volume at LUN creation time.

### Non-space-reserved files or LUNs with thin volume provisioning

#### Benefits:

- There are no restrictions on storage efficiency and data protection technologies on the volume.
- Space is allocated only as it is used.

#### Costs and restrictions:

- Write operations are not guaranteed; they can fail if the volume runs out of free space.
- You must manage the free space in the aggregate effectively to prevent the aggregate from running out of free space.

### Space-reserved files or LUNs with semi-thick volume provisioning

#### Benefits:

Less space is reserved up front than for thick volume provisioning, and a best-effort write guarantee is still provided.

## Costs and restrictions:

- Write operations can fail with this option.

You can mitigate this risk by properly balancing free space in the volume against data volatility.

- You cannot rely on retention of data protection objects such as Snapshot copies and FlexClone files and LUNs.
- You cannot use ONTAP block-sharing storage efficiency capabilities that cannot be automatically deleted, including deduplication, compression, and ODX/Copy Offload.

## Determine the correct volume and LUN configuration combination for your environment

Answering a few basic questions about your environment can help you determine the best FlexVol volume and LUN configuration for your environment.

### About this task

You can optimize your LUN and volume configurations for maximum storage utilization or for the security of write guarantees. Based on your requirements for storage utilization and your ability to monitor and replenish free space quickly, you must determine the FlexVol volume and LUN volumes appropriate for your installation.



You do not need a separate volume for each LUN.

### Step

1. Use the following decision tree to determine the best volume and LUN configuration combination for your environment:



## Calculate rate of data growth for LUNs

You need to know the rate at which your LUN data is growing over time to determine whether you should use space-reserved LUNs or non-space-reserved LUNs.

### About this task

If you have a consistently high rate of data growth, then space-reserved LUNs might be a better option for you. If you have a low rate of data growth, then you should consider non-space-reserved LUNs.

You can use tools such as OnCommand Insight to calculate your rate of data growth or you can calculate it manually. The following steps are for manual calculation.

### Steps

1. Set up a space-reserved LUN.
2. Monitor the data on the LUN for a set period of time, such as one week.

Make sure that your monitoring period is long enough to form a representative sample of regularly occurring increases in data growth. For instance, you might consistently have a large amount of data growth at the end of each month.

3. Each day, record in GB how much your data grows.
4. At the end of your monitoring period, add the totals for each day together, and then divide by the number of days in your monitoring period.

This calculation yields your average rate of growth.

### Example

In this example, you need a 200 GB LUN. You decide to monitor the LUN for a week and record the following daily data changes:

- Sunday: 20 GB
- Monday: 18 GB
- Tuesday: 17 GB
- Wednesday: 20 GB
- Thursday: 20 GB
- Friday: 23 GB
- Saturday: 22 GB

In this example, your rate of growth is  $(20+18+17+20+20+23+22) / 7 = 20$  GB per day.

## Configuration settings for space-reserved files or LUNs with thick-provisioned volumes

This FlexVol volume and file or LUN configuration combination provides the ability to use storage efficiency technologies and does not require you to actively monitor your free space, because sufficient space is allocated up front.

The following settings are required to configure a space-reserved file or LUN in a volume using thick provisioning:

Volume setting	Value
Guarantee	Volume
Fractional reserve	100
Snapshot reserve	Any
Snapshot autodelete	Optional
Autogrow	Optional; if enabled, aggregate free space must be actively monitored.

File or LUN setting	Value
Space reservation	Enabled

## Configuration settings for non-space-reserved files or LUNs with thin-provisioned volumes

This FlexVol volume and file or LUN configuration combination requires the smallest amount of storage to be allocated up front, but requires active free space management to prevent errors due to lack of space.

The following settings are required to configure a non-space-reserved files or LUN in a thin-provisioned volume:

Volume setting	Value
Guarantee	None
Fractional reserve	0
Snapshot reserve	Any
Snapshot autodelete	Optional
Autogrow	Optional

File or LUN setting	Value
Space reservation	Disabled

## Additional considerations

When the volume or aggregate runs out of space, write operations to the file or LUN can fail.

If you do not want to actively monitor free space for both the volume and the aggregate, you should enable Autogrow for the volume and set the maximum size for the volume to the size of the aggregate. In this configuration, you must monitor aggregate free space actively, but you do not need to monitor the free space in the volume.

## Configuration settings for space-reserved files or LUNs with semi-thick volume provisioning

This FlexVol volume and file or LUN configuration combination requires less storage to be allocated up front than the fully provisioned combination, but places restrictions on the efficiency technologies you can use for the volume. Overwrites are fulfilled on a best-effort basis for this configuration combination.

The following settings are required to configure a space-reserved LUN in a volume using semi-thick provisioning:

Volume setting	Value
Guarantee	Volume
Fractional reserve	0
Snapshot reserve	0
Snapshot autodelete	On, with a commitment level of destroy, a destroy list that includes all objects, the trigger set to volume, and all FlexClone LUNs and FlexClone files enabled for automatic deletion.
Autogrow	Optional; if enabled, aggregate free space must be actively monitored.

File or LUN setting	Value
Space reservation	Enabled

## Technology restrictions

You cannot use the following volume storage efficiency technologies for this configuration combination:

- Compression
- Deduplication
- ODX and FlexClone Copy Offload
- FlexClone LUNs and FlexClone files not marked for automatic deletion (active clones)
- FlexClone subfiles
- ODX/Copy Offload

## **Additional considerations**

The following facts must be considered when employing this configuration combination:

- When the volume that supports that LUN runs low on space, protection data (FlexClone LUNs and files, Snapshot copies) is destroyed.
- Write operations can time out and fail when the volume runs out of free space.

Compression is enabled by default for AFF platforms. You must explicitly disable compression for any volume for which you want to use semi-thick provisioning on an AFF platform.

## Copyright information

Copyright © 2023 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

## Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.