
M1 CONSOLE CARRIER — USB POWER ON PICO
Eight active-low controls. Separate key protection adapter required.
No external USB-C key connector or switched key supply on this PCB.

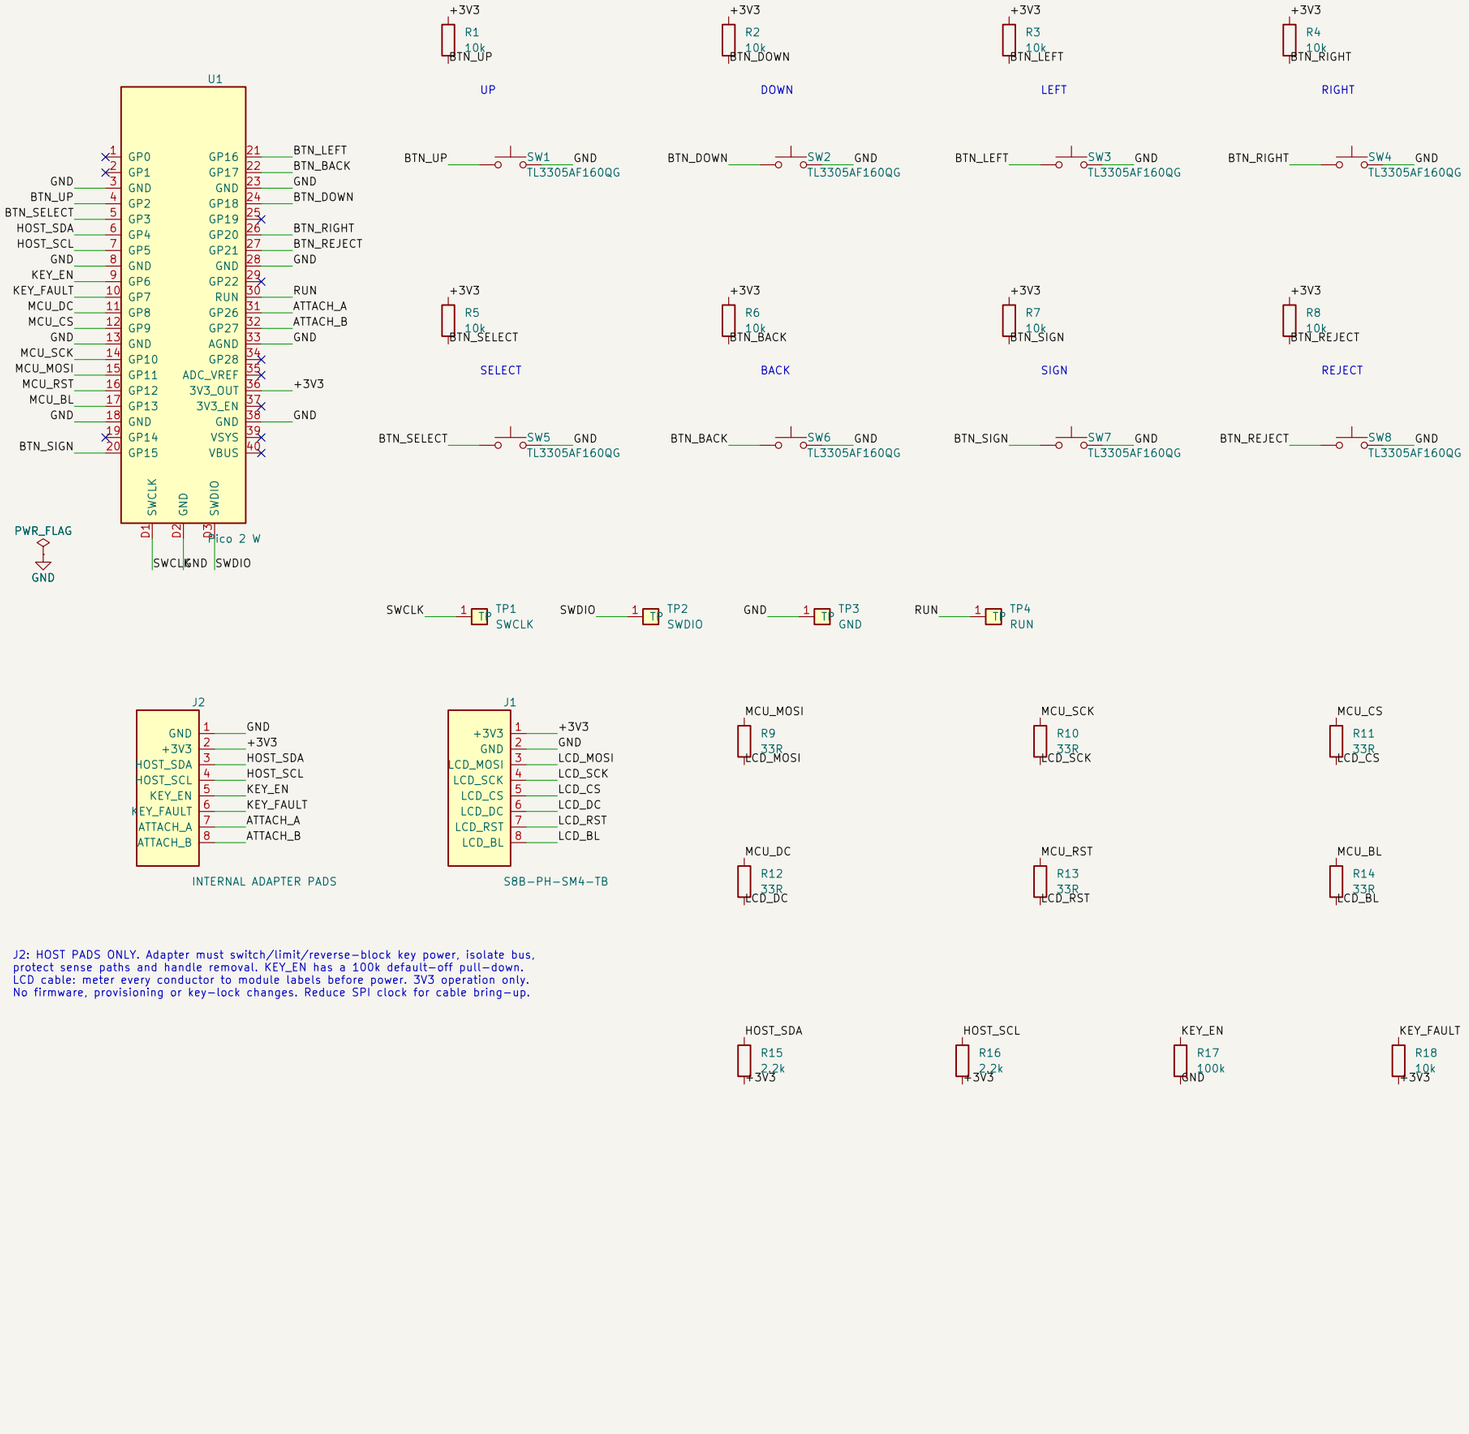

J2: HOST PADS ONLY. Adapter must switch/limit/reverse-block key power, isolate bus, protect sense paths and handle removal. KEY_EN has a 100k default-off pull-down. LCD cable: meter every conductor to module labels before power. 3V3 operation only. No firmware, provisioning or key-lock changes. Reduce SPI clock for cable bring-up.

Console carrier only; protected key adapter separate; see README.md

PicoQuorum

Sheet: /
File: m1.kicad_sch

Title: PicoQuorum M1 prototype console carrier

Size: A3	Date: 2026-10-07	**Rev: M1-draft**
KiCad E.D.A. 10.0.6		Id: 1/1