

Figure 4: Impact of frequency decomposition (a) and boundary continuation (b) across model variants, on Test MSE (left axis) and Boundary Continuity Error / SDE (right axis); lower is better for both. The full dual-band spectral architecture combined with single-step boundary continuation achieves the best forecasting accuracy and a smoother context-to-forecast interface.

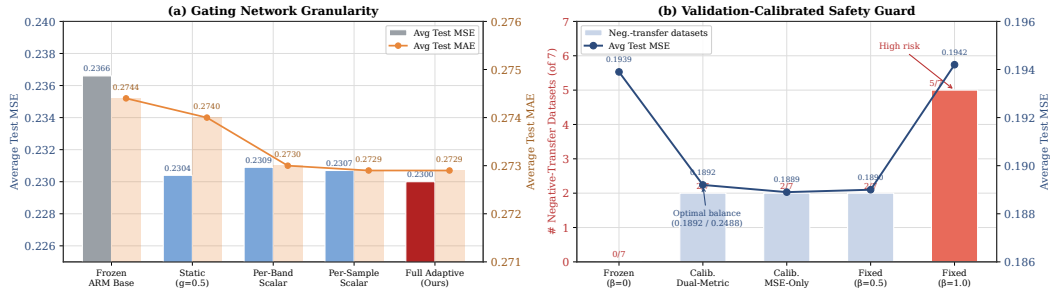


Figure 5: Gating network granularity (a) and validation safety-scale calibration (b). (a) Full adaptive per-timestep gating achieves the best joint MSE/MAE compared to coarser scalar variants and the frozen baseline. (b) Fixed uncalibrated injection ($\beta=1.0$) causes regressions on 5/7 datasets, whereas the validation-calibrated dual-metric guard mitigates negative transfer while preserving refinements.

4.5 ABLATION STUDIES

We systematically validate each component of DynaSpec-RAG through six focused ablations. Figures 4 and 5 summarize the key findings; full numeric tables are provided in Appendix B (Tables 4-9).

Ablation 1: Frequency Decomposition Isolation. We isolate sub-band splitting by comparing Full Dual-Band against Low-Only, High-Only, and Monolithic residuals. As shown in Figure 4(a) and Table 4, low-frequency macro trends carry most of the retrieval utility, bringing average MSE down from 0.2258 (ARM base) to 0.2205 (Low-Only), while the Full Dual-Band model achieves the lowest overall MSE of **0.2199** and the smoothest boundary handoff (SDE 0.1248).

Ablation 2: Boundary Continuation. We ablate the single-step boundary continuation operator (Figure 4(b), Table 5). Boundary-aligning the retrieved horizons lowers average Test MSE from 0.2457 (raw residual, no alignment) to 0.2433; disabling it forfeits most of the improvement over the TS-RAG base (0.2487). Boundary continuation also lets validation calibration trust analogues with larger scales (e.g., ETTh1 β : 0.275 $\rightarrow$ 0.525).

Ablation 3: Gating Network Granularity. Figure 5(a) and Table 6 show that fine-grained per-timestep temporal gating (Full Adaptive) achieves the lowest overall Test MSE (0.2300) and MAE (0.2729). It uniquely exhibits non-zero temporal gate variance (6.27×10^{-3}), demonstrating that per-timestep modulation dynamically restricts analogue injection during volatile transient steps; coarser scalar gates recover most of the MSE headroom but the temporal advantage manifests primarily on MAE.

Ablation 4: Validation-Calibrated Safety Scale (β). We evaluate D-Guard against uncalibrated fixed injections (Figure 5(b), Table 7). Uncalibrated injection ($\beta = 1.0$) causes severe negative transfer, regressing on 5/7 datasets and raising average Test MSE to 0.1942. Dual-metric validation