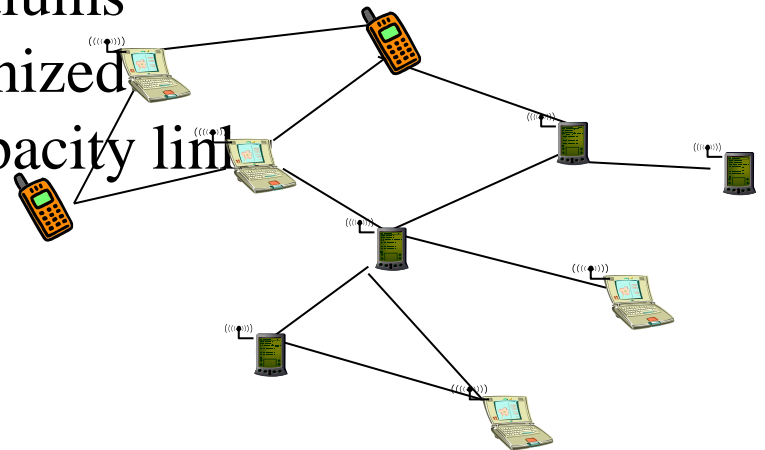# Ad-Hoc Networks

Mestrado em Engenharia de Computadores e Telemática

2022/2023

Mobile Ad-hoc networks

- Terminals may appear and disappear anywhere and anytime, and may freely move
- Nodes can act as routers or terminals
- Networks independently formed, can be merged and splitted anytime
- Dynamic topologies
- Coexistence of different access mediums
- Network is intelligent and self-organized
- Bandwidth constrained, variable capacity link
- Energy constrained operation
- Limited physical security

Challenges in Mobile Environments – Ad-hoc increases them

- Limitations of the wireless network
  - Lack of central entity for organization available
  - Limited range of wireless communication
  - Packet loss due to transmission errors
  - Variable capacity links
  - Frequent disconnections/partitions
  - Limited communication bandwidth
  - Broadcast nature of the communications
- Limitations imposed by mobility
  - Dynamically changing topologies/routes
  - Lack of mobility awareness by system/applications
- Limitations of the mobile computer
  - Short battery lifetime
  - Limited capacities

Build a wireless ad-hoc network

- Try to build a network without infrastructure, using networking abilities of the participants
  - This is an ad-hoc network – a network constructed "for a special purpose"

- Simplest example: Laptops in a conference room – a single-hop ad-hoc network
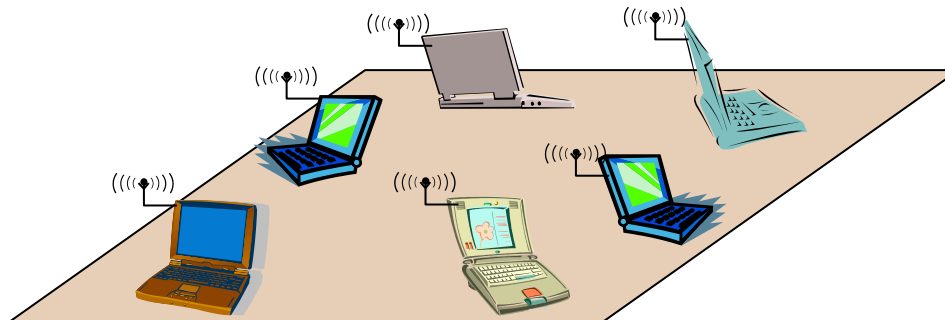
Application Scenarios

Ad-hoc applications

- Personal area networking
  - Cell phone, laptop, ear phone, wrist watch
- Military environments
  - Soldiers, tanks, planes
- Civilian environments
  - Taxi cab network
  - Meeting rooms
  - Sports stadiums
  - Boats, small aircraft
- Emergency operations
  - Search-and-rescue
  - Policing and fire fighting

Usage scenarios – in general

- Setting up of fixed access points and backbone infrastructure is not always viable
  - Infrastructure may not be present in a disaster area or war zone
  - Infrastructure may not be practical for short-range radios; Bluetooth (range ~ 10m)
- Ad-hoc networks
  - Do not need backbone infrastructure support
  - Are easy to deploy
  - Useful when infrastructure is absent, destroyed or impractical
- Or when the objective is to have
  - Self-adapting and self-sufficient networks
  - Networks with constant changes
  - Networks that require mobility
  - Moving networks
  - Requirement to absent any external configuration and management process

Civilian environments

- Computer science classroom
  - Ad-hoc network between student laptops
- Conference
  - Users in different rooms accessing services through other users
- Shopping mall, restaurant, coffee shops
  - Customers spend part of the day in a networked mall of speciality shops, coffee shops, and restaurants
- Large campus
  - Employees of a company moving within a large campus with laptops, and cellphones
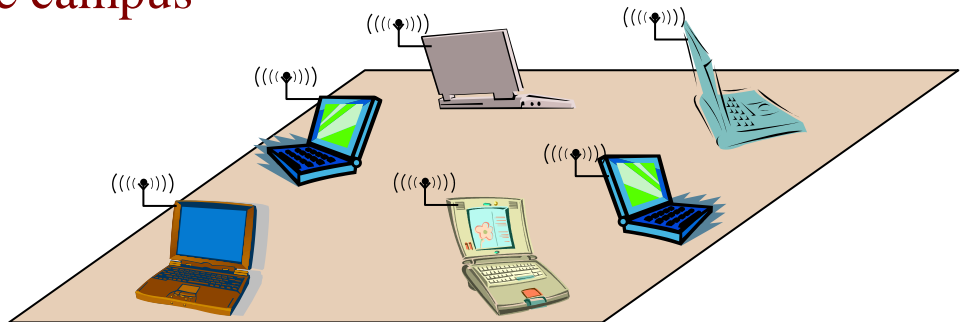
Civilian environments

- Traffic networks (smart cars and smart roads)
- Board systems talk with the road
  - Map delays and blocks
  - Obtain maps
  - Inform the road about its actions
- Finding out empty parking lots in a city, without asking a server
- Car-to-car communication
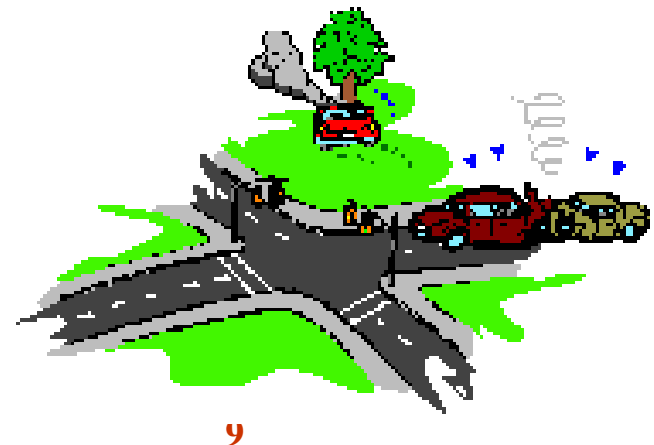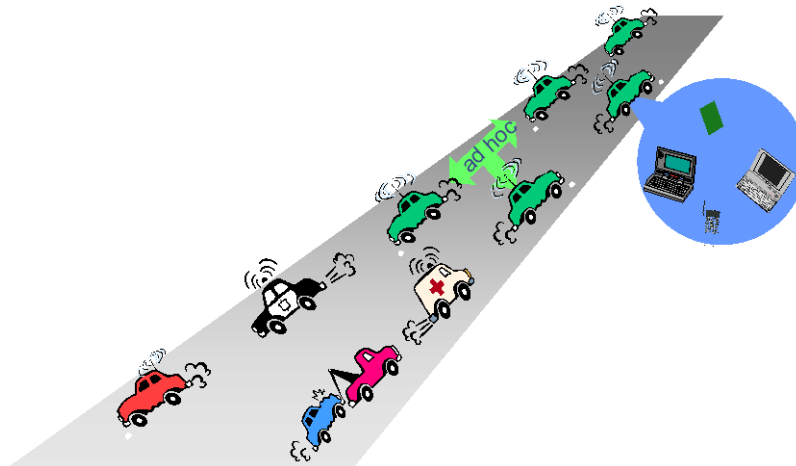
Military environments

- Combat regiment in the field
  - Around 4000-8000 objects in constant and umpredictable movement
- Force intercommunication
  - Proximity, function, battle plan
- Moving soldiers with wearable computers
  - Eavesdropping, denial-of-service and impersonation attacks can be launched
- Advantages
  - Low detection probability
  - Random topology and association between nodes
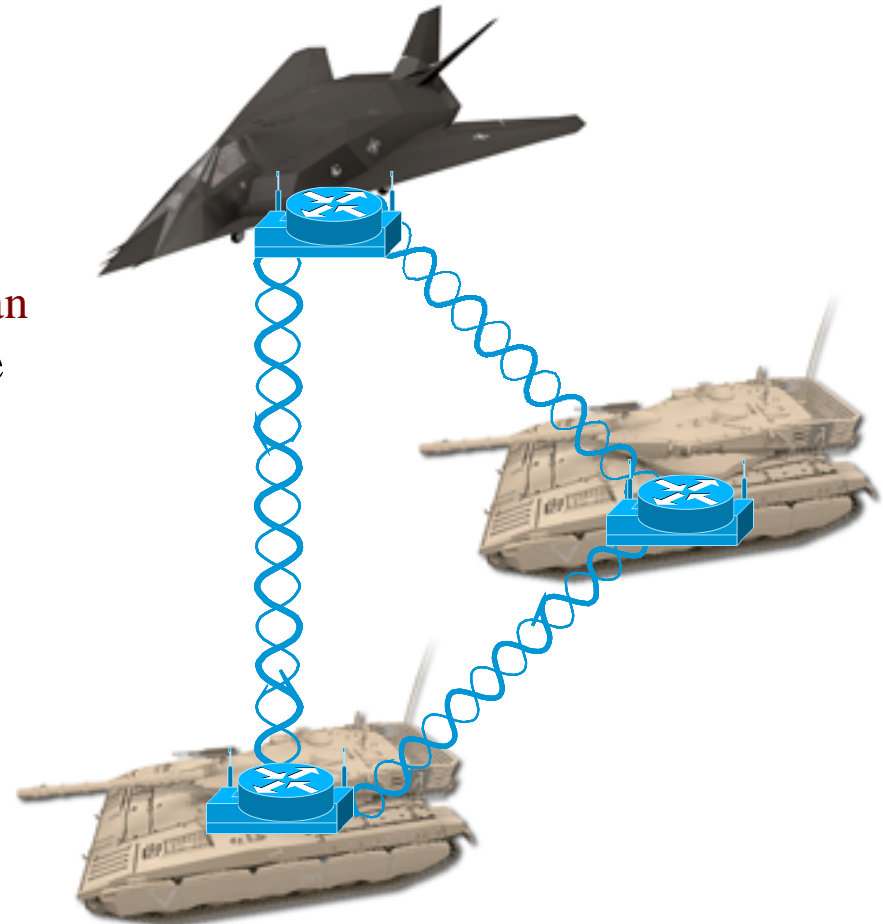
Others...

- **Disaster recovery**

- **Factory floor automation**
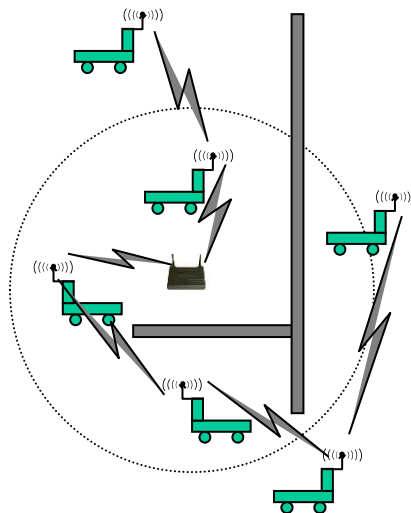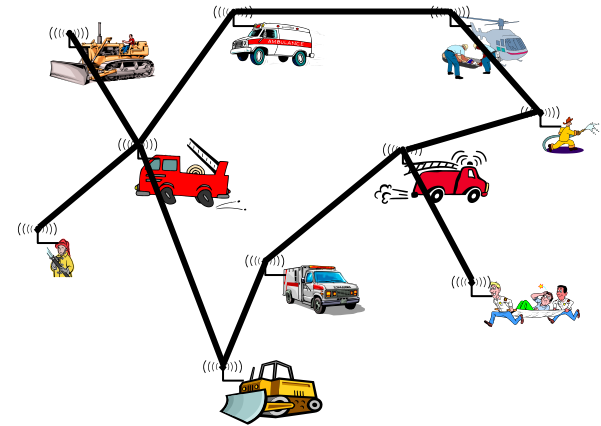
Routing

Routing: Challenges and Requirements

- Major challenges
  - Mobility – path breaks, packet collisions, transient loops
  - Bandwidth constraint – channel shared by all nodes in the broadcast region
  - Error-prone and shared channel – take into account the larger BERs in wireless ad-hoc
  - Location-dependent contention – high when the number of nodes increases
- Major requirements
  - Minimum route acquisition delay
  - Quick route reconfiguration (handle path breaks)
  - Loop-free routing (avoid waste of resources)
  - Distributed routing approach (reduce bandwitdth consumed)
  - Minimum control overhead (bandwidth, collisions)
  - Scalability (scale with large network – minimize control overhead)
  - Provisioning of QoS (provide QoS levels) - support for time-sensitive traffic
  - Security and privacy (resilient to threats and vulnerabilities)

Proactive and Reactive Protocols

- Proactive protocols
  - Always maintain routes
  - Little or no delay for route determination
  - Consume bandwidth to keep routes up-to-date
  - Maintain routes which may never be used
- Reactive protocols
  - Lower overhead since routes are determined on demand
  - Significant delay in route determination
  - Employ flooding (global search)
  - Control traffic may be bursty
- Which approach achieves a better trade-off depends on the traffic and mobility patterns

Reactive routing protocols

AODV - Ad Hoc On-Demand Distance Vector Routing

Ad Hoc On-Demand Distance Vector Routing (AODV)

- AODV maintains routing tables at the nodes, so that data packets do not have to contain routes

- Routes are maintained only between nodes which need to communicate

AODV operation

- Route Requests (RREQ)
- When a node re-broadcasts a Route Request, it sets up a reverse path pointing towards the source
  - AODV assumes symmetric (bi-directional) links
- When the destination receives a Route Request, it replies by sending a Route Reply (RREP)
- Route Reply travels along the reverse path set-up when Route Request is forwarded

```
 0                   1                   2                   3
 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
|   Type    |J|R|G|D|U|  Reserved     | Hop Count   |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
|                       RREQ ID                    |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
|               Destination IP Address          |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
|            Destination Sequence Number           |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
|              Originator IP Address            |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
|           Originator Sequence Number             |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-
```

AODV operation

- Each node maintains non-decreasing sequence numbers
  - Sent in RREQ, RREP messages; incremented with each new message
  - Used to "timestamp" routing table entries for "freshness" comparison
- Intermediate node may return RREP if it has routing table entry for destination which is "fresher" than source's (or equal with lower hop count)

- Routing table entries assigned "lifetime", deleted on expiration
- Unique ID included in RREQ for duplicate rejection

Route Requests in AODV
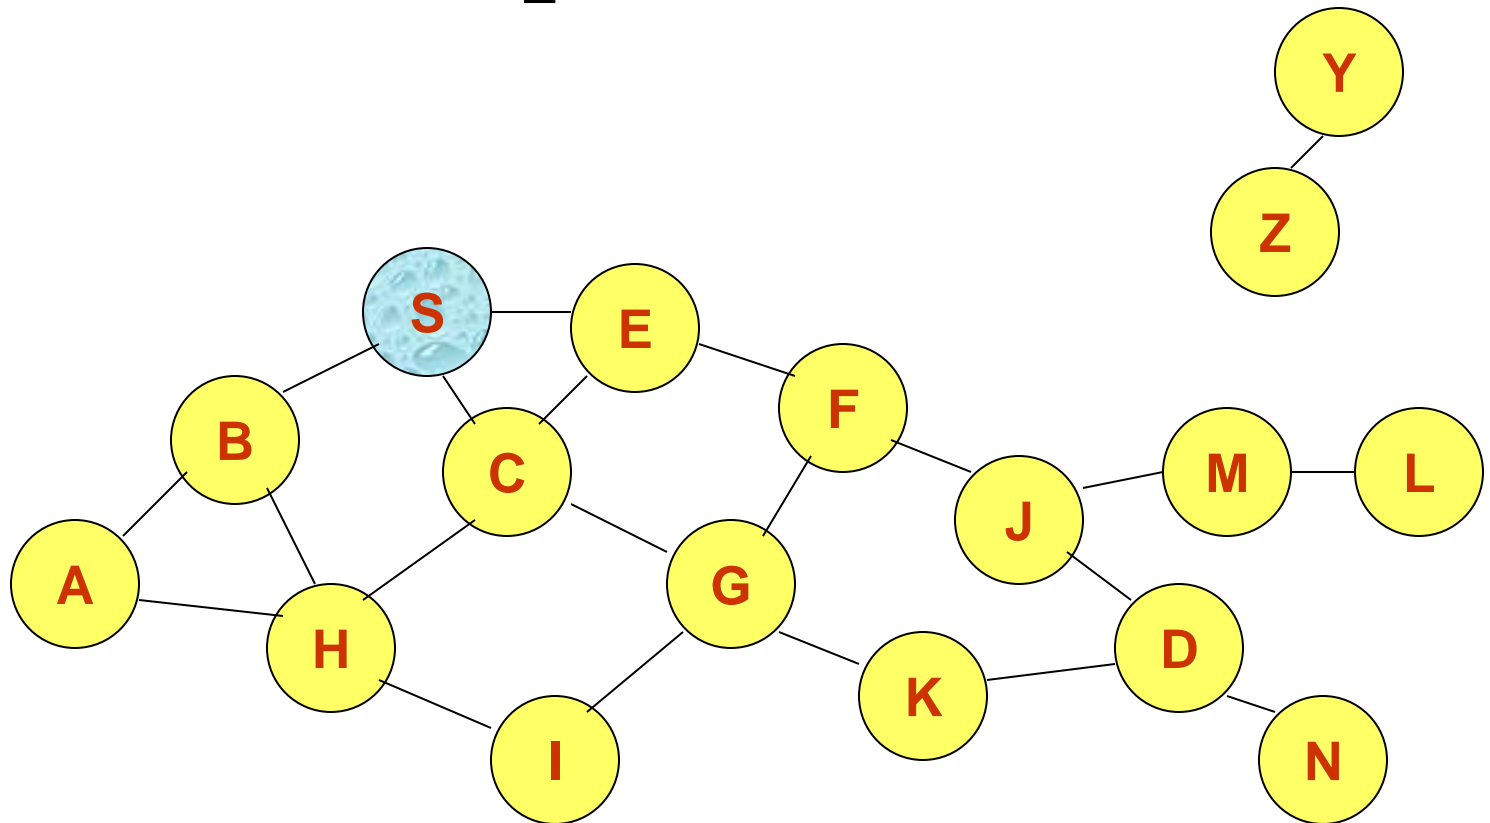
Represents a node that has received RREQ for D from S

Route Requests in AODV

Broadcast transmission

Y

Z

S

E

B

C

F

M

L

J

A

G

H

D

I

K

N
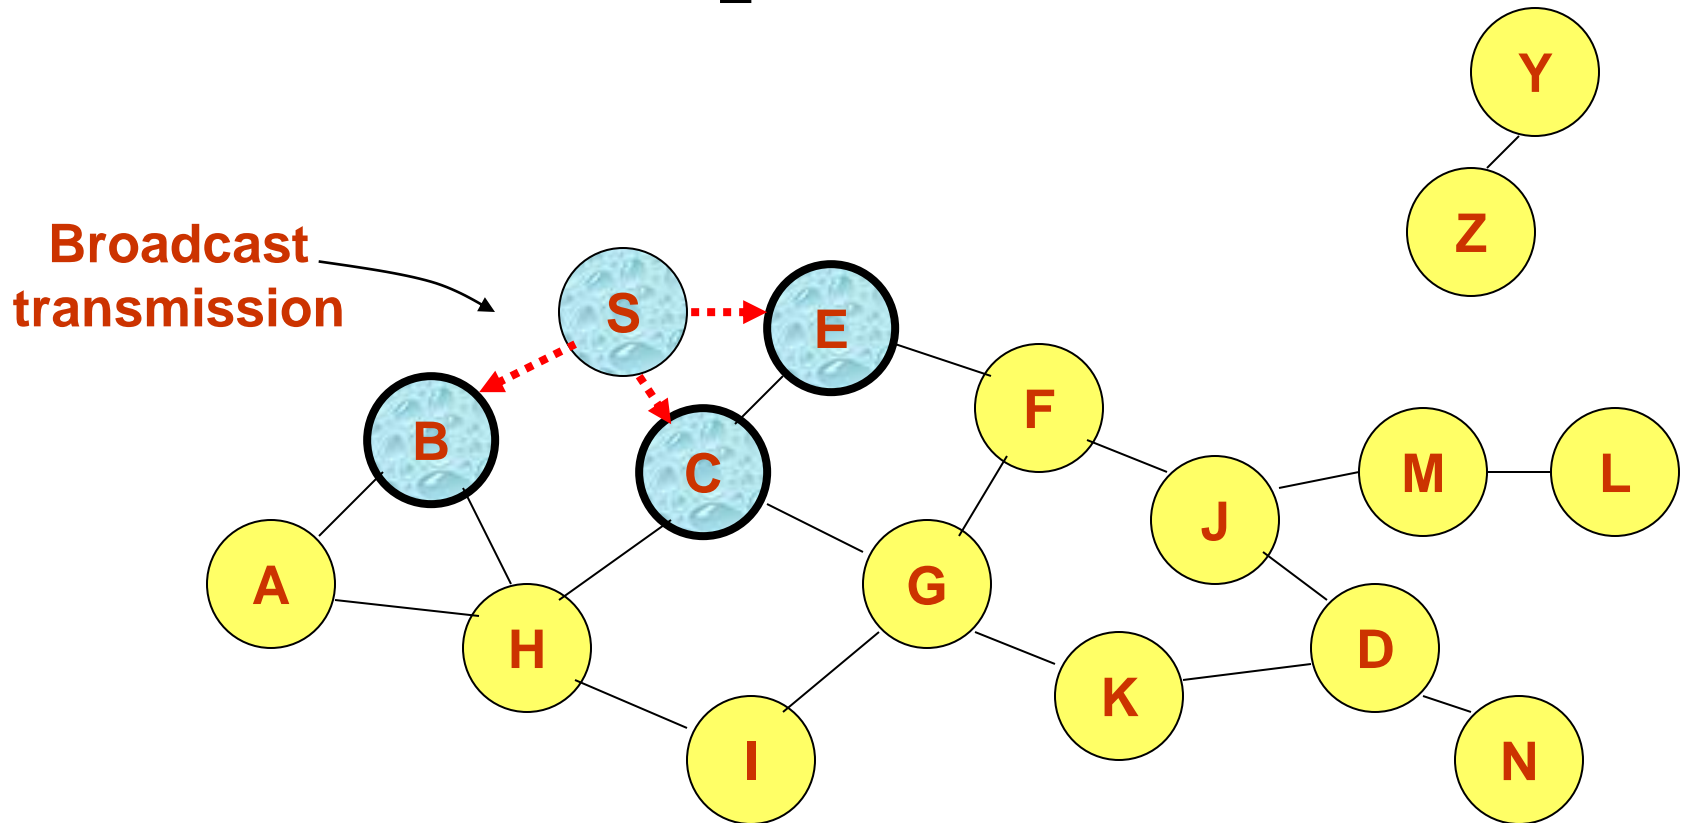
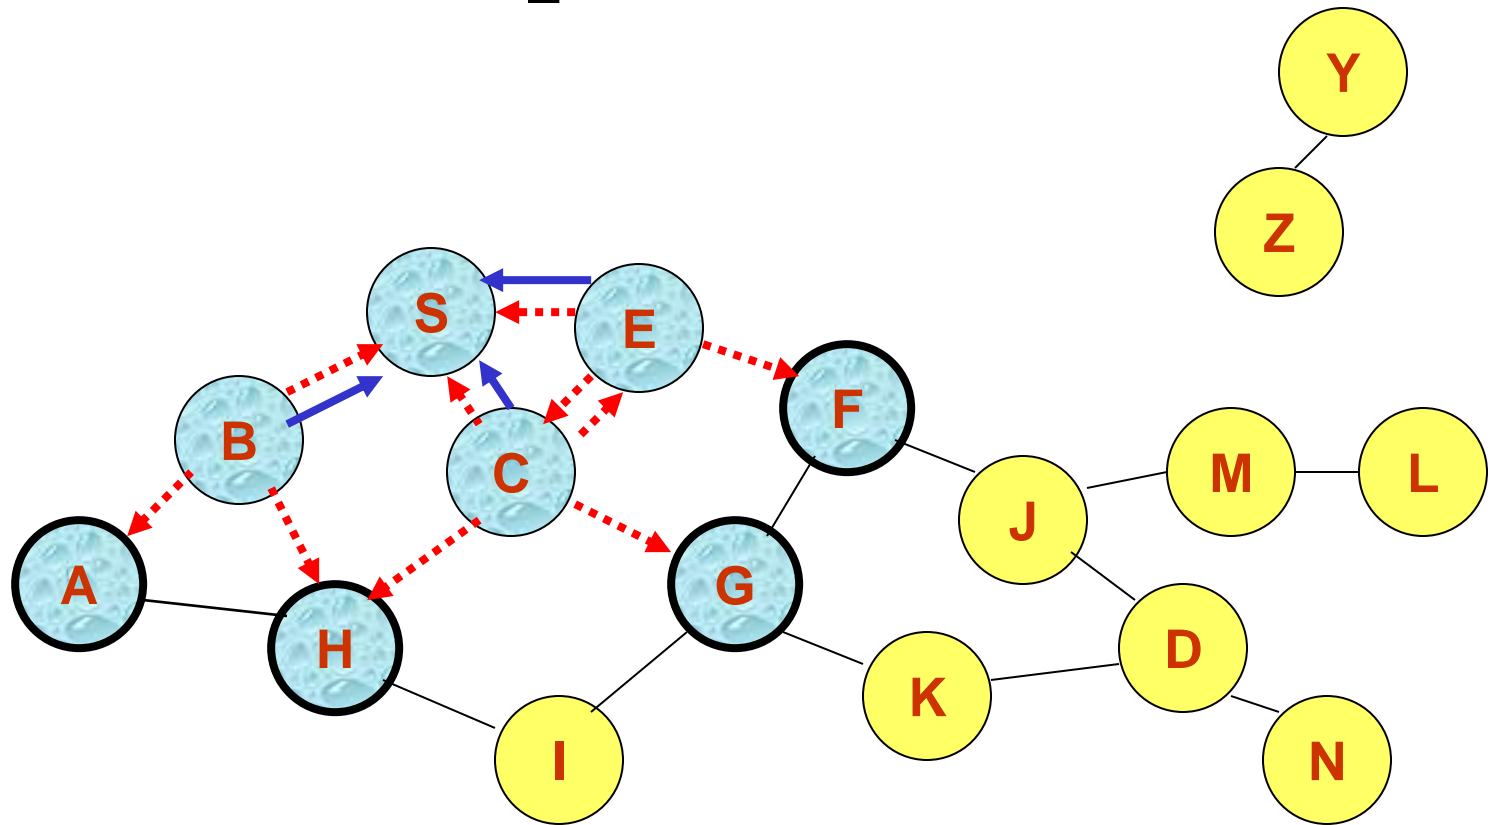- - - - - ▶ **Represents transmission of RREQ**

Node E receives RREQ
Makes reverse route entry for S
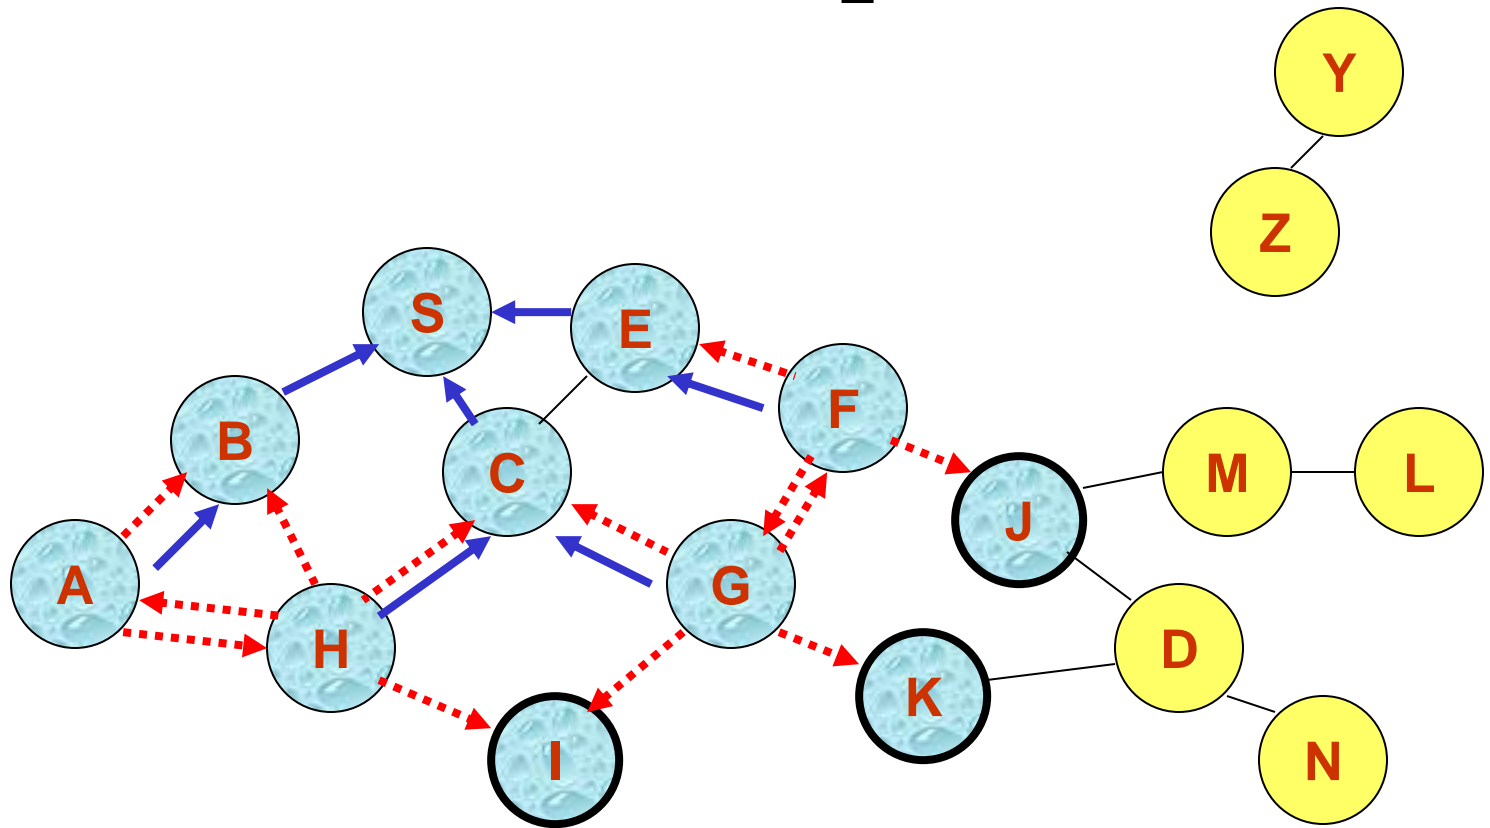dest = S, next hop = S, hop cnt = 1
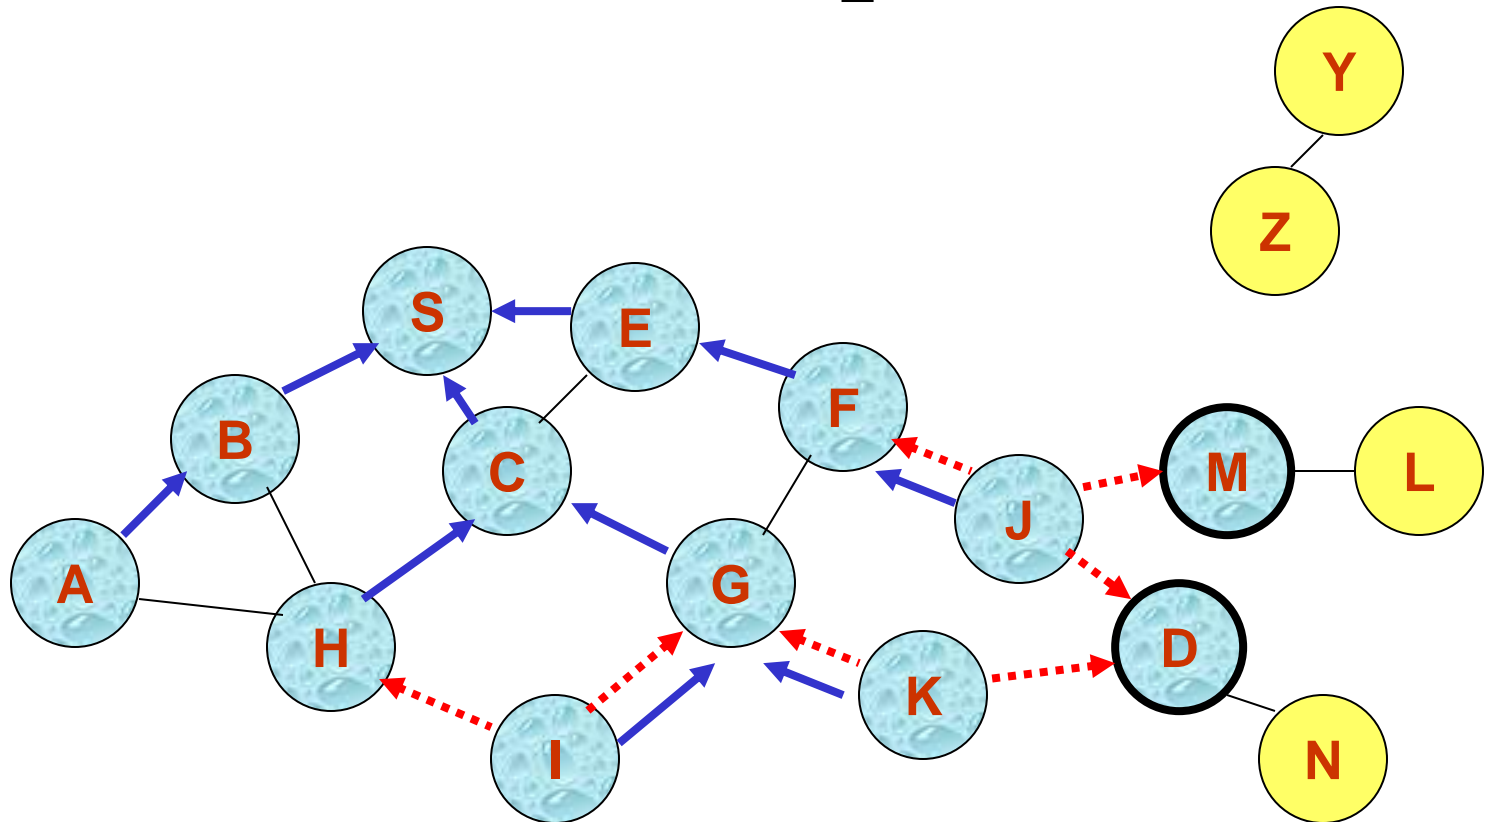It has no route to D, so it rebroadcasts RREQ

Route Requests in AODV

Represents links on Reverse Path

Reverse Path Setup in AODV

- **Node C receives RREQ from G and H, but does not forward it again, because node C has already forwarded RREQ once**

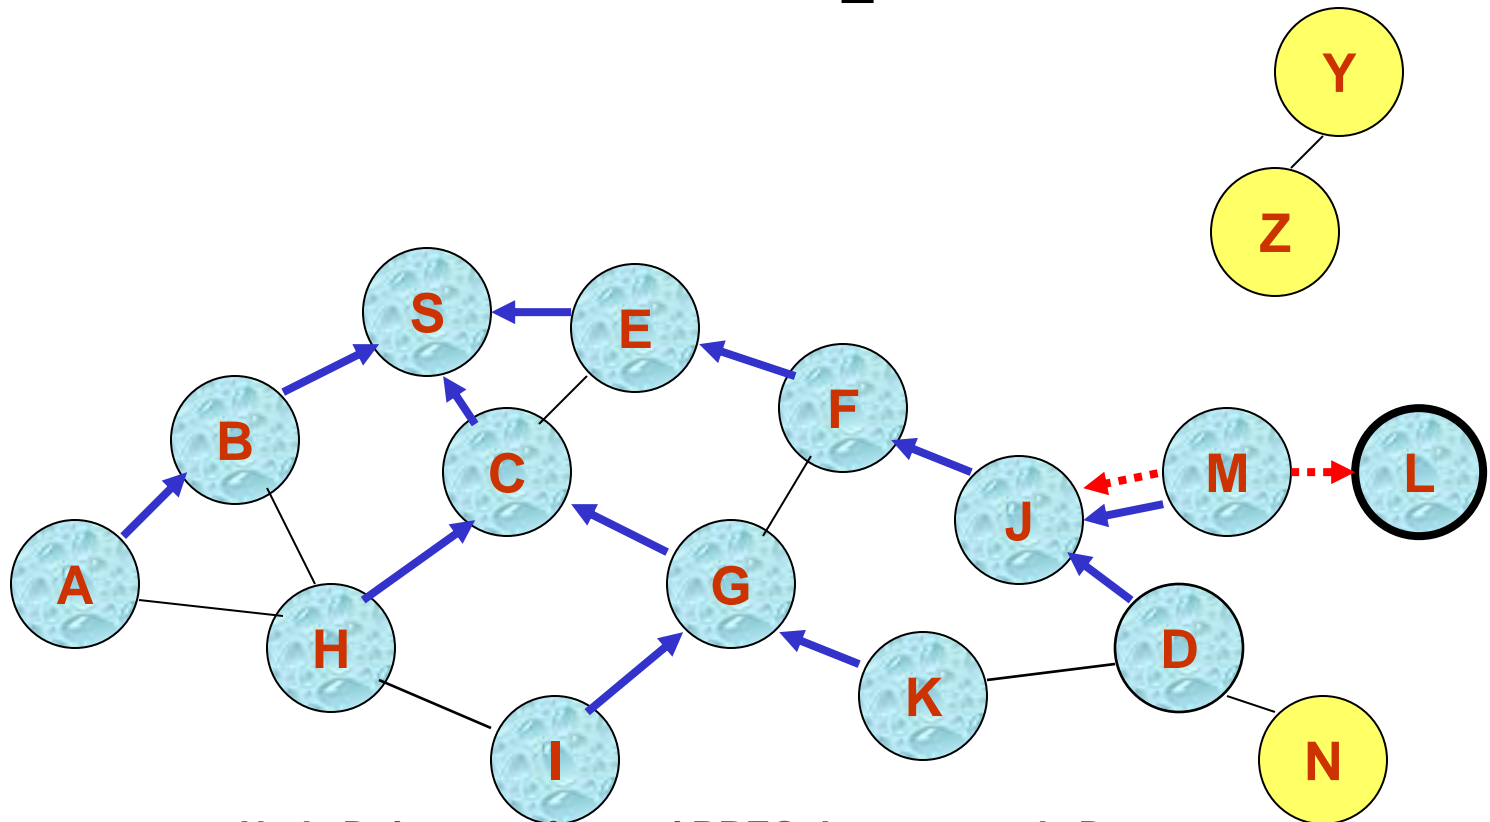# Reverse Path Setup in AODV

Node J receives RREQ
Makes reverse route entry for S, dest = S, next hop = F, hop cnt = 3
It has a route to D, and the seq# for route for D is <D's seq# in RREQ
Or
Makes reverse route entry for S, dest = S, next hop = F, hop cnt = 3
It has a route to D, and the seq# for route for D is > = D's seq# in RREQ

Reverse Path Setup in AODV

- **Node D does not forward RREQ, because node D is the target of the RREQ**
  Node D sends RREP

D creates a Route Reply (RREP), Enters D's IP addr, seq #S's IP addr, hop count to D (=0)
Unicasts RREP towards J
Or Node J sends RREP
J creates a Route Reply (RREP), Enters D's IP addr, seq #S's IP addr, hop count to D (=1)
Unicasts RREP towards F

Reverse Path Setup in AODV
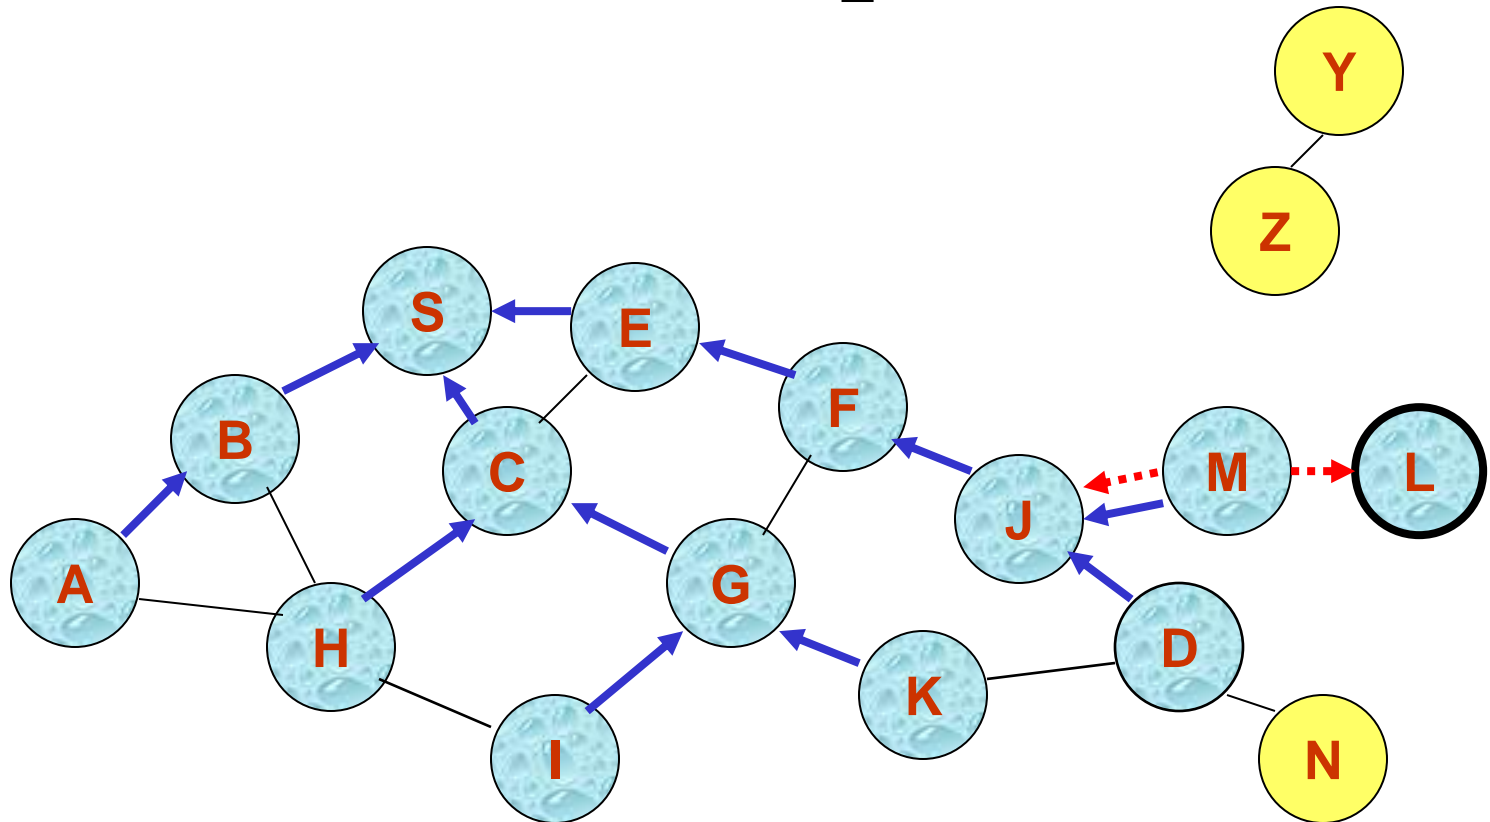
Node E receives RREP

Makes forward route entry to D

dest = D, next hop = F, <u>hop count = 3</u>, Lifetime, Unicasts RREP to S

Node S receives RREP

Makes forward route entry to D

dest = D, next hop = E, <u>hop count = 4</u>, Lifetime

Forward Path Setup in AODV

Forward links are setup when RREP travels along the reverse path

If multiple replies, uses one with lowest hop count

Represents a link on the forward path

Route Request and Route Reply

- Route Request (RREQ) includes the last known sequence number for the destination

- An intermediate node may also send a Route Reply (RREP) provided that it knows a more recent path than the one previously known to sender

- Intermediate nodes that forward the RREP, also record the next hop to destination

- A routing table entry maintaining a reverse path is purged after a timeout interval

- A routing table entry maintaining a forward path is purged if *not used* for a *active_route_timeout* interval

Link Failure

- A neighbor of node X is considered active for a routing table entry if the neighbor sent a packet within *active_route_timeout* interval which was forwarded using that entry

- Neighboring nodes periodically exchange hello messages

- Periodic route response to neighbors acts as hello, installing and refreshing route

- When the next hop link in a routing table entry breaks, all active neighbors are informed

- Link failures are propagated by means of Route Error (RERR) messages, which also update destination sequence numbers

Route Error

- When node X is unable to forward packet P (from node S to node D) on link (X,Y), it generates a RERR message

- Node X increments the destination sequence number for D cached at node X

- The incremented sequence number N is included in the RERR

- When node S receives the RERR, it initiates a new route discovery for D using destination sequence number at least as large as N

- When node D receives the route request with destination sequence number N, node D will set its sequence number to N, unless it is already larger than N

Local RERR

- Used when link breakage occurs
  - Link breakage detected by link-layer ACK, "passive ACK", AODV "Hello" messages
- Detecting node may attempt "local repair"
  - Send RREQ for destination from intermediate node
- Route Error (RERR) message generated
  - Contains list of unreachable destinations
  - Sent to "precursors": neighbors who recently sent packet which was forwarded over broken link
    - Propagated recursively

AODV: Summary

- Routes need not be included in packet headers
- Nodes maintain routing tables containing entries only for routes that are in active use
- At most one next-hop per destination maintained at each node
- Sequence numbers are used to avoid old/broken routes
- Sequence numbers prevent formation of routing loops
- Unused routes expire even if topology does not change

Proactive routing protocols

OLSR - Optimized Link State Routing Protocol

# Optimized Link State Routing Protocol (OLSR)

- **Proactive protocol**
- **Efficient link state packet forwarding mechanism**
  - **Multipoint relaying**
    - Reduced size of the control packets
      - Only a subset of the links in the link state updates
        - » Packet forwarding performed only by multipoint relays
    - Reduced number of links used for forwarding the link state packets
      - Multipoint relays

# Example of MPR in OLSR

- **Simple flooding**

- **OLSR**

MPRs
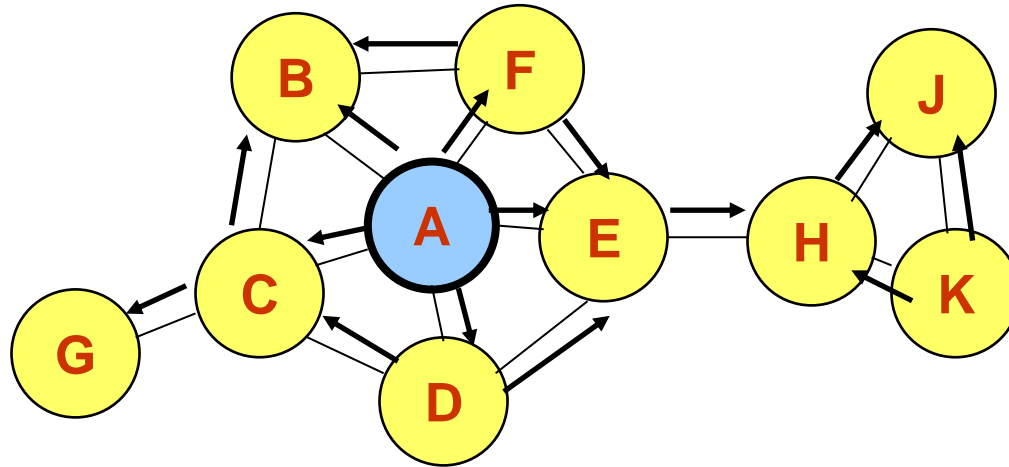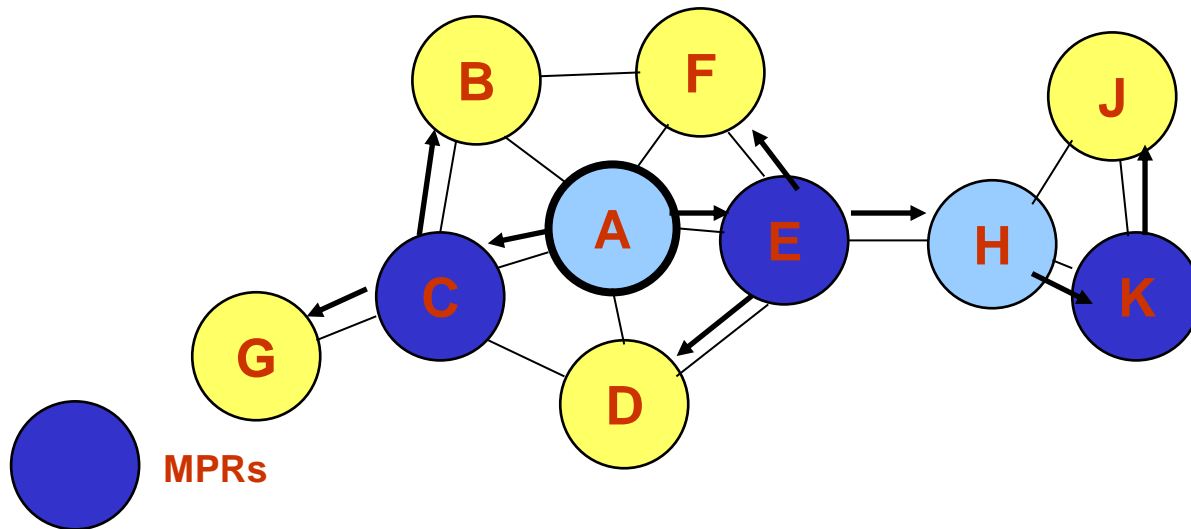
Link state forwarding

- Nodes C and E are multipoint relays of node A
  - Multipoint relays of A are its neighbors such that each two-hop neighbor of A is a one-hop neighbor of one multipoint relay of A
  - Nodes exchange neighbor lists to know their 2-hop neighbors and choose the multipoint relays

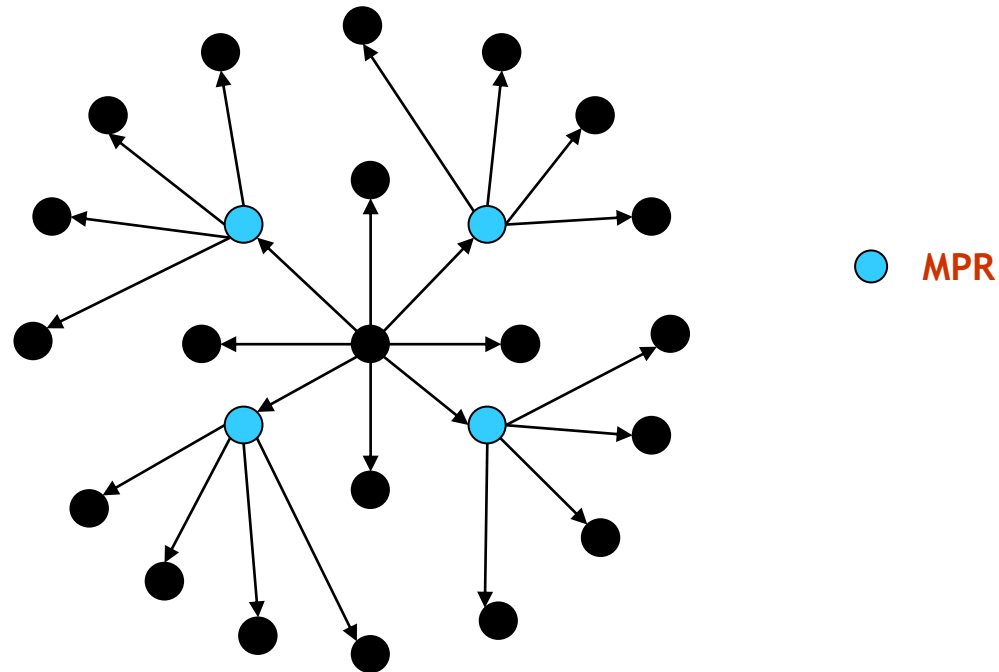**Node that has broadcast state information from A**
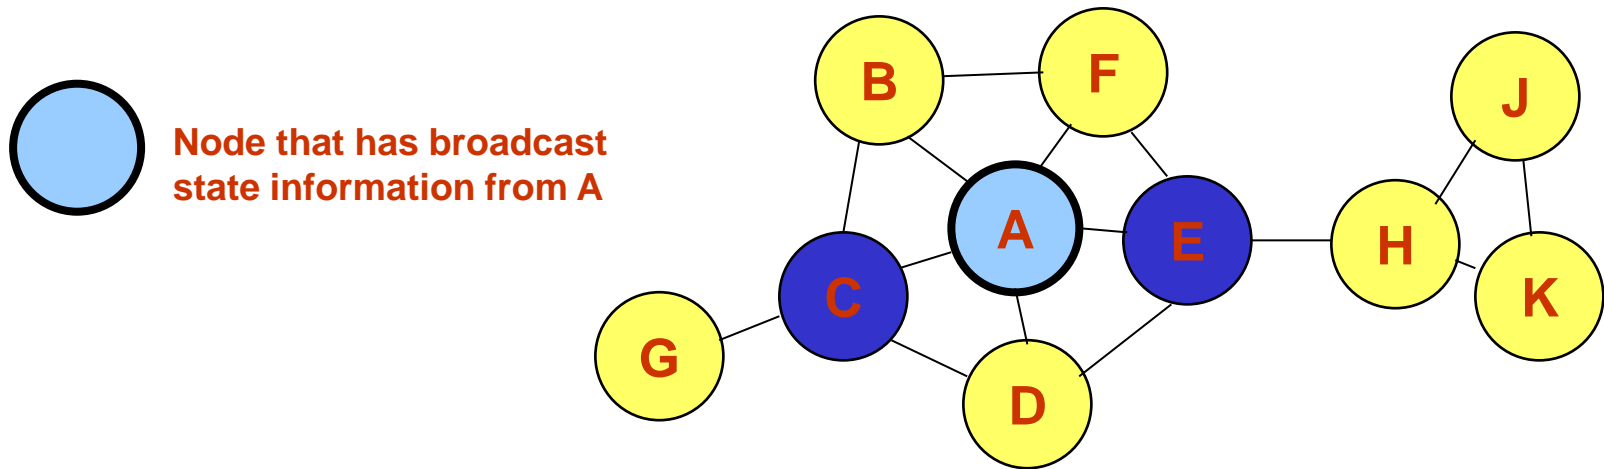
Link state forwarding

- Nodes C and E forward information received from A
- Nodes E and K are multipoint relays for node H
- Node K forwards information received from H

Node that has broadcast
state information from A

OLSR: Example

MPR
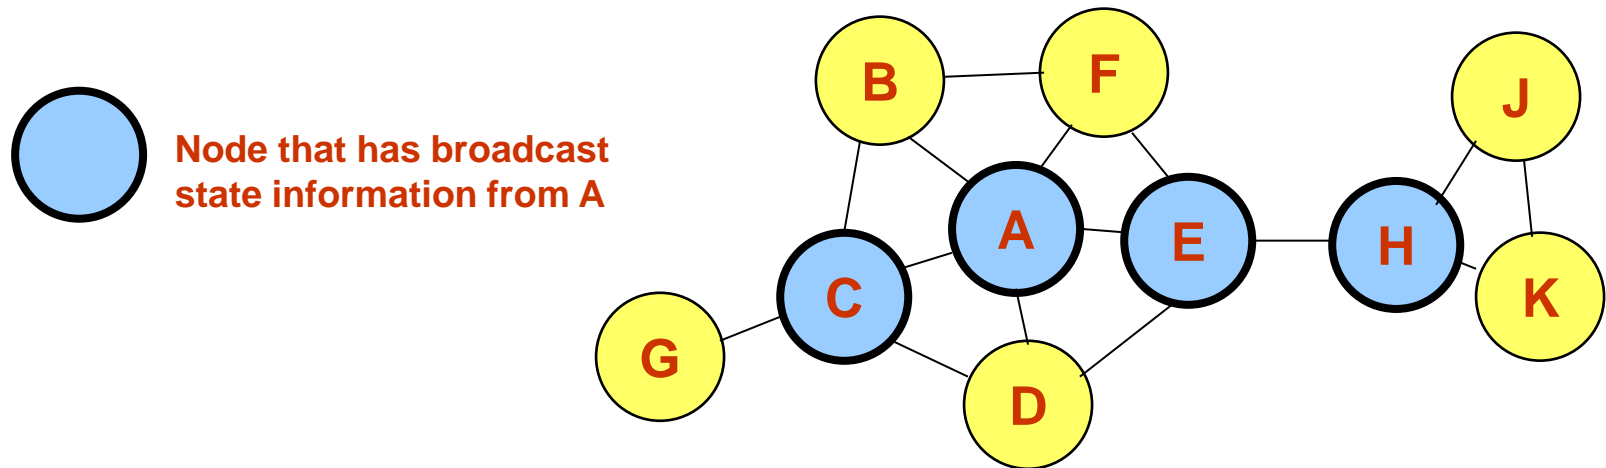
4 retransmission to diffuse a message up to 2 hops

MPR sets and MPR selectors

- MPR sets
  - Set of nodes that are multipoint relays
  - Each node selects an MPRset to process and forward every link state packet originated by it
  - Other nodes process the link state packets but do not forward them
- MPR selectors
  - Set of neighbors that have selected the node as multipoint relay
  - Node forwards packets received from nodes MPR selectors
- Members of MPR sets and MPR selectors change over time – efficient selection mechanisms

Selection of MPR

- Impact in performance
  - Node calculates routes to all destinations through the members of MPR set
- Decide on the membership of nodes in the MPR set
  - Node sends Hello messages
    - List of neighbors with which the node has bidirectional links
    - List of neighbors with whose transmissions were received in the recent past (do not know if there is bidirectionality)
  - Node receiving Hello messages
    - Update two-hop topology tables
    - Selection of multipoint relays

Selection of MPR

- Select as MPR every node in the node's two-hop neighborhood has a bidirectional link with the node

- Select as MPR, the nodes covering "isolated" nodes, i.e. for which there is a neighbor which has another node as single parent

- Select as MPR the node which covers the maximal number of nodes

Neighbor relationships

- Each device emits a periodic "Hello"

  –Advertise itself to its neighbors

  –Determine who else is there

  –Select some systems to act as MultiPoint Relays
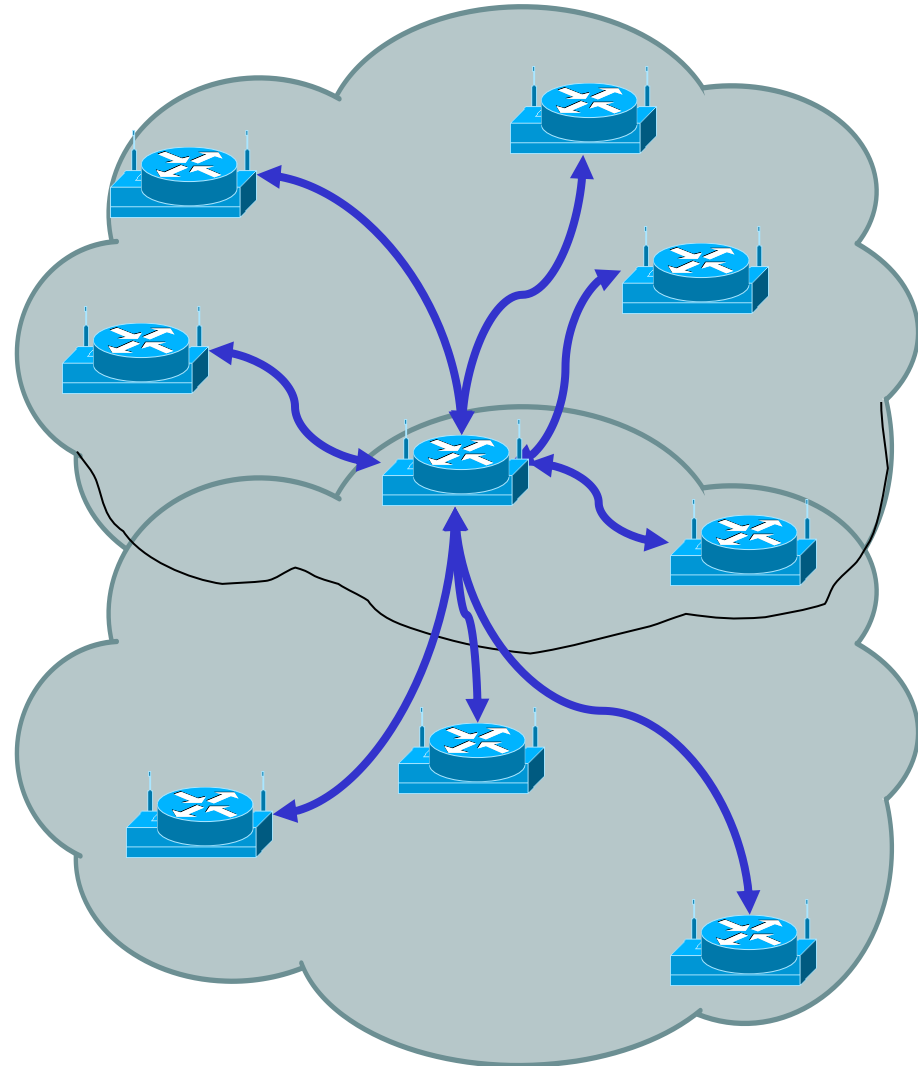
MultiPoint Relays

- Passes Topology Information
  - –Acts as router between hosts
  - –Minimizes information retransmission
  - –Forms a routing backbone
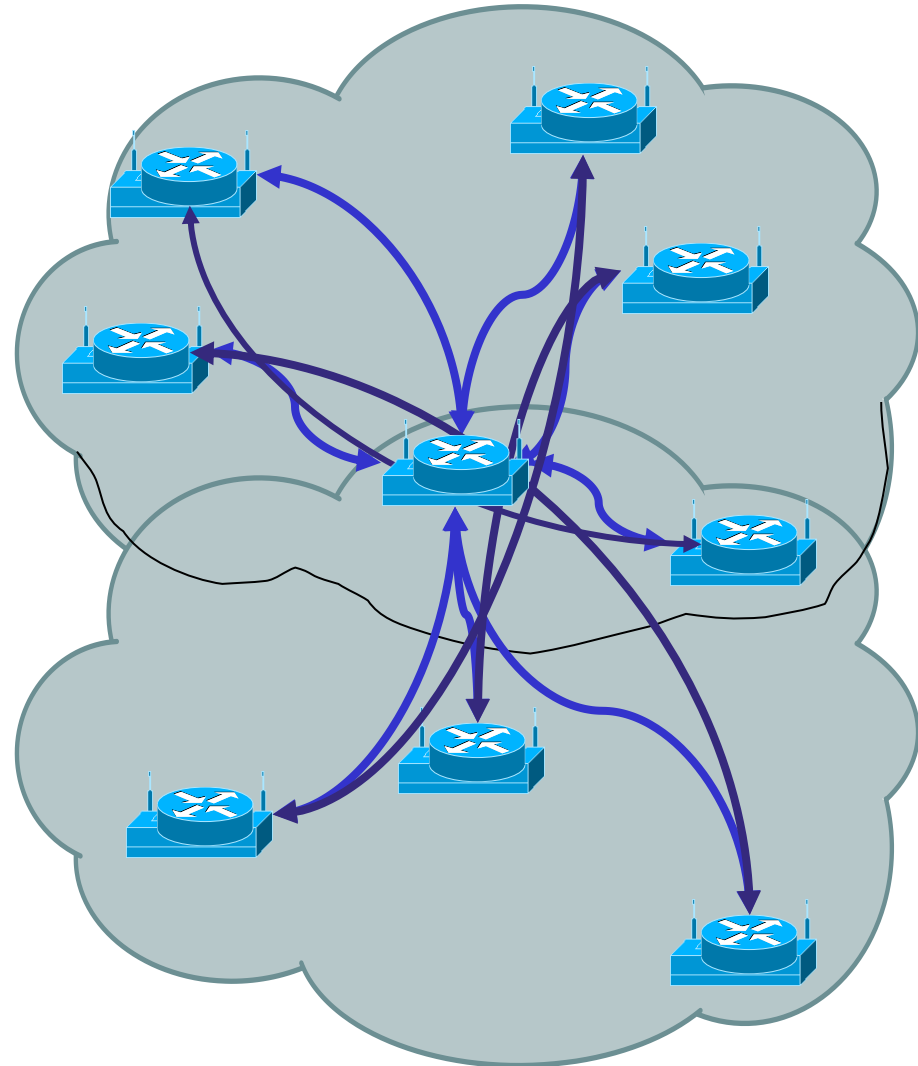
Structure of an OLSR Network

- MPRs form routing backbone
    - Other nodes act as "hosts"
- As devices move
    - Topological relationships change
    - Routes change
    - Backbone shape and composition changes
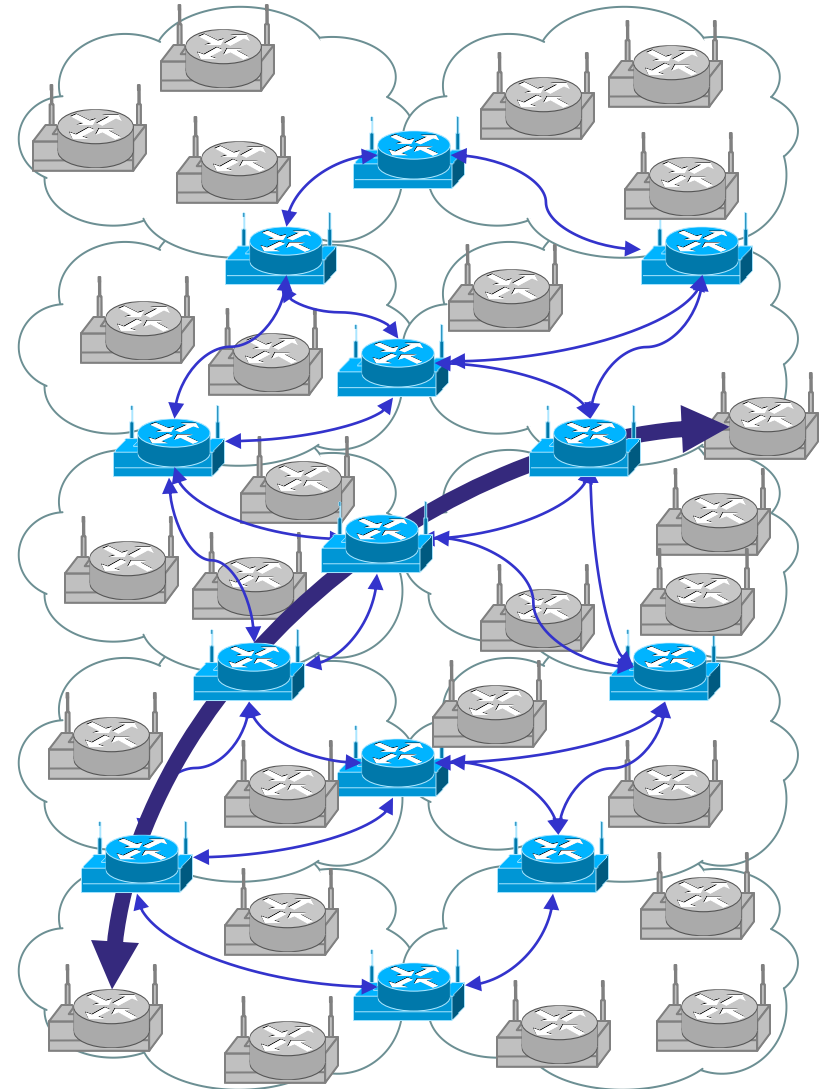
Location-based routing protocols

LAR – Location Aided Routing

The main problems of previous mechanisms

- Nodes location changes rapidly
- No information regarding
  - Current location
  - Speed
  - Direction
- Knowing the location
  - Minimizes the search zone
  - No need to flood the network
- Knowing the speed and/or direction
  - More minimization of the search zone
  - Increases the probability to find the necessary node

Location-Aided Routing (LAR)

- Each node knows its location in every moment
- Using location information for route discovery
- Routing is done using the last known location + an assumption
- Route discovery is initiated when
  - S does not know a route to D
  - Previous route from S to D is broken
- Assumptions
  - Location knowledge
  - No error
  - 2D movement
  - Full cooperation

Location information

- Alignment of satellites and ground stations
- Global Positioning System (GPS) - USA
- Global Navigation Satellite System (GLONASS) - Russia
- Galileo – EU
- 3D positioning
- Accuracy 3-100 meters
- Can provide further information
  - Velocity
  - Time
- Cutting edge technology
- Already in use in many fields

LAR - Definitions

- Expected Zone (EZ)
  - S knows the location L of D in t_0
  - Current time t_1
  - The location of D in t_1 is the expected zone
  - Assume Max/Avg speed v
- Request Zone (RZ)
  - Flood with a modification
  - Node S defines a request zone for the route request
  - How to determine the size and shape of the request zone?
  - Several considerations
    - If the destination's EZ does not include the source node, other regions must be included in the RZ
    - Not always a route will be found using a certain RZ
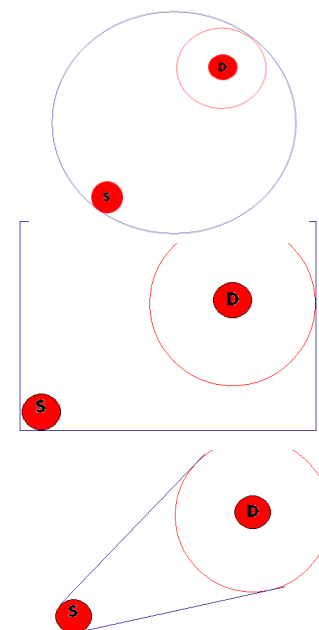
LAR – scheme 1 (Algorithm)

- Node I receives RREQ
  - Location of I – (X_i, Y_i)
  - If I is within the rectangular, I forwards the RREQ to its neighbors
  - Else I discards the RREQ
- Node D receives the RREQ
  - Replies RREP
  - Adds its current location

LAR – scheme 1 (some issues)

- The rectangular size is proportional to
  - Average speed (v)
  - Time elapsed (t_1-t_0)
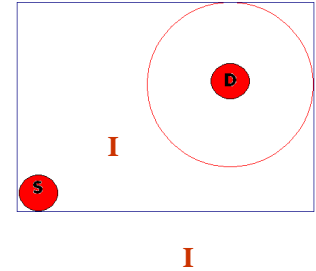
  Therefore
  - Low speed $\Rightarrow$ small v in the same (t_1-t_0) $\Rightarrow$ smaller RZ
  - High speed $\Rightarrow$ large v in the same (t_1-t_0) $\Rightarrow$ larger RZ
- Improvements
  - D can add its speed/avg. speed in the RREP, this can help other nodes in future route discoveries
  - D can piggyback its location in other packets

BATMAN

A Better Approach to Mobile Ad hoc Networking

https://www.researchgate.net/publication/320172464_Better_approach_to_mobile_ad-hoc_networking_BATMAN

https://www.open-mesh.org/projects/batman-adv/wiki/BATMAN_IV

Batman

- Traditionally, nodes exchange control packets that contain information about link state (current link utilization, bandwidth, etc).
  - Nodes determine best paths based on control packets.
  - Every node must have near exhaustive information about the entire network
- BATMAN takes a very different approach:
  - The presence or absence of control packets is used to indicate link (and path) quality.
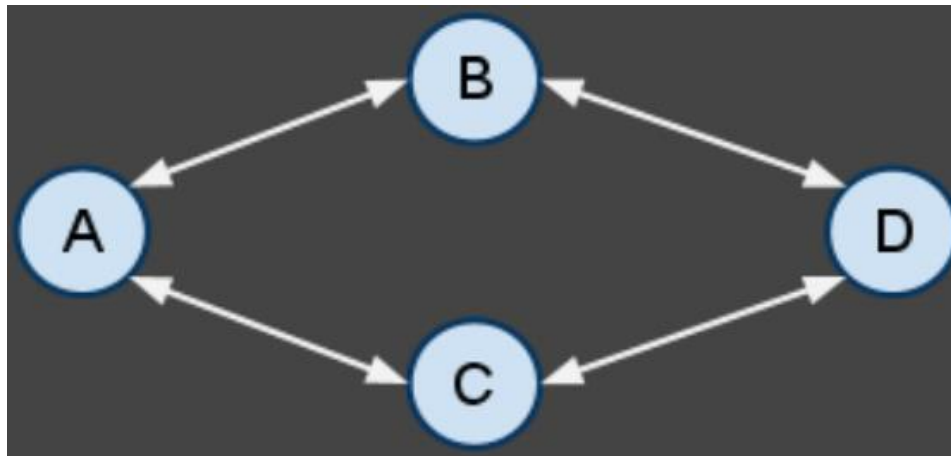
Batman Operation

- Each node has a set of direct-link neighbors
  - In the figure, node A has neighbors B and C. These are the nodes through which A sends and receives all its packets.

- Each node in the network sends an Originator Message (OGM) periodically, in order to inform all other nodes of its presence
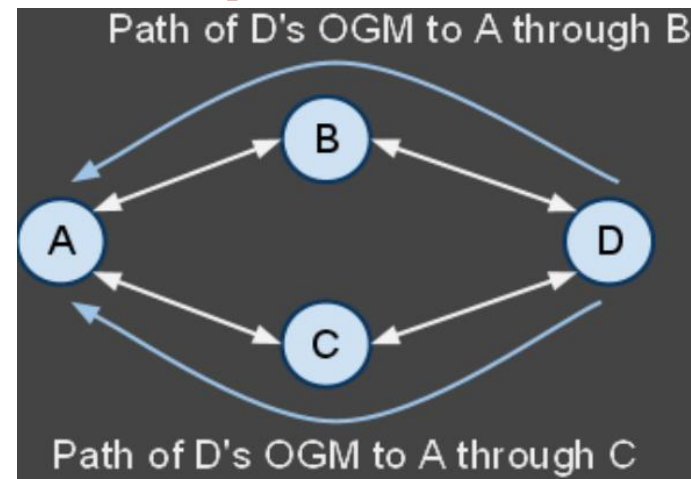 - OGMs include a sequence number

- If all shown links are perfect, Node A will receive node D's OGM through both of its neighbors B and C.
  - If all of D's OGMs arrive through both B and C, then when A needs to send something to D, it can use either B or C as the next hop towards the destination node D.

Path of D's OGM to A through B

Path of D's OGM to A through C

Batman Operation

- If the link between nodes A and C goes down
  - Node D's OGM will only arrive to A through node B.
  - Node A therefore considers node B as the best next hop neighbor for all packets destined for node D.
  - Further, Node C's OGMs will also only reach node A through node B. Node B is the best next hop for data destined for Node C.

Path of D's OGM to A through B
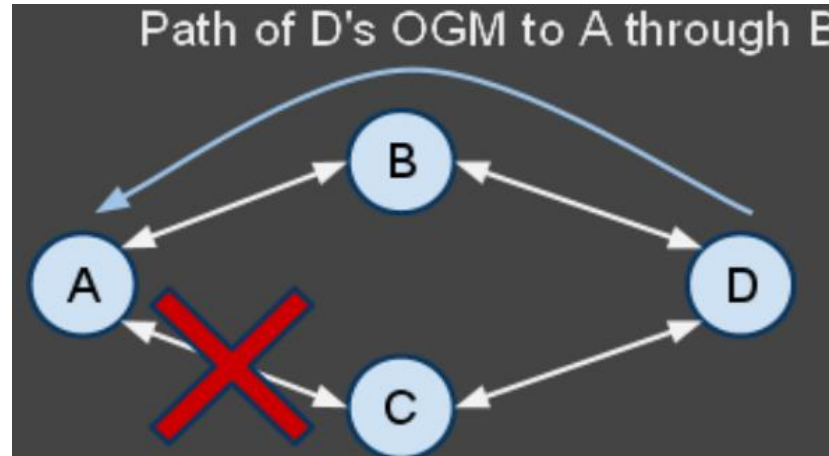
Batman: sliding window

- If some but not all OGMs arrive through a link
  - Sliding window
- A sliding window indicates which of the last WINDOW_SIZE (in the example, 8) sequence numbers have been received
  - Uses the sequence numbers received through OGMs

	Out of Range				In Window Range								Out of Range			
Seq. Numbers:	...	5	6	7	8	9	10	11	12	13	14	15	16	17	18	...
Arrived:	...	-	-	-	1	1	1	0	1	0	1	1	-	-	-	...

Sequence numbers and sliding window

- When an out of range sequence number is received, in this case seq# 17, the window shifts up.
  - From 6 sequence numbers in-range to only 5.

		Out of Range			In Window Range								Out of Range			
Seq. Numbers:	...	5	6	7	8	9	10	11	12	13	14	15	16	17	18	...
Arrived:	...	-	-	-	1	1	1	0	1	0	1	1	-	-	-	...

Seq # 17 arrives

|		Out of Range			In Window Range								Out of Range			
Seq. Numbers:	...	7	8	9	10	11	12	13	14	15	16	17	18	19	20	...
Arrived:	...	-	-	-	1	0	1	0	1	1	0	1	-	-	-	...
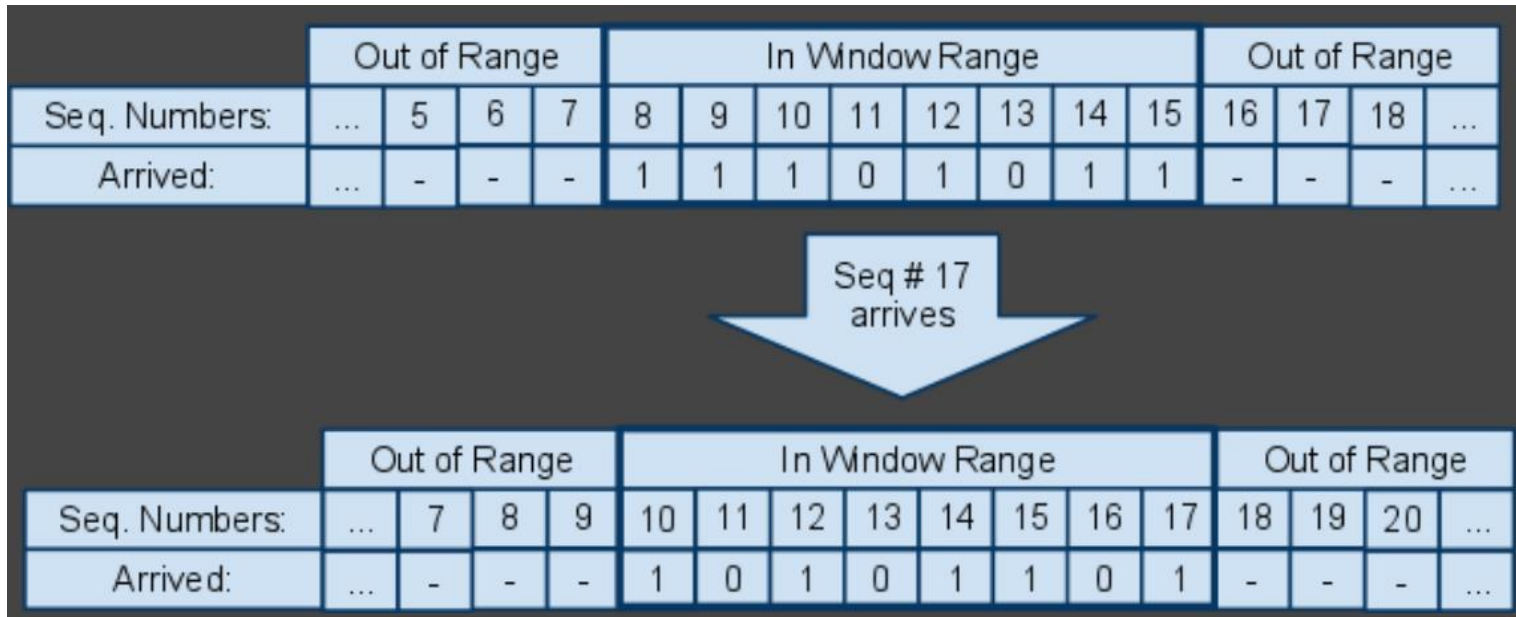
Routing table

- All nodes have a sliding window for each originator (other node) in the network for each neighbor

| Originators	Neighbour	In Window Range Packet Count	
B	B		8
	C		3
C	B		6
	C		2
D	B		7
	C		2

Information stored by node A in order to determine best next hop to each node in the network
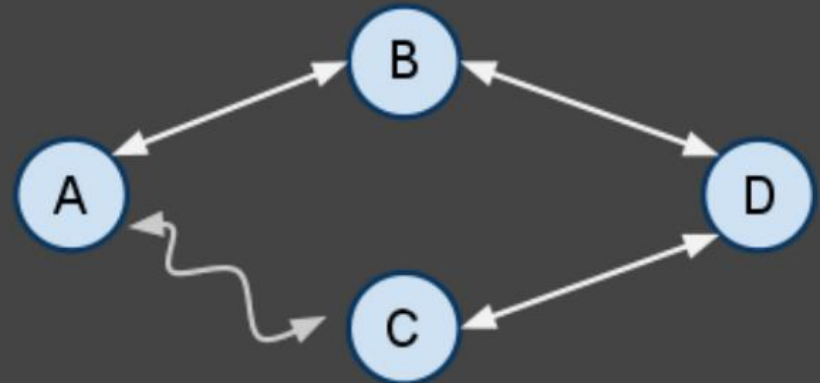
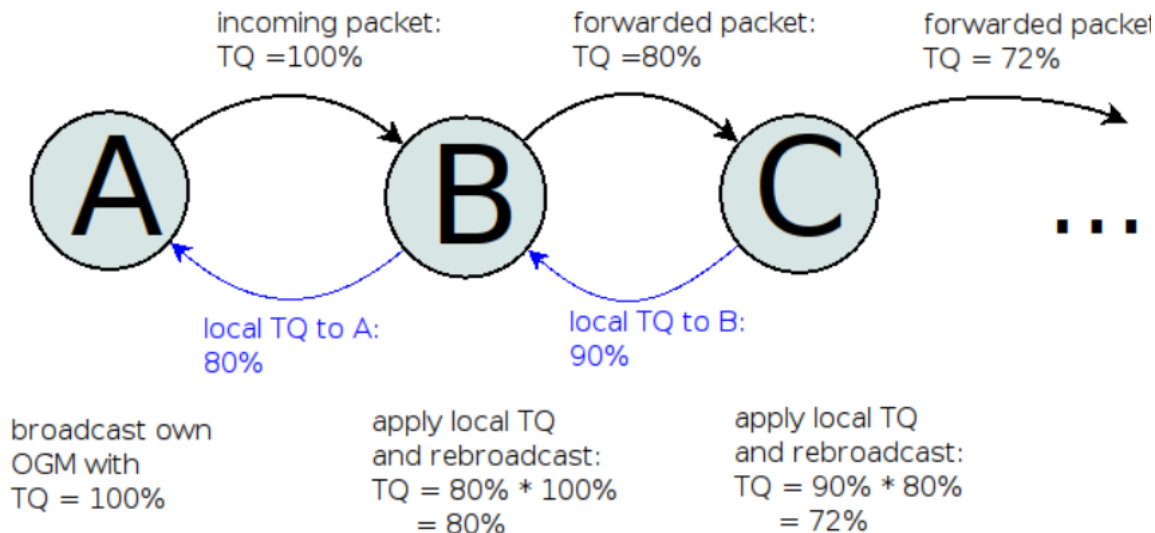# Batman Operation

- BATMAN receives information about link (and path) quality through the presence or absence of control packets.
  - Collective intelligence - retransmission of an OGM implies it arrived successfully through a best-link neighbour
  - No node needs to have exhaustive knowledge of the network, just the next hops to the destination (information about the destinations comes from OGMs)
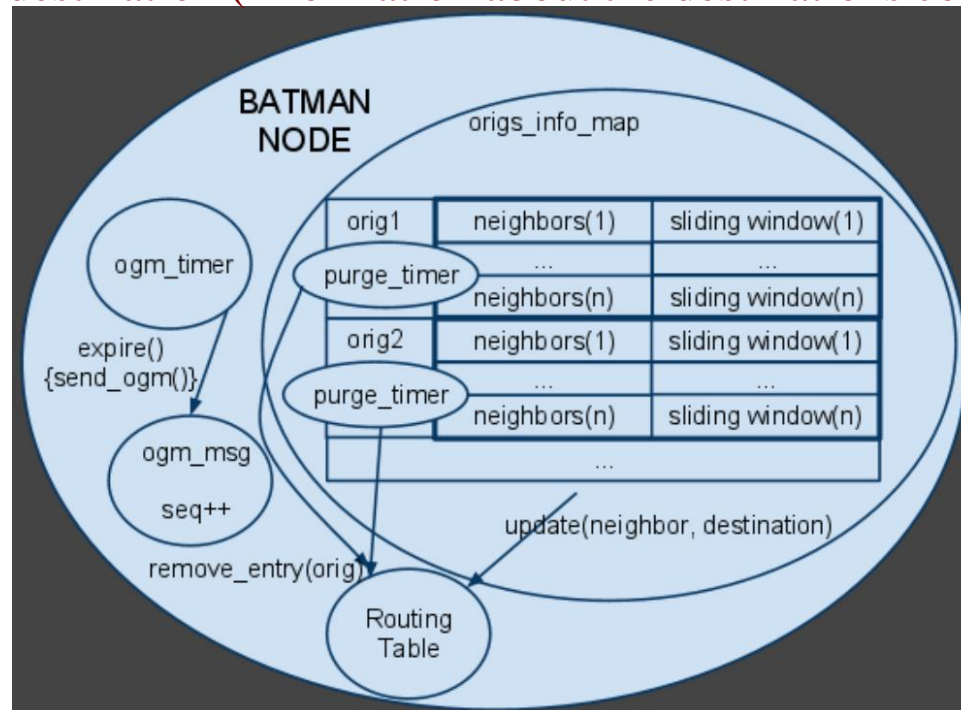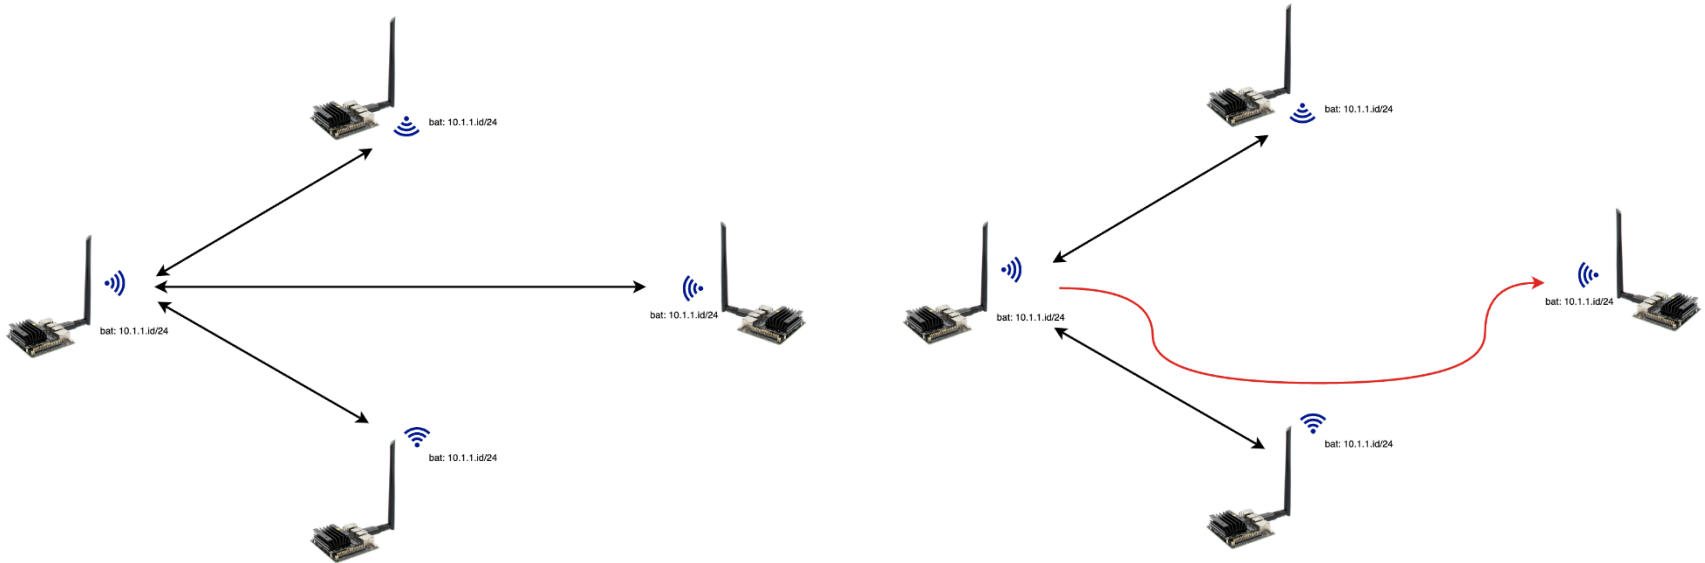
Transmission Quality (Batman v.3)

- To add the local link quality in the TQ value, the following calculation is performed:

- TQ = TQ_{incoming} * TQ_{local}

- Example: Node A broadcasts the packet with TQ max. Node B receives it, applies the TQ calculation and rebroadcasts it. When node C gets the packet it knows about the transmit quality towards node A.

incoming packet:
TQ =100%

forwarded packet:
TQ =80%

forwarded packet
TQ = 72%

A   B   C   ...

local TQ to A:
80%

local TQ to B:
90%

broadcast own
OGM with
TQ = 100%

apply local TQ
and rebroadcast:
TQ = 80% * 100%
= 80%

apply local TQ
and rebroadcast:
TQ = 90% * 80%
= 72%

Example

Comparison

- AODV pros and cons
  - Low overhead
  - Slow discovery and recovery
- OLSR pros and cons
  - Medium overhead
  - Fast discovery and recovery
  - MPRs automation
- LAR pros and cons
  - Medium overhead
  - How to discover the location of destination?
- Batman pros and cons
  - Medium-high overhead
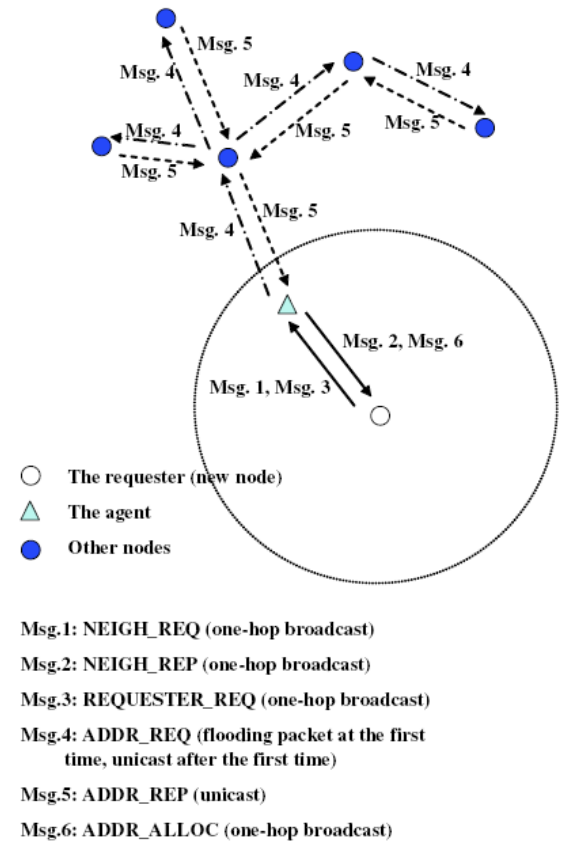 - Fast discovery and recovery

IP Address Assignment

https://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=1019354

https://docs.pycom.io/pymesh/

MANETconf

- Distributed mutual exclusion algorithm to check the uniqueness of the address
- Assigning an address to a new node requires an agreement from all the known nodes in the network
  - Each node has a global address allocation table maintaining currently in use addresses
  - Node (requester) broadcasts a NEIGH_REQ message to one-hop neighbors
  - Each neighbor answers back to the requester (NEIGH_REP)
  - Requester node selects one of neighbors as its agent, which performs address allocation on behalf of the requester
    - It then sends a REQUESTER_REQ to the agent to request an address
    - The agent picks a currently unused address from its table and floods an ADDR_REQ to obtain an agreement from all other configured nodes in the network
    - Each node in the network sends an ADDR_REP reply back to the agent
    - If the agent receives a reply from all the other nodes, it assigns the address to the requester by sending ADDR_ALLOC

○ The requester (new node)
△ The agent
● Other nodes

Msg.1: NEIGH_REQ (one-hop broadcast)
Msg.2: NEIGH_REP (one-hop broadcast)
Msg.3: REQUESTER_REQ (one-hop broadcast)
Msg.4: ADDR_REQ (flooding packet at the first time, unicast after the first time)
Msg.5: ADDR_REP (unicast)
Msg.6: ADDR_ALLOC (one-hop broadcast)

63

PyMesh Addressing

- Ad-hoc communication network over raw-LoRa

- Multi-gateway (Border Router) Nodes that connect Mesh-internal data with the Cloud

- Each Node uses LBS - Listen Before Talk

- Security on multiple levels

- Any LoRa device (Lopy4/Fipy) can have any of the Pymesh Node Role: Leader, Router, Child or Border Router.
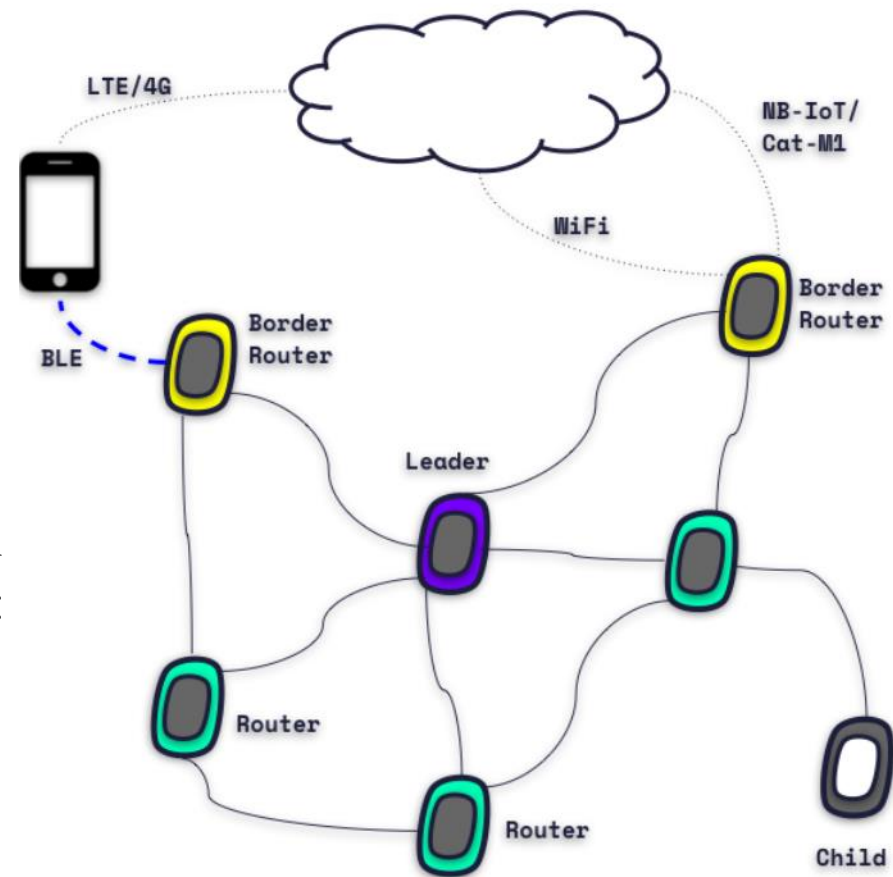
PyMesh Addressing
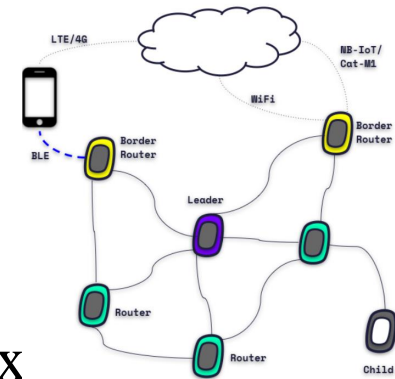
- Declare the Border Router network address prefix, for example 2001:dead:beef:cafe::/64

- The network address prefix is then sent to the Leader

- All the nodes will be assigned a random IPv6 unicast address with this network prefix (for example 2001:dead:beef:cafe:1234:5678:9ABC:DEF0)

- If a node sends data to an IPv6 which is external (prefix from non-existent networks in Pymesh), then the UDP datagram will be routed to the Border Router

- This UDP packet will have as source the random IPv6 from the border router network address

PyMesh Addressing and Communication

- The Border Router will receive the external UDP datagrams with an appended header, which contains:
  - MAGIC byte: 0xBB
  - IPv6 destination as bytearray (16 bytes)
    - bytearray([source, encoding, errors])
    - Returns the bytearray of the bytes array passed in
  - port destination as 2 bytes (1-65535 values).
  - The IPv6 destination is important, because it means that the Border Router can route (forward) the UDP datagram content to the correct interface (Wifi/BLE/cellular).