



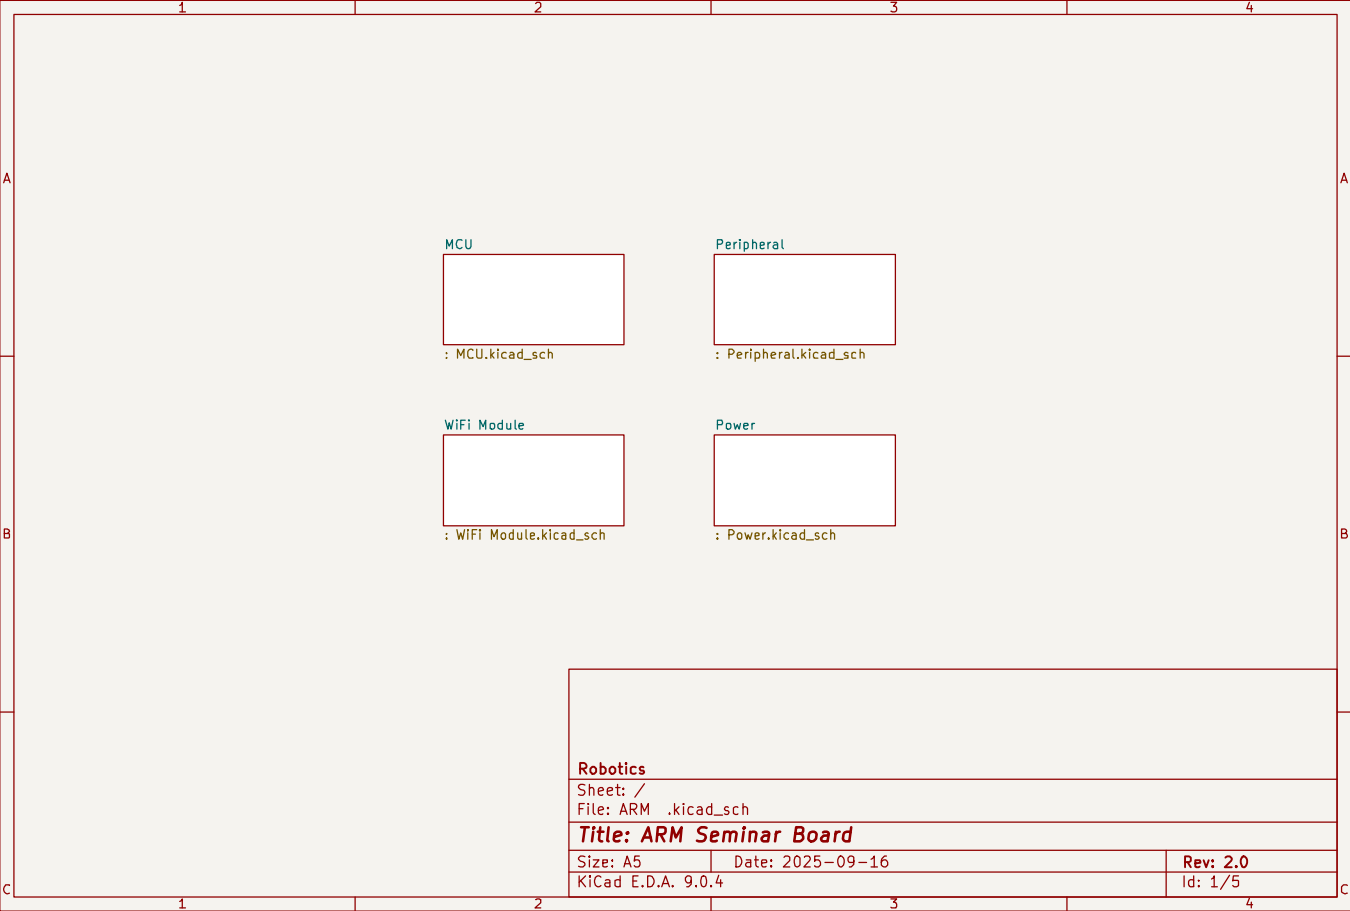

MCU

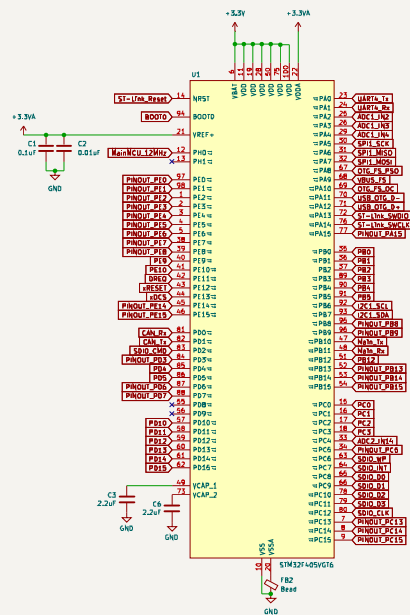

Id: 3/5

	1	2	3
GPIO			



Analog



SDIO



SPI



EEPROM

Temp Sensors

The diagram shows the I2C connection between an LPC1114 microcontroller and an ADXL345 accelerometer. The microcontroller's I2C pins (SCL, SDA) are connected to the accelerometer's SCL and SDA pins. A pull-up resistor of 10k is connected between SCL and VCC (3.3V). A pull-up resistor of 4.7k is connected between SDA and VCC. The accelerometer's GND is connected to the microcontroller's GND. The microcontroller's VCC is connected to a 3.3V supply. The accelerometer's VCC is connected to the microcontroller's VCC. The accelerometer's SCL pin is labeled 'TP4' and 'I2C_BAT'.

CAN







Servo



USB



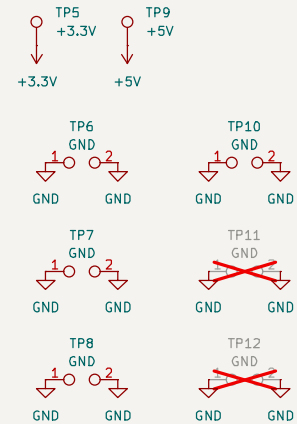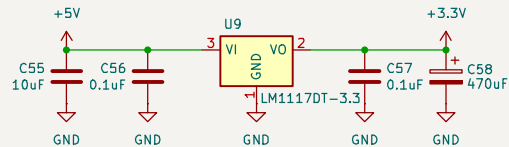

Robotics

Sheet: /Power/
File: Power.kicad_sch

Title: Power

Size: A5
KiCad E.D.A. 9.0.4

Date: 2025-05-20

Rev: 1.0
Id: 5/5