
Krypton Calibration Run 8616

Krypton Calibration Group

Conditions and data

Table: Conditions and data for run 8616

Conditions	Data
run number	8616
file range	(0,1950)
date	2021-05-01
lab temperature:	nan deg
Total number of S2s	509697
Total number of events	503281






Figure: Run data.

Table: S1 & S2 for run 8616

Conditions	Data
fraction of S1s	0.87
fraction of S2s (1 S1)	0.99
fraction 1 S2 & 1 S1	0.86




Figure: S1 distributions.




Figure: S2 distributions.

Control distributions

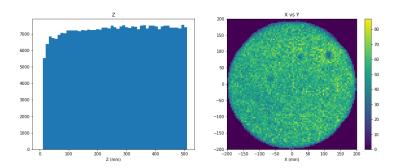


Figure: XYZ distribution.

Lifetime maps




Figure: Lifetime and geometrical map.

Lifetime maps





Figure: Average lifetime.

Lifetime and geometry correction



R Profile showing R dropout





Figure: R profile shows that fiducial volume must be R < 180mm.

Profiles after R < 180mm






Figure: Profiles showing correction is robust.

Resolution fits as a function of R and Z

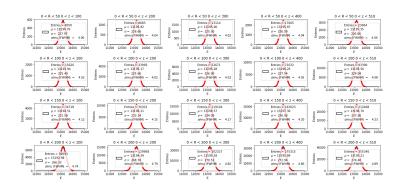


Figure: Resolution fits.

Resolution as a function of R and Z

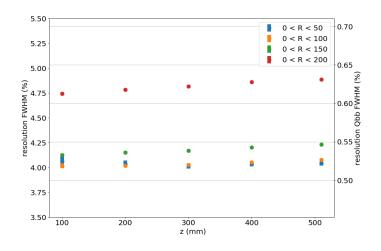


Figure: Resolution fits.

Efficiency over time

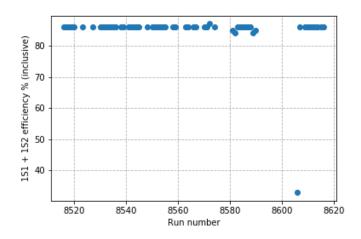


Figure: Efficiency tracking over time.

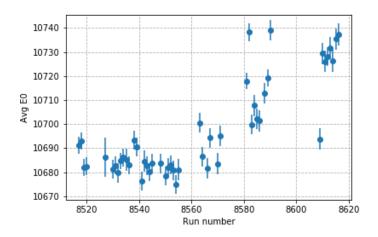


Figure: Response tracking over time.

Lifetime over time

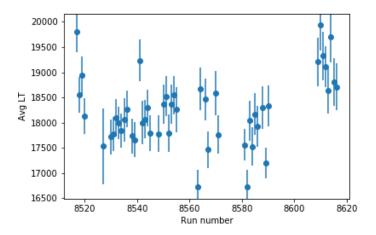


Figure: Lifetime tracking over time.

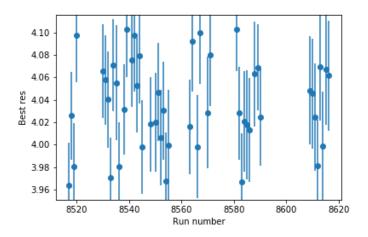


Figure: Resolution tracking over time.