

Conducted Emission Measurement


2025-6-19

Data :#1

Date: 2025/6/19

Time: 15:01:51

120.0 dBuV

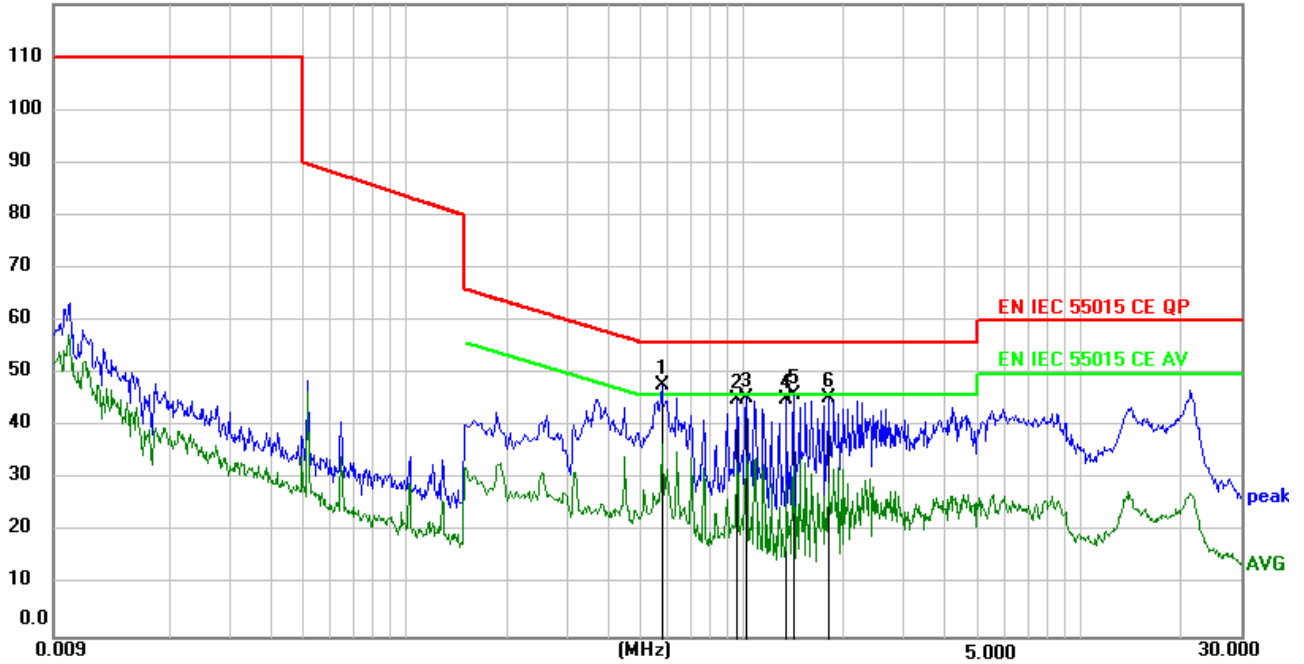

Site LAB

Phase: **L1**

Temperature: 26(C)

Limit: EN IEC 55015 CE QP

Power:

Humidity: 54 %RH

EUT:

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.5731	37.60	10.10	47.70	56.00	-8.30	peak	P	
2	0.9601	35.11	10.11	45.22	56.00	-10.78	peak	P	
3	1.0231	35.49	10.11	45.60	56.00	-10.40	peak	P	
4	1.3471	34.90	10.11	45.01	56.00	-10.99	peak	P	
5	1.4101	35.91	10.11	46.02	56.00	-9.98	peak	P	
6	1.7971	35.22	10.11	45.33	56.00	-10.67	peak	P	

*:Maximum data x:Over limit !:over margin

Conducted Emission Measurement


2025-6-19

Data :#2

Date: 2025/6/19

Time: 15:04:28

120.0 dBuV

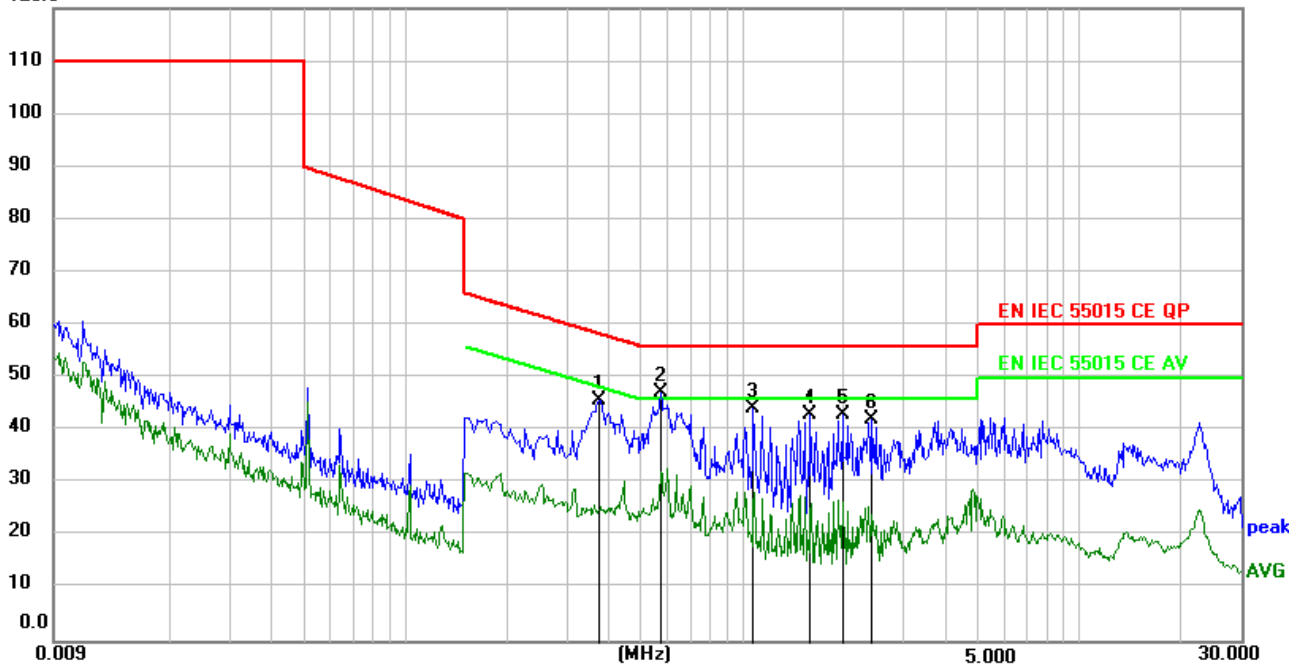

Site LAB

Phase: **N**

Temperature: 26(C)

Limit: EN IEC 55015 CE QP

Power:

Humidity: 54 %RH

EUT:

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3751	35.70	10.10	45.80	58.39	-12.59	peak	P	
2 *	0.5686	37.19	10.10	47.29	56.00	-8.71	peak	P	
3	1.0771	34.20	10.11	44.31	56.00	-11.69	peak	P	
4	1.5901	33.04	10.11	43.15	56.00	-12.85	peak	P	
5	1.9771	33.08	10.11	43.19	56.00	-12.81	peak	P	
6	2.4226	32.06	10.12	42.18	56.00	-13.82	peak	P	

*:Maximum data x:Over limit !:over margin