

TS2 Integration Passive Simulation Report

Simulation Parameters

Key	Value	Key	Value
seed	0	hh_leak_e_mV	-54.3
T_ms	500	hh_tag	5
delay_ms	20	K_revpot_mV	-77.0
discretization_um	1.0	K_intcon_mM	54.4
dt_sim_ms	0.02	K_extcon_mM	2.5
dt_record_ms	1.0	K_gbar_S_per_cm2	0.036
spine_tag	3	Na_revpot_mV	50.0
sink_tag	5	Na_intcon_mM	10.0
sink_radii_scale	1.0	Na_extcon_mM	140.0
neck_radius_scale	1.0	Na_gbar_S_per_cm2	0.12
temp_K	273	Ca_revpot_mV	132.458
Vrest_mV	-65.0	Ca_intcon_mM	5e-05
cm_uF_per_cm2	10.0	Ca_extcon_mM	2.0
rL_ohm_cm	100	Ca_gbar_S_per_cm2	0.0002
gj_weight_uS	1.0	ampa_gmax_uS	0.4
pas_leak_g_S_per_cm2	0.001	ampa_tau_ms	2.0
hh_leak_g_S_per_cm2	0.0003		


Input Configuration

Key	Value
Number of synapses	6
Input rates (Hz)	[10.0, 50.0, 100.0]
SWC file	TS2_s50_wsink_r10um.swc
Synapse points file	TS2_synpts.txt


Integrated Voltage Traces

Voltage traces integrated across all segments with the specified tags. Tag 3 = spine, Tag 5 = sink.

Integrated Voltage Traces

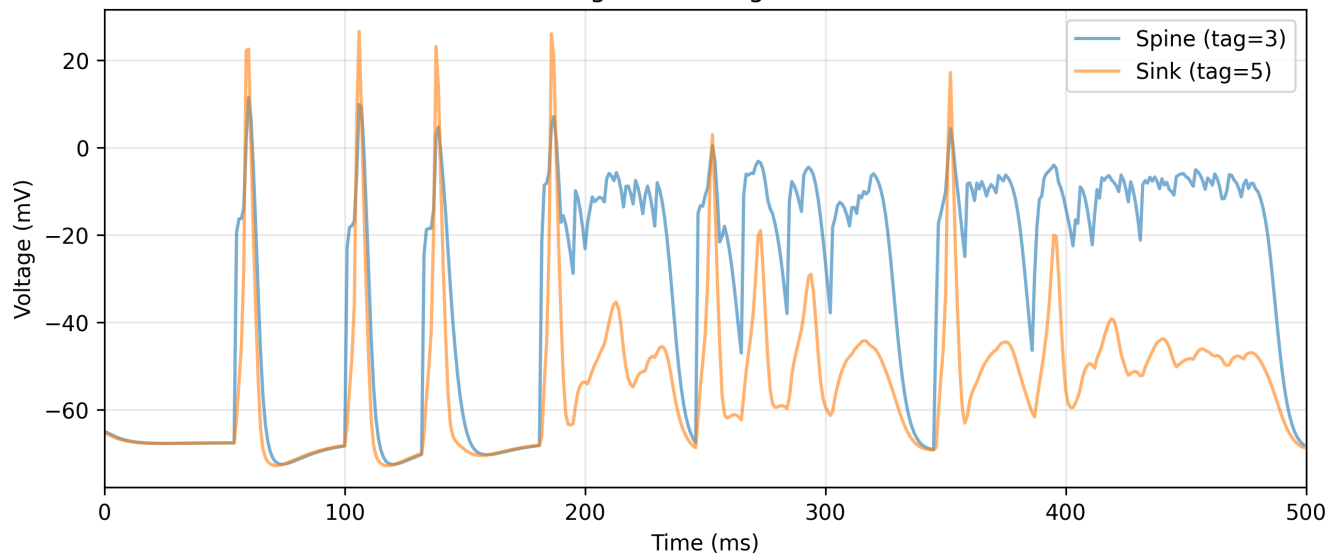

Spine vs Sink Voltage

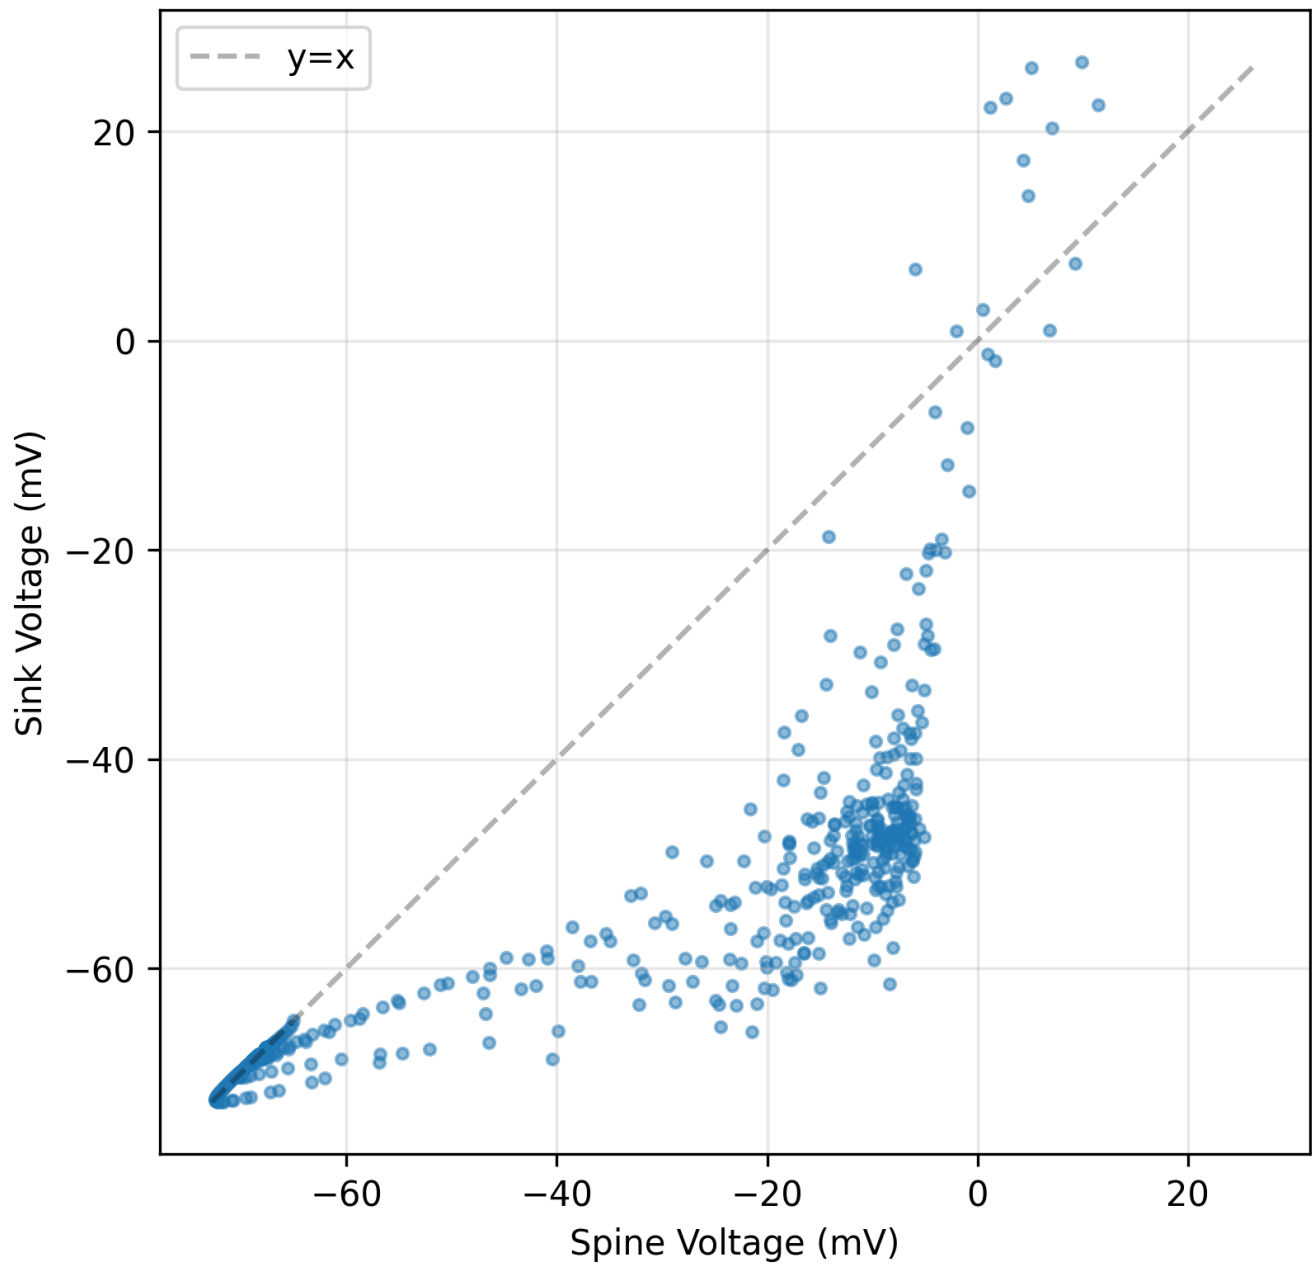

Input Event Streams

