


# Microphone characteristics


IEC 60268-4 measurement of microphone rated characteristics per IEC 60268-4:2014; frequency and polar graphs to IEC 60263:1982.

### Rated characteristics


|                              |                            |
|------------------------------|----------------------------|
| Free-field sensitivity       | 12.5 mV/Pa                 |
| Level re 1 V/Pa [dB]         | -38.1                      |
| Effective frequency range    | 30–19032 Hz                |
| Rated impedance              | 150 Ω                      |
| Min. load impedance          | 1000 Ω                     |
| Equivalent noise level       | 14.0 dB(A)                 |
| Signal-to-noise ratio        | 80.0 dB(A)                 |
| Max. SPL (0.5 % THD)         | 130.0 dB                   |
| Directivity index at 1000 Hz | 4.8 dB                     |
| Powering                     | Phantom P48<br>(IEC 61938) |
| Supply current [mA]          | 3.1                        |

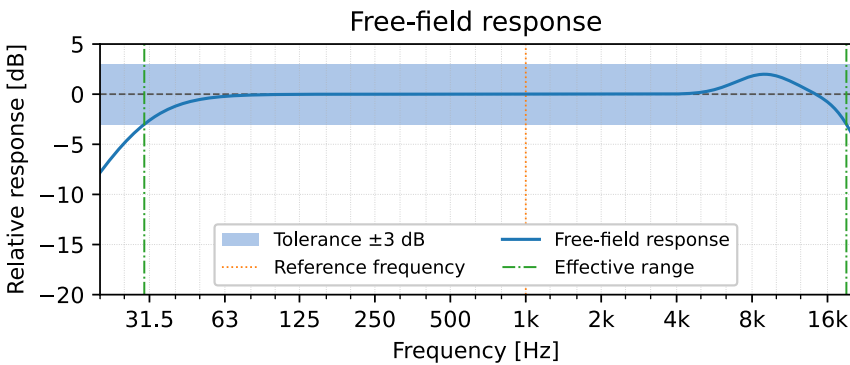


### Directional response at 1000 Hz



### Inherent noise spectrum

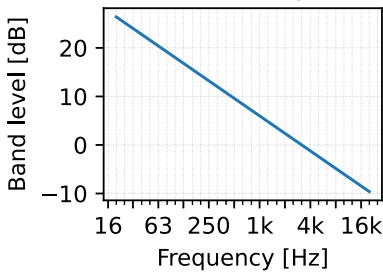

### Total harmonic distortion

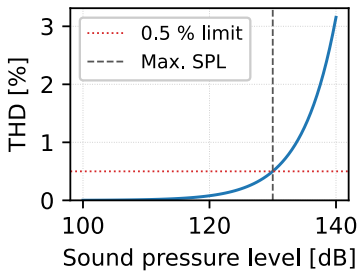

Free-field sensitivity **12.5 mV/Pa** (-38.1 dB re 1 V/Pa at 1000 Hz); effective frequency range **30–19032 Hz** (±3 dB)

■ The results relate only to the tested specimen.  
Generated by phonometry.