


Loudspeaker characteristics

IEC 60268-5 measurement of loudspeaker rated characteristics per IEC 60268-5:2003+A1:2007; frequency and polar graphs to IEC 60263:1982.




Rated characteristics

Rated impedance	8 Ω
Characteristic sensitivity	87.1 dB
Effective frequency range	37–21361 Hz
Minimum impedance	6.6 Ω
Directivity index at 2000 Hz	8.3 dB

On-axis response

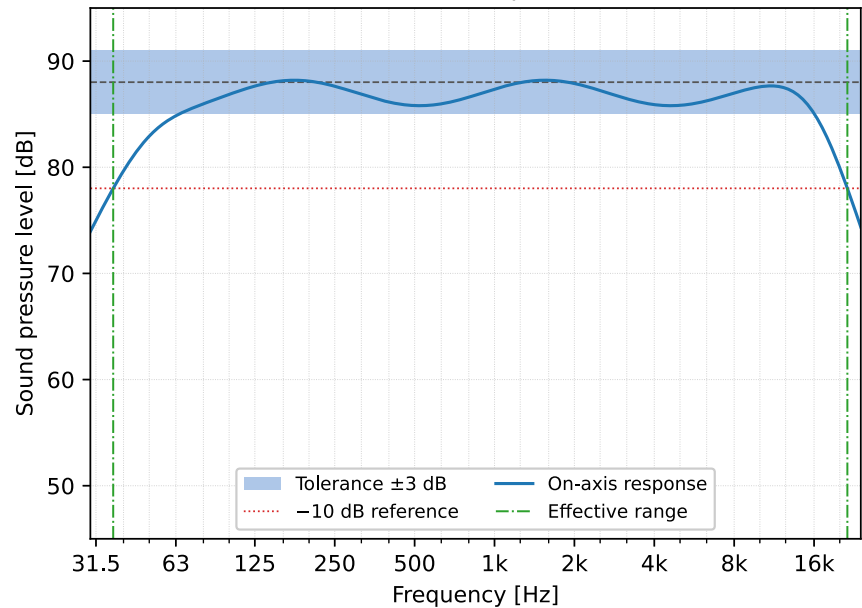

Directional response at 2000 Hz

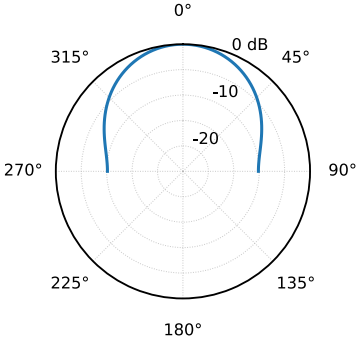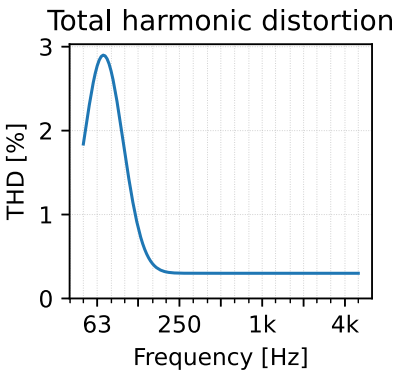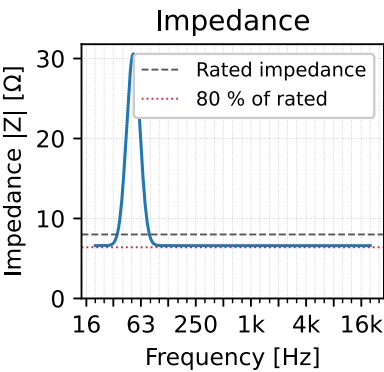

Characteristic sensitivity **87.1 dB** (1 W / 1 m); effective frequency range **37–21361 Hz**

■ The results relate only to the tested specimen.
Generated by phonometry.