

Noise-induced hearing loss prediction

Statistical prediction of the noise-induced permanent threshold shift of a noise-exposed population per ISO 1999:2013 (clause 6.3).

Company: Example fabrication works


Worker(s) / group:

Welders (homogeneous exposure group, 4 workers)

Workplace: Steel assembly hall, line 2

Threshold shift by frequency

Frequency [Hz]	N_{50} [dB]	NIPTS [dB]
500	0.0	0.0
1000	0.1	0.1
2000	4.1	7.7
3000	10.2	16.2
4000	12.9	17.8
6000	8.5	13.6

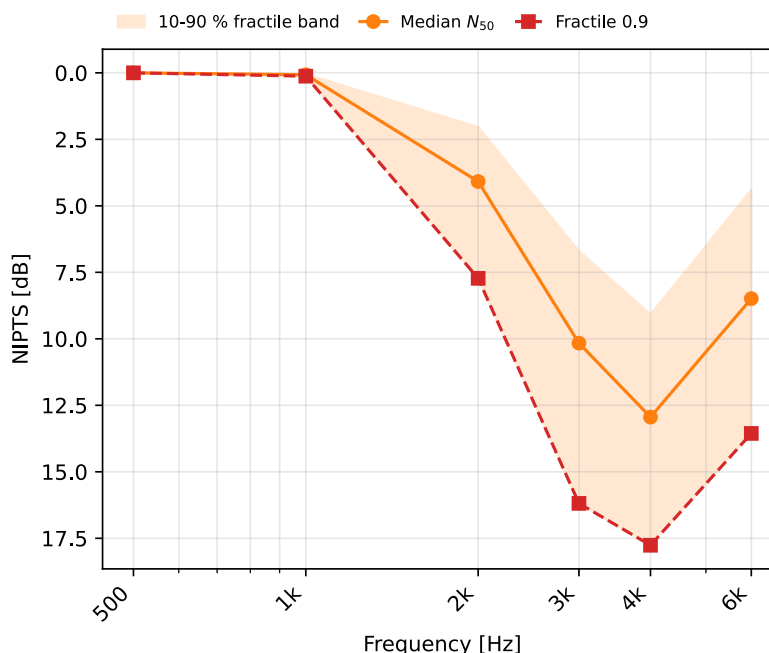

Predicted NIPTS averaged over 2/3/4 kHz =
13.9 dB

Noise exposure $L_{EX,8h} = 90$ dB
Exposure duration = 20 years
Population fractile $Q = 10$ % (fraction with worse hearing)

These values are a statistical prediction for a noise-exposed population (ISO 1999:2013), not a clinical diagnosis or a measured audiogram of any individual.

Q is the percentage of the noise-exposed population predicted to show a larger (worse) value than the one stated, as ISO 1999:2013 defines it (6.3.2, Formulae (4) and (5)); $Q = 10$ % is the most-susceptible tenth.

ISO 1999:2013 does not specify frequencies or frequency combinations for evaluating hearing disability (Scope, NOTE 1); the 2/3/4 kHz average shown is a commonly used descriptor whose choice is left to the user.

■ The results are a statistical prediction for the stated population and exposure conditions; they do not describe any individual person.
Generated by phonometry.