


Dynamic transfer stiffness of a resilient element

Determination of the dynamic transfer stiffness $k_{2,1}$ of a resilient element by the direct method (ISO 10846-2:2008) (ISO 10846-1:2008, 3.7).

Description: Rubber vibration isolator

Transfer-stiffness characteristics

Method	direct method (ISO 10846-2:2008)
Frequency range f [Hz]	20 to 2000
Low-frequency $ k_{2,1} $ [MN/m]	1.00
Low-frequency L_k [dB re 1 N/m]	120.0
Loss factor η (low frequency)	0.010

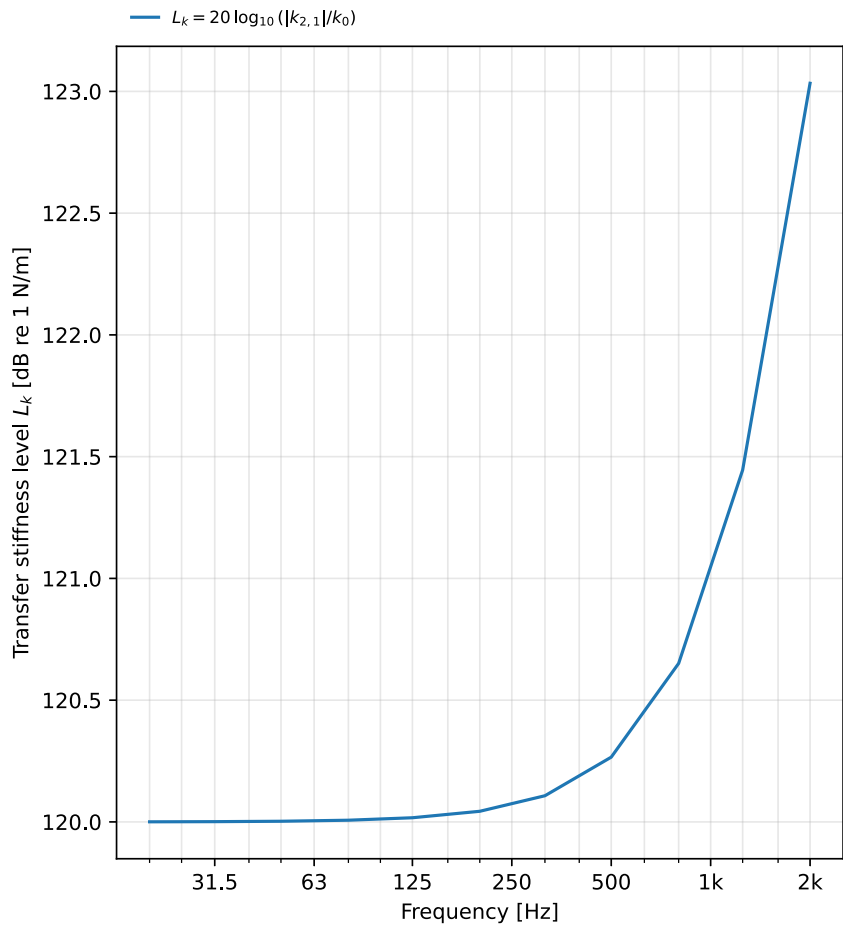

Low-frequency dynamic transfer stiffness level
 $L_k = 120.0$ dB re 1 N/m

Low-frequency stiffness $|k_{2,1}| = 1.00$ MN/m at 20 Hz
Method: direct method (ISO 10846-2:2008)
Loss factor $\eta = 0.010$ (low frequency)

■ The results relate only to the tested specimen.
Generated by phonometry.