


Mechanical mobility measurement

Measurement of the driving-point mechanical mobility $Y = v/F$ over frequency (ISO 7626-1:2011 frequency-response function; measurement per ISO 7626-2:2015).

Description: Machine support bracket (driving point)

Mobility FRF characteristics

FRF type	driving-point
Frequency range f [Hz]	50 to 500
Peak frequency f [Hz]	50.0
Peak mobility $ Y $ [m/(N·s)]	0.00166
Phase at peak [°]	-90

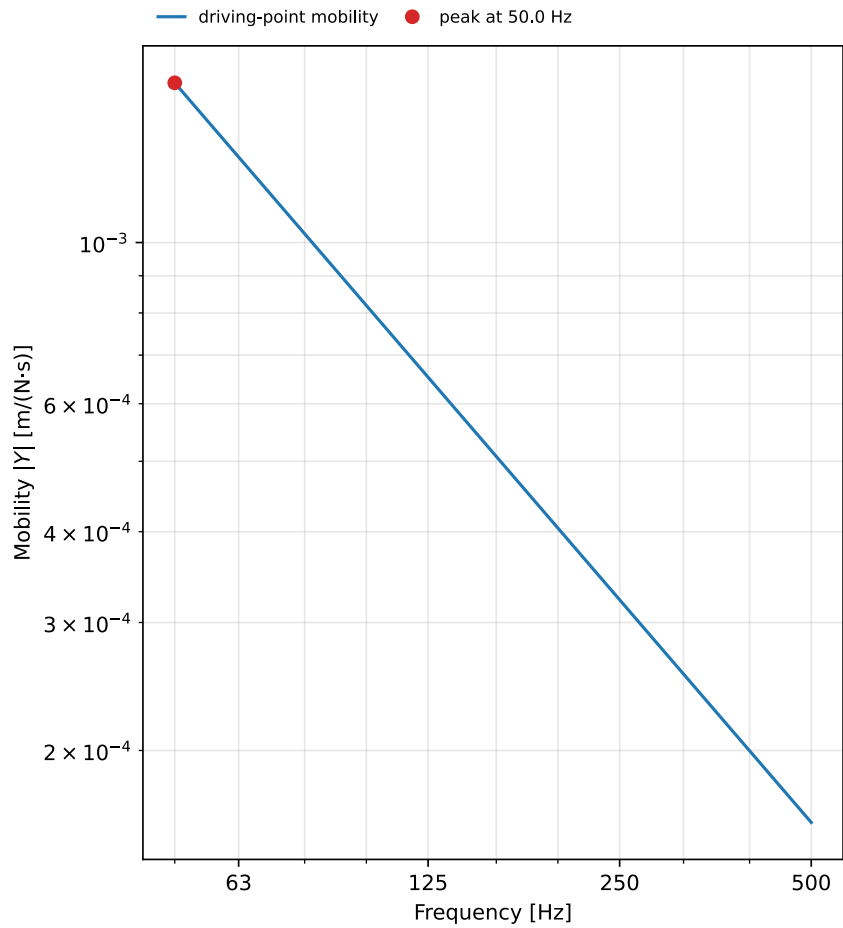

Peak mobility $|Y| = 0.00166 \text{ m/(N·s)}$ at 50.0 Hz

FRF type: driving-point
Frequency range: 50 to 500 Hz
Phase at peak: -90°

■ The results relate only to the tested specimen.
Generated by phonometry.