


Programme loudness compliance

EBU R 128 programme loudness. Rating per EBU R 128 / ITU-R BS.1770-5 (K-weighting, gated).

Client:	Example broadcaster	Programme:	Reference tone sequence (-20 / -30 dBFS steps)
Manufacturer:	Example post-production	Test room:	Reference monitoring room (example)
Date of test:	2026-07-20		

Compliance summary

Metric	Measured	Target / Limit	Result
Integrated (Programme) Loudness	-22.6 LUFS	-23.0 LUFS ±0.5 LU (Δ +0.4 LU)	PASS
Maximum True Peak	-20.0 dBTP	≤ -1.0 dBTP	PASS
Loudness Range (LRA)	10.0 LU	informational	—
Max Momentary	-20.0 LUFS	informational	—
Max Short-term	-20.0 LUFS	informational	—

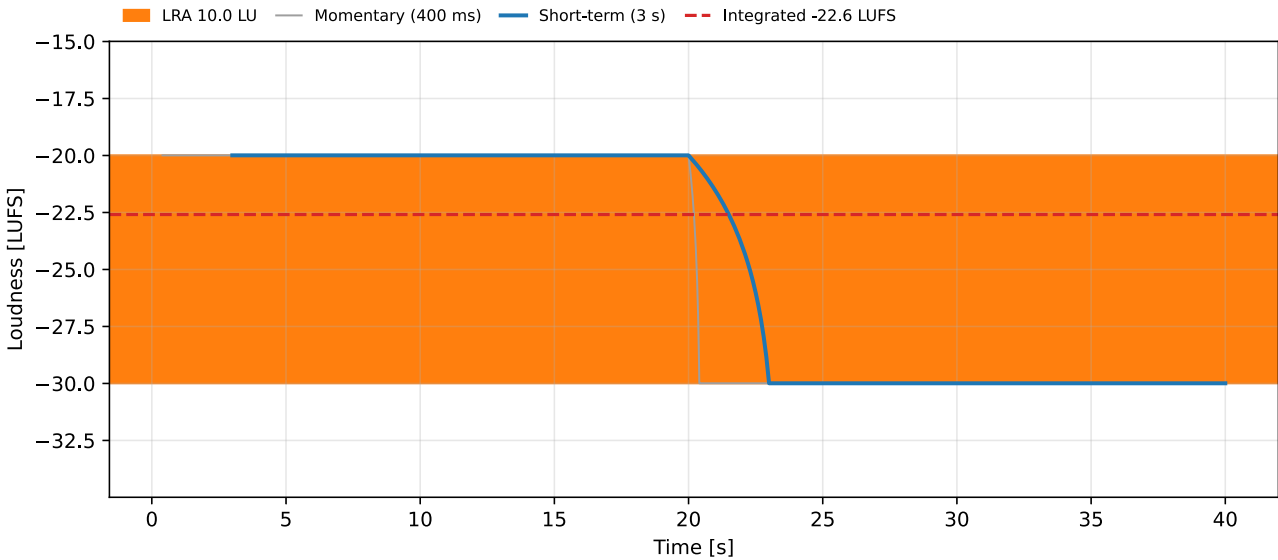

I = -22.6 LUFS (LRA = 10.0 LU, max TP = -20.0 dBTP)

Result vs requirement: Compliant when I is within -23.0 ±0.5 LU and true peak ≤ -1.0 dBTP → **PASS**

Gating -70 LUFS absolute / -10 LU relative (ITU-R BS.1770); 1 LU = 1 dB; true peak per EBU Tech 3341; LRA per EBU Tech 3342 (not recommended for programmes under 60 s).

Laboratory: Phonometry reference example

Report no.: EXAMPLE-R128

Date: 2026-07-20

Operator: phonometry Signature: _____

■ The results relate only to the tested specimen.

Generated by phonometry.