
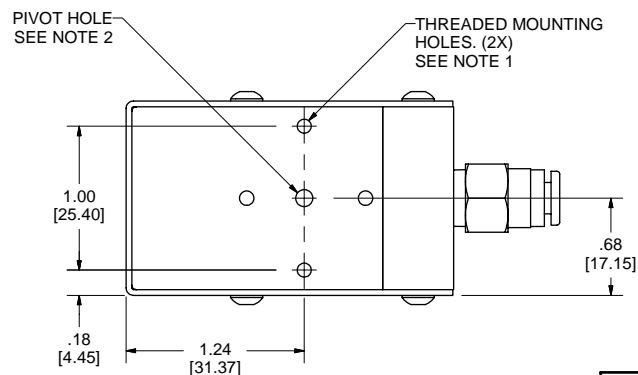
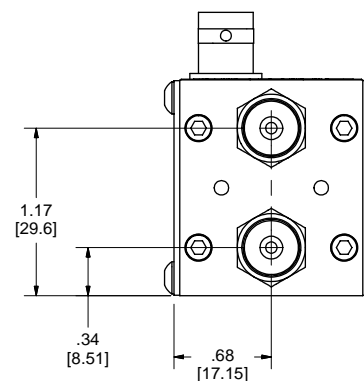
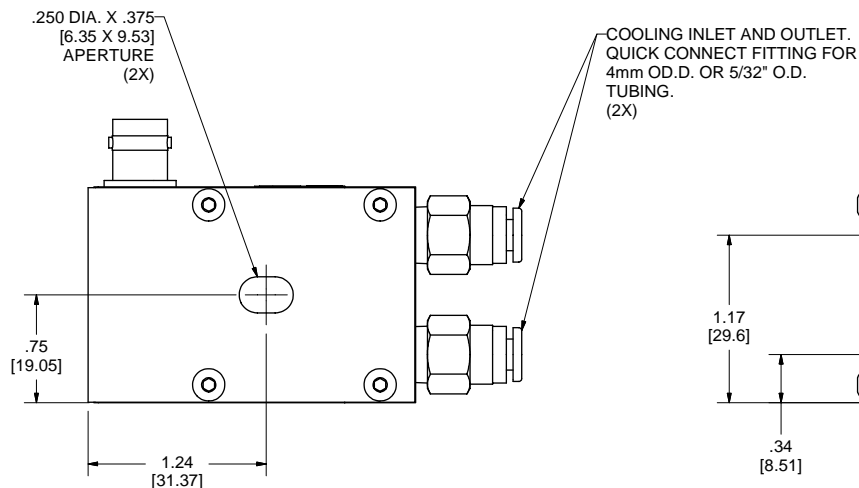



REVISIONS		
ISSUE	DESCRIPTION	APPD/DATE
ORIGINAL	TAL 03-30-06	

ALL REVISIONS TO THIS DRAWING  
MUST BE MADE ON THE AUTODESK CAD SYSTEM



#### NOTES:

1. MOUNTING HOLES FOR ATM-DA6 ARE STANDARD #4-40 X .37 DEEP. (2X)  
MOUNTING HOLES FOR ATM-DA6M ARE METRIC M3x.9 X 9.5mm DEEP. (2X)
2. PIVOT HOLE FOR ATM-DA6 IS .094 DIA. X .37 DEEP.  
PIVOT HOLE FOR ATM-DA6M IS 3mm X 9.5mm DEEP.

UNLESS OTHERWISE SPECIFIED TOLERANCES AND DIMENSIONS ARE IN INCHES LINEAR : .XX ± .010 .XXX ± .005 ANGULAR ± ° DIAMETERS ± LIMITS MAY APPLY BEFORE FINISHING DO NOT SCALE THIS PRINT		APPROVED DATE	 <b>IntraAction Corp.</b> 3719 WARREN AVE. PHONE (708) BELLWOOD, IL 60104 547-6644	
		CHECKED DATE		
MATERIAL		DRAWN DATE	<b>ATM-DA6</b> <b>ATM-DA6M</b> <b>SERIES OUTLINE</b>	
MFG. INSTR.		TAL 03-30-06		
Q. C. INSTR.		FINISH	FCSM NO.	ISSUE
			C SIZE	ATM-DA6 (DA6M)
			SCALE 1.5 : 1	SHEET 1 OF 1

DWG NO. ATM-DA6 (DA6M) SH 1