
		Murphy-PFFS	-SP	00L-	-BOM	1	
Mark	Qty	Description	End 1	End 2	Lft	LDec	Size
6	2	Style 107 EHP Pnt QuickVic Rigid Coupling					4
5	1	GRV DI MSTRSL W/MEM STP G/O BFLY VLV					4
1	1	Std Wt SA234 WPB CS BW LR 90 Deg Ell					4
3	1	Sch 40 SA-53B CS ERW Pipe PE	Grooved End	BEV	2'-9 1/16"	33.060	4
4	1	Sch 40 SA-53B CS ERW Pipe PE	BEV	Grooved End	4'-1 13/16"	49.817	4

		Murphy-PFFS	-SP	00L-	-BOM	1	
Mark	Qty		End 1	End 2	Lft	LDec	Size
6	2	Style 107 EHP Pnt QuickVic Rigid Coupling					4
5	1	GRV DI MSTRSL W/MEM STP G/O BFLY VLV					4
1	1	Std Wt SA234 WPB CS BW LR 90 Deg Ell					4
3	1	Sch 40 SA-53B CS ERW Pipe PE	Grooved End		,	33.060	
4	1	Sch 40 SA-53B CS ERW Pipe PE	BEV	Grooved End	4'-1 13/16"	49.817	4

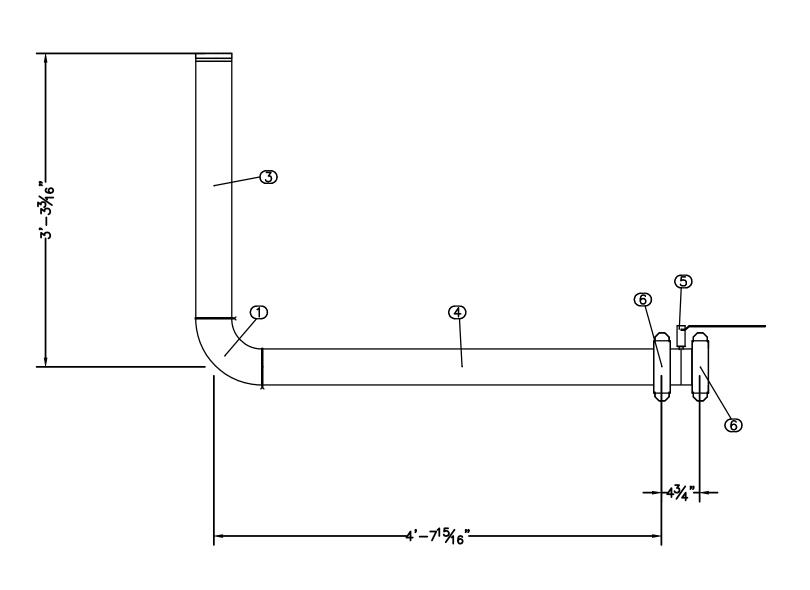

CONSTRUCTORS -ENGINEERS MECHANICAL - INDUSTRIAL

1233 N. Price Rd.
St. Louis, MO 63132-2303
314-997-6600 phone

	APP	¥	ORN N	
om				
-stl.c		WPS#	MURPHY W	ž
phy-		COMMENTS	8	
mur			ICATION	$\overline{\circ}$
CAD@		<u></u>	<b>IH'D TIGHT</b>	Ξ
BIM			-ATION	[<
		T/ORIENTATION	ORIENT	ĭ

	Ī				l		
Ξ	CNIC		A/QC/	QA/QC ACCEPT	FLANG	FLANGE WEIGHT/ORIENT,	<b>DRIENT</b> ,
Ī	) :				FITTIN	FITTING ORIENTATION	TION
					BOLTS	BOLTS/CPLG'S/TH'D TIGH'	'D TIGH
					SPOOL	SPOOL IDENTIFICATION	ATION
		SPEC.	ASME		X-RAY HYDRO TEST	PWHT	8
		Ą	<b>2</b>	Ą	Ą	AN AN	MIRPHY WP
Ī		5					
	ş (	0					
	<b>)</b>	700	NATE	JOEC	NCECIONAL		Nac

NRB CUP LVL02 SPOOLS
JOH AWIJ
Г
ON/1HS

<u>s</u>	SERVICE NAME		
WG.		E C C	>
IG NO./TRACKING NO.	QIY.	胀	ᅮ
140-A-UPL2-26-5	ىن 	_	