
Mark	Qty	Description	End 1	End 2	Lft	LDec	Size
9	1	Std Wt SA234 WPB CS BW CONC RED					14x1
8	1	Style W07 Rigid Coupling					14
12	1	77C-140 Brz 2pc FP SS-Vntd-B&S Ball Valve Thd					3/4
14	1	No.647 TT Dielectric Transition Fitting					3/4
2	1	Std Wt SA234 WPB CS BW LR 90 Deg EII					10
6	1	Std Wt SA234 WPB CS BW 45 Deg Ell					10
1	1	3000# FS Thread-0-Let			1 5/16"	1.313	1x1(
13	1	3000 ∦ FS Thread-0-Let			1 1/16"	1.063	3/4x
5	1	Sch 40 SA-53B CS ERW Pipe PE	BEV	BEV	1'-0 7/16"	12.441	10
11	1	Sch 40 SA-53B CS ERW Pipe PE	BEV	BEV	1'-10 3/8"	22.375	10
7	1	Std Wt SA-53B CS ERW Pipe PE	Grooved End	BEV	6"	6.000	14
4	1	Sch 40 SA-53B CS ERW Pipe PE	BEV	Grooved End	6"	6.000	10

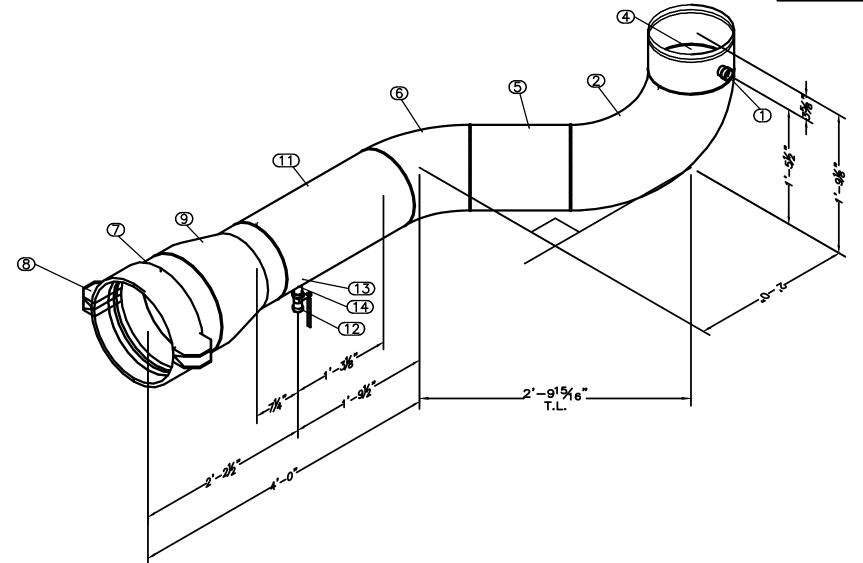

MU	RP	HY
		SINCE 1907

CONSTRUCTORS • ENGINEERS MECHANICAL • INDUSTRIAL

1233 N.	Price	Rd.	
St. Louis	, MO	63132-2	30.
314-99	7-66	00 phone	Э
		ohy-stl.c	
		,	

2021	WISK	IISM RFS	SFARCH RIII DING		QA/QC ACCEPT	CEPT	FLANG	E WEIGHT	FLANGE WEIGHT/ORIENTATION	
		<u> </u>	בויס כויס פני	_			FITTING	FITTING ORIENTATION	ATION	
		Z '	IRB CUP				BOLTS/	CPLG'S/T	BOLTS/CPLG'S/TH'D TIGHT	
			oz spools	•			COde	SPOOL IDENTIFICATION	NOITA	С
		14145		T)]
	SERVICE I			SPEC.	. ASME	X-RAY	X-RAY HYDRO TEST PWHT	PWHT	COMMENTS	
		ב כ	サード しゅうしょう りゅうしょう	1						
			<i>n</i> =	W	¥N	¥	¥	¥	NA MURPHY WPS#	
ا									W	
•	20	QI₹.	SHI/NO REV	0						
) -7-	07_0	_	- I III I	REV	REV DATE	DES	DESCRIPTION		DRN CHK APP	APP