



### Towing with a wheel-lift type truck

### From the front

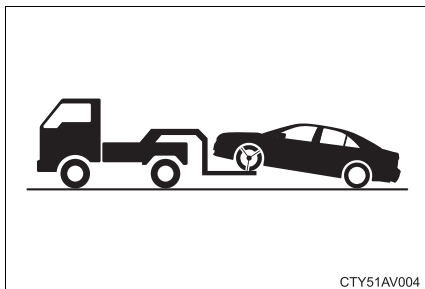


Release the parking brake.

### From the rear

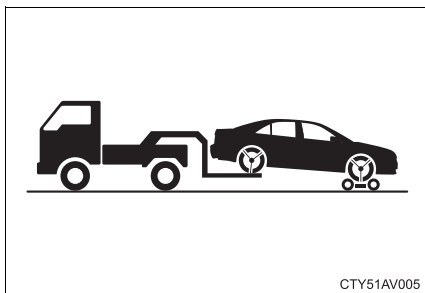

Use a towing dolly under the front wheels.

### Using a flatbed truck

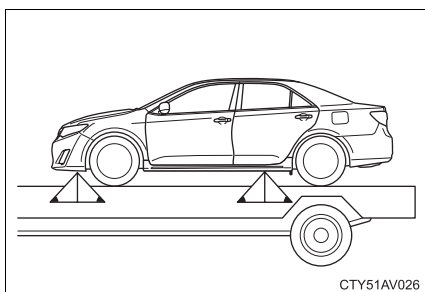

If you use chains or cables to tie down your vehicle, the angles shaded in black must be 45°.

Do not overly tighten the tie downs or the vehicle may be damaged.