


**STEP 3**

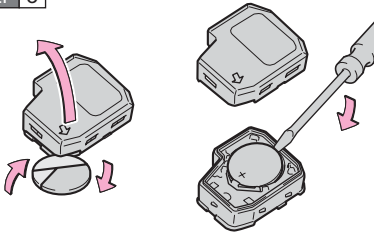


CTY43AV194

Open the case cover using a coin protected with tape etc. and remove the depleted battery using a small flathead screwdriver.

Insert a new battery with the “+” terminal facing up.

■ **Replacing the battery (vehicles with a smart key system)**


**STEP 1**



CTY43AV326

Take out the mechanical key.

**STEP 2**

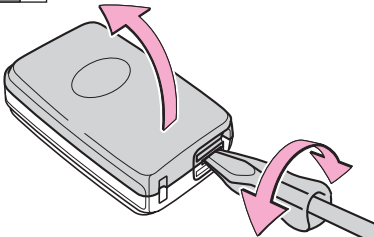

CTY43AV029

Remove the cover.

To prevent damage to the key, cover the tip of the screwdriver with a rag.