



Remove the fender liner clip.

- 1** After turning the clip, pull the clip until it stops.
- 2** Turn the clip again, and then pull out the clip.

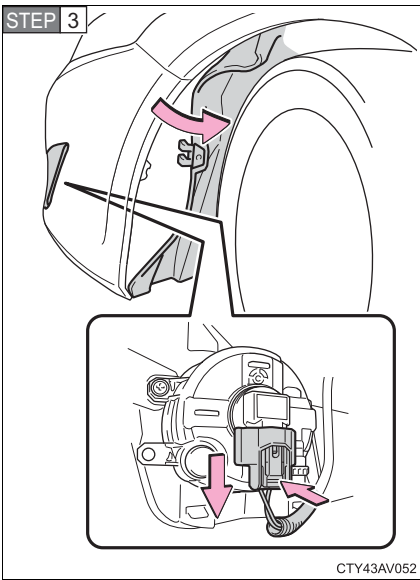

Partly remove the fender liner and unplug the connector while depressing the lock release.

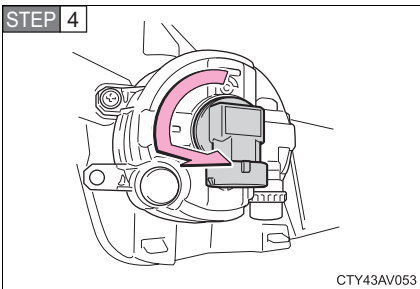

Turn the bulb base counterclockwise.