


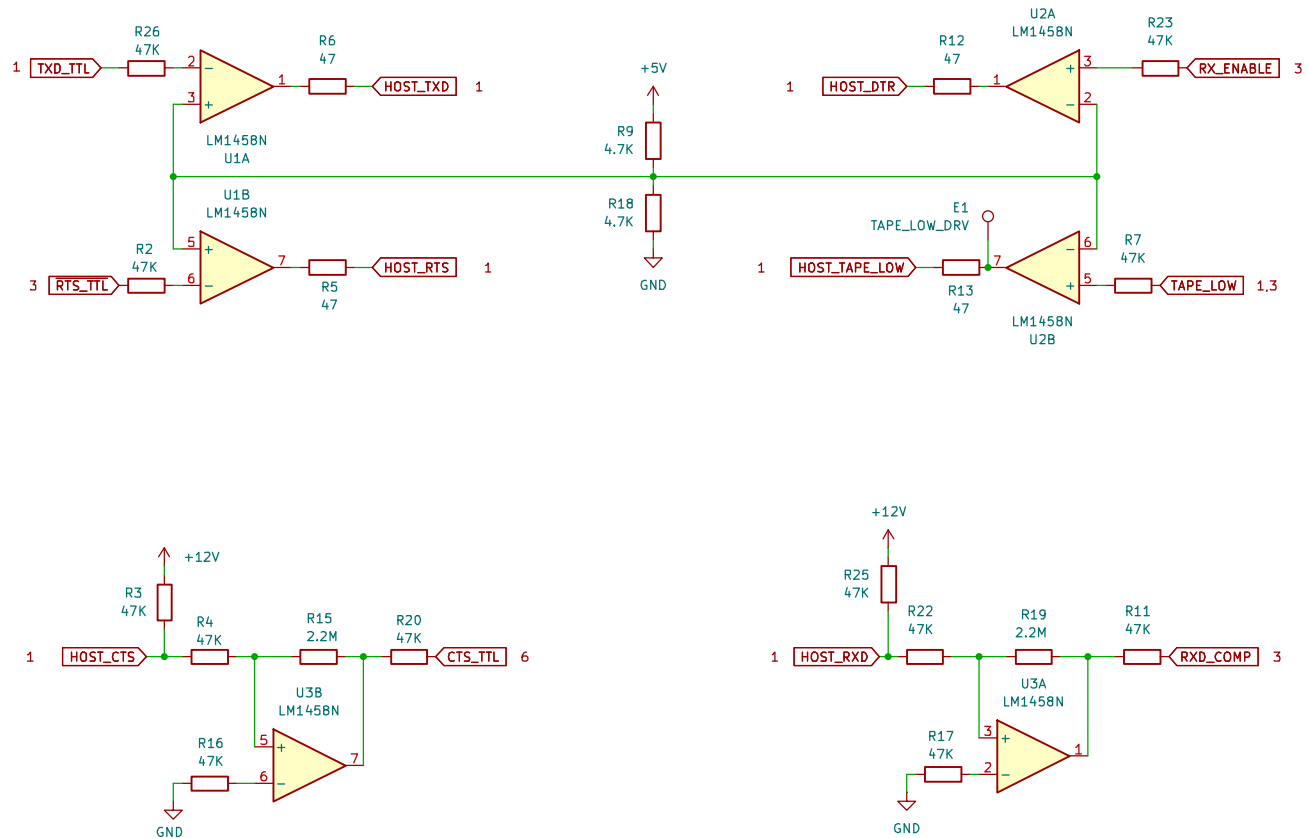

Notes:

- 1) U1B inverts (R2 to pin 6); U2A and U2B do not. RTS asserts on a low input.
- 2) R9/R18 set the 2.5 V reference shared by U1 and U2.
- 3) R3 and R25 bias CTS and RXD to +12 V when the cable is open.

Sheet: /RS-232 Line Interface/
File: RS232LineInterface.kicad_sch


Title: DSI SRP3075 – Serial Interface & Reader Control


Size: USLetter Date: 2026-09-06

Rev: 1.1


Jeremy Pastin


Id: 2/10

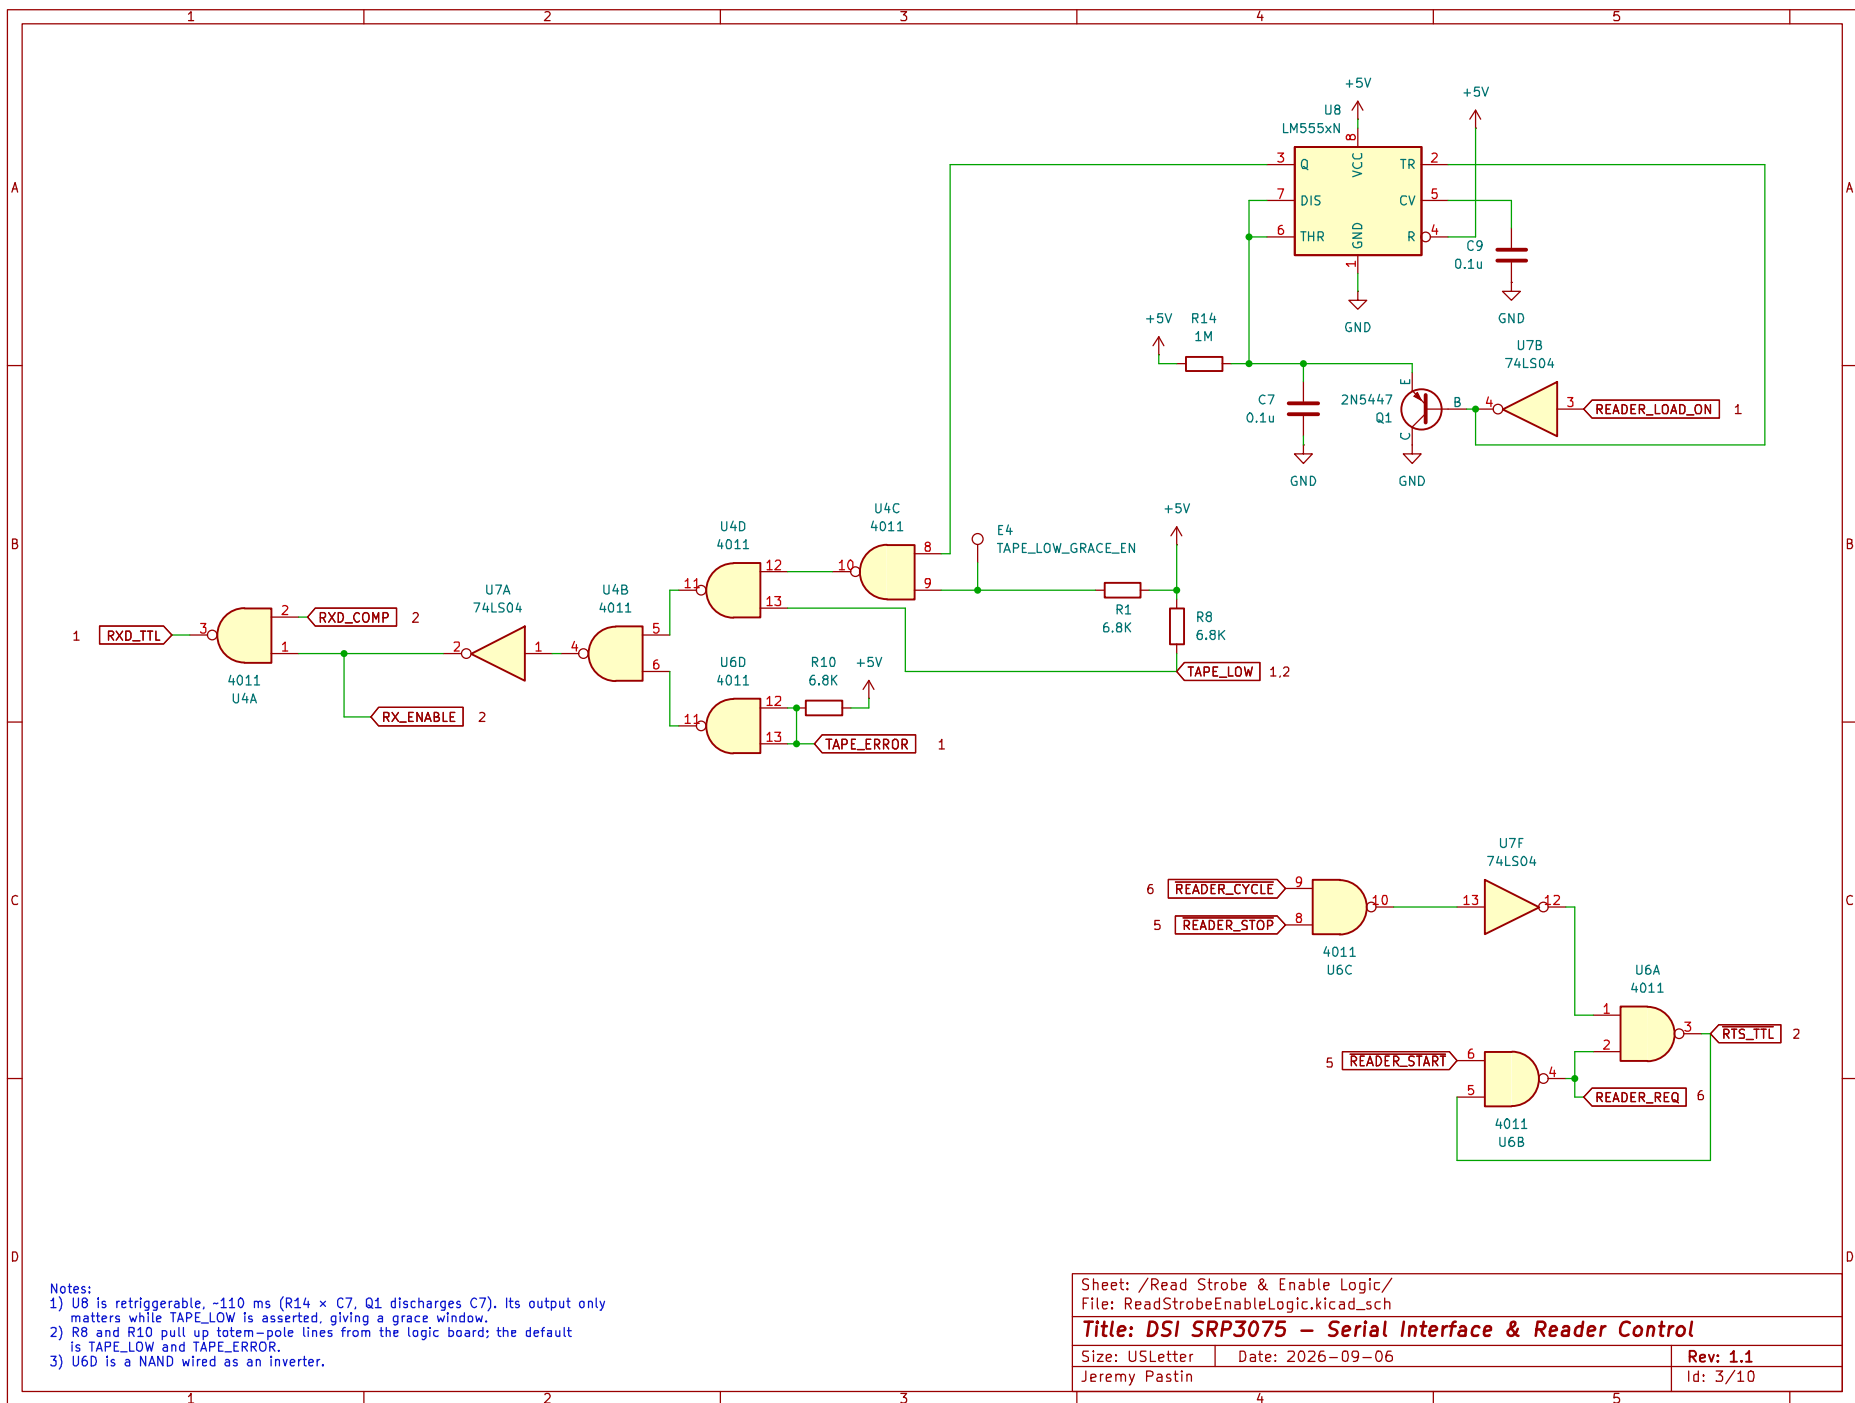


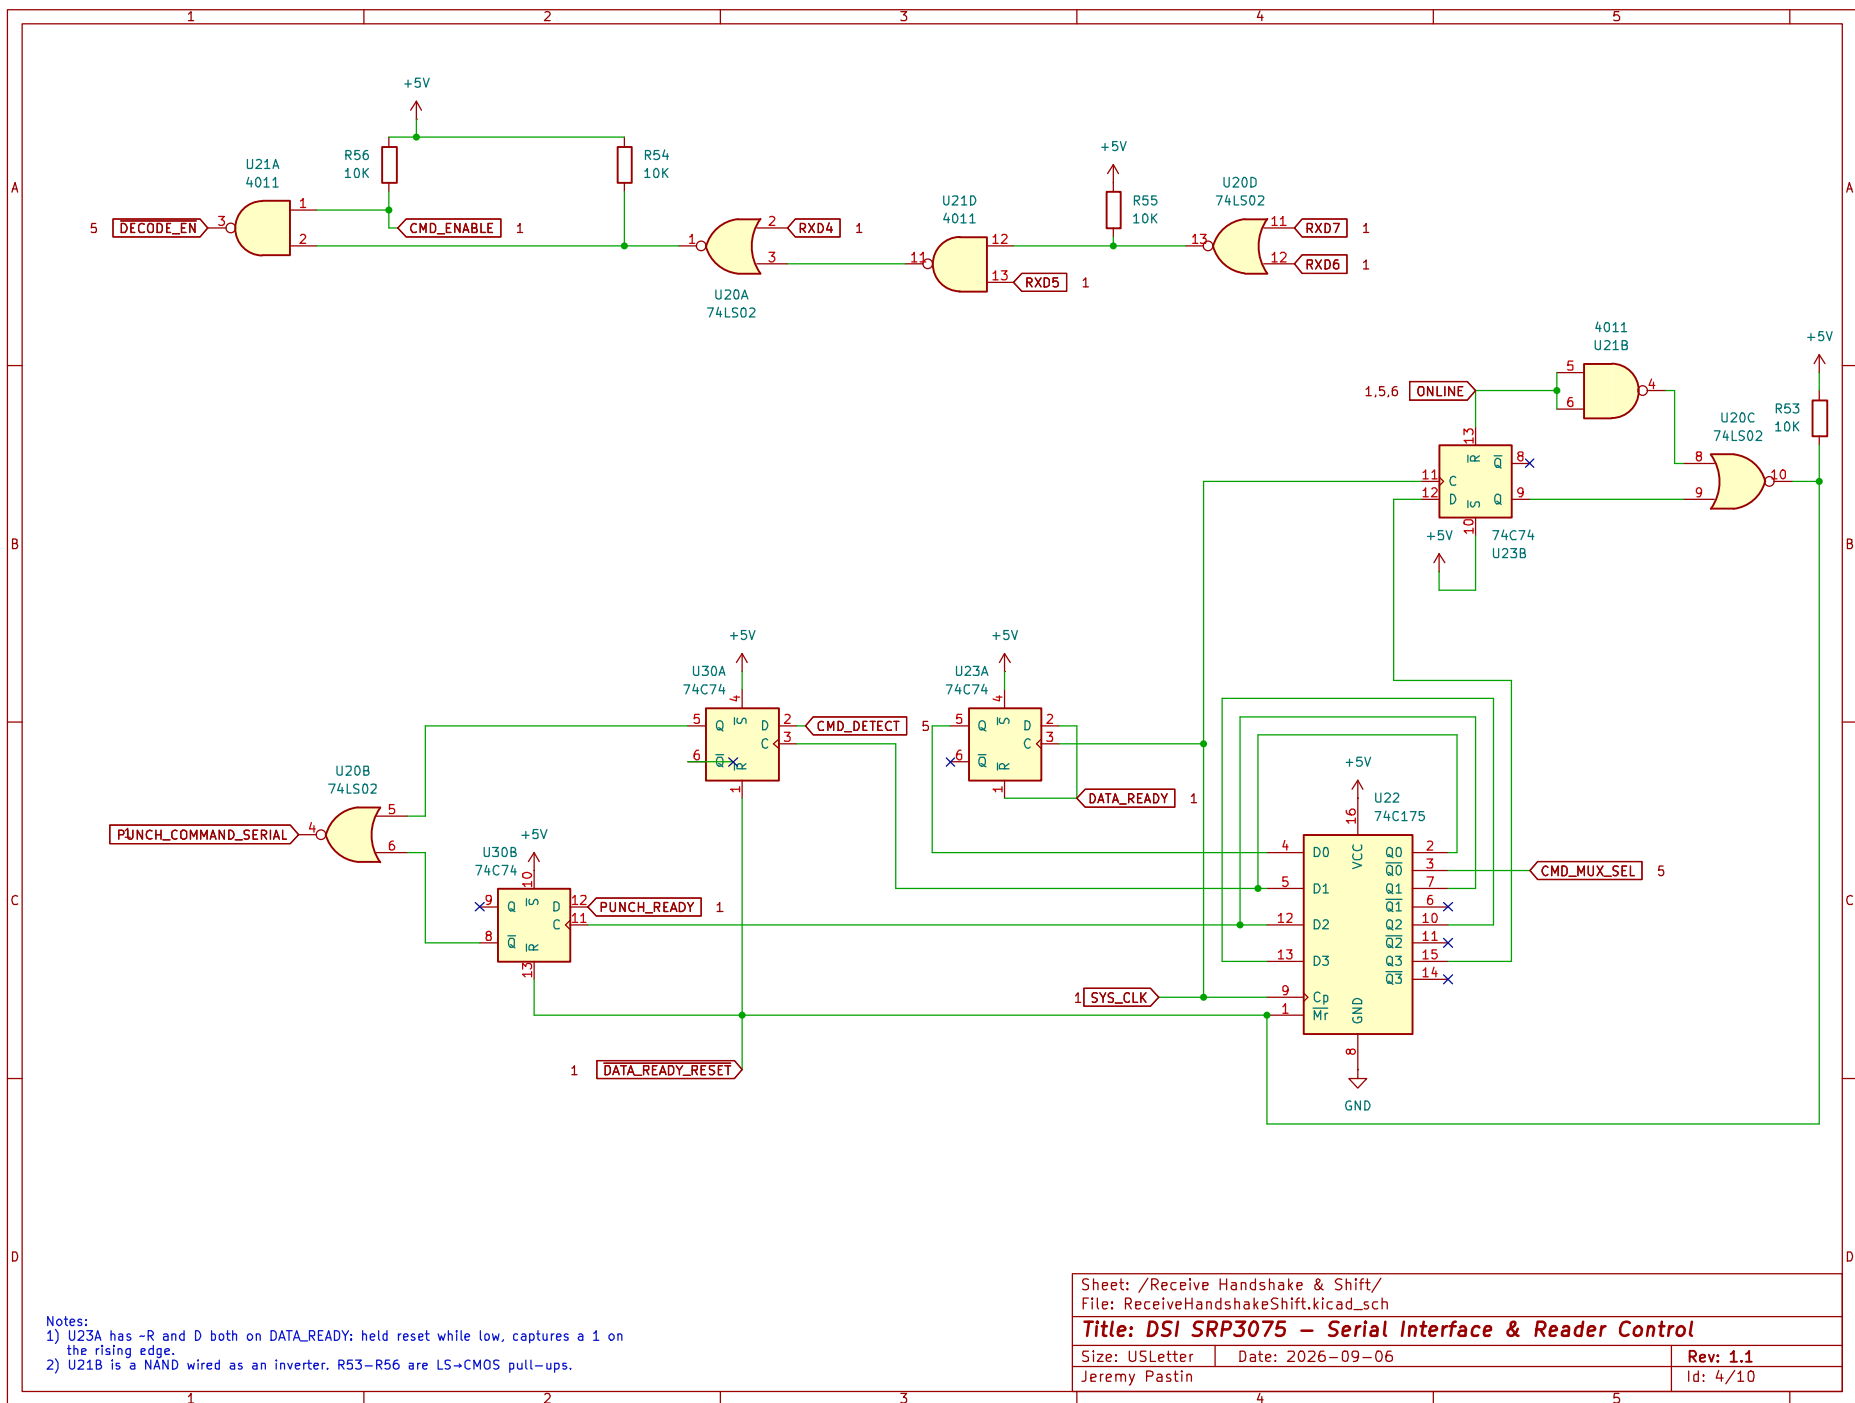


Notes:
 1) U23A has -R and D both on DATA_READY: held reset while low, captures a 1 on the rising edge.
 2) U21B is a NAND wired as an inverter. R53–R56 are LS-CMOS pull-ups.

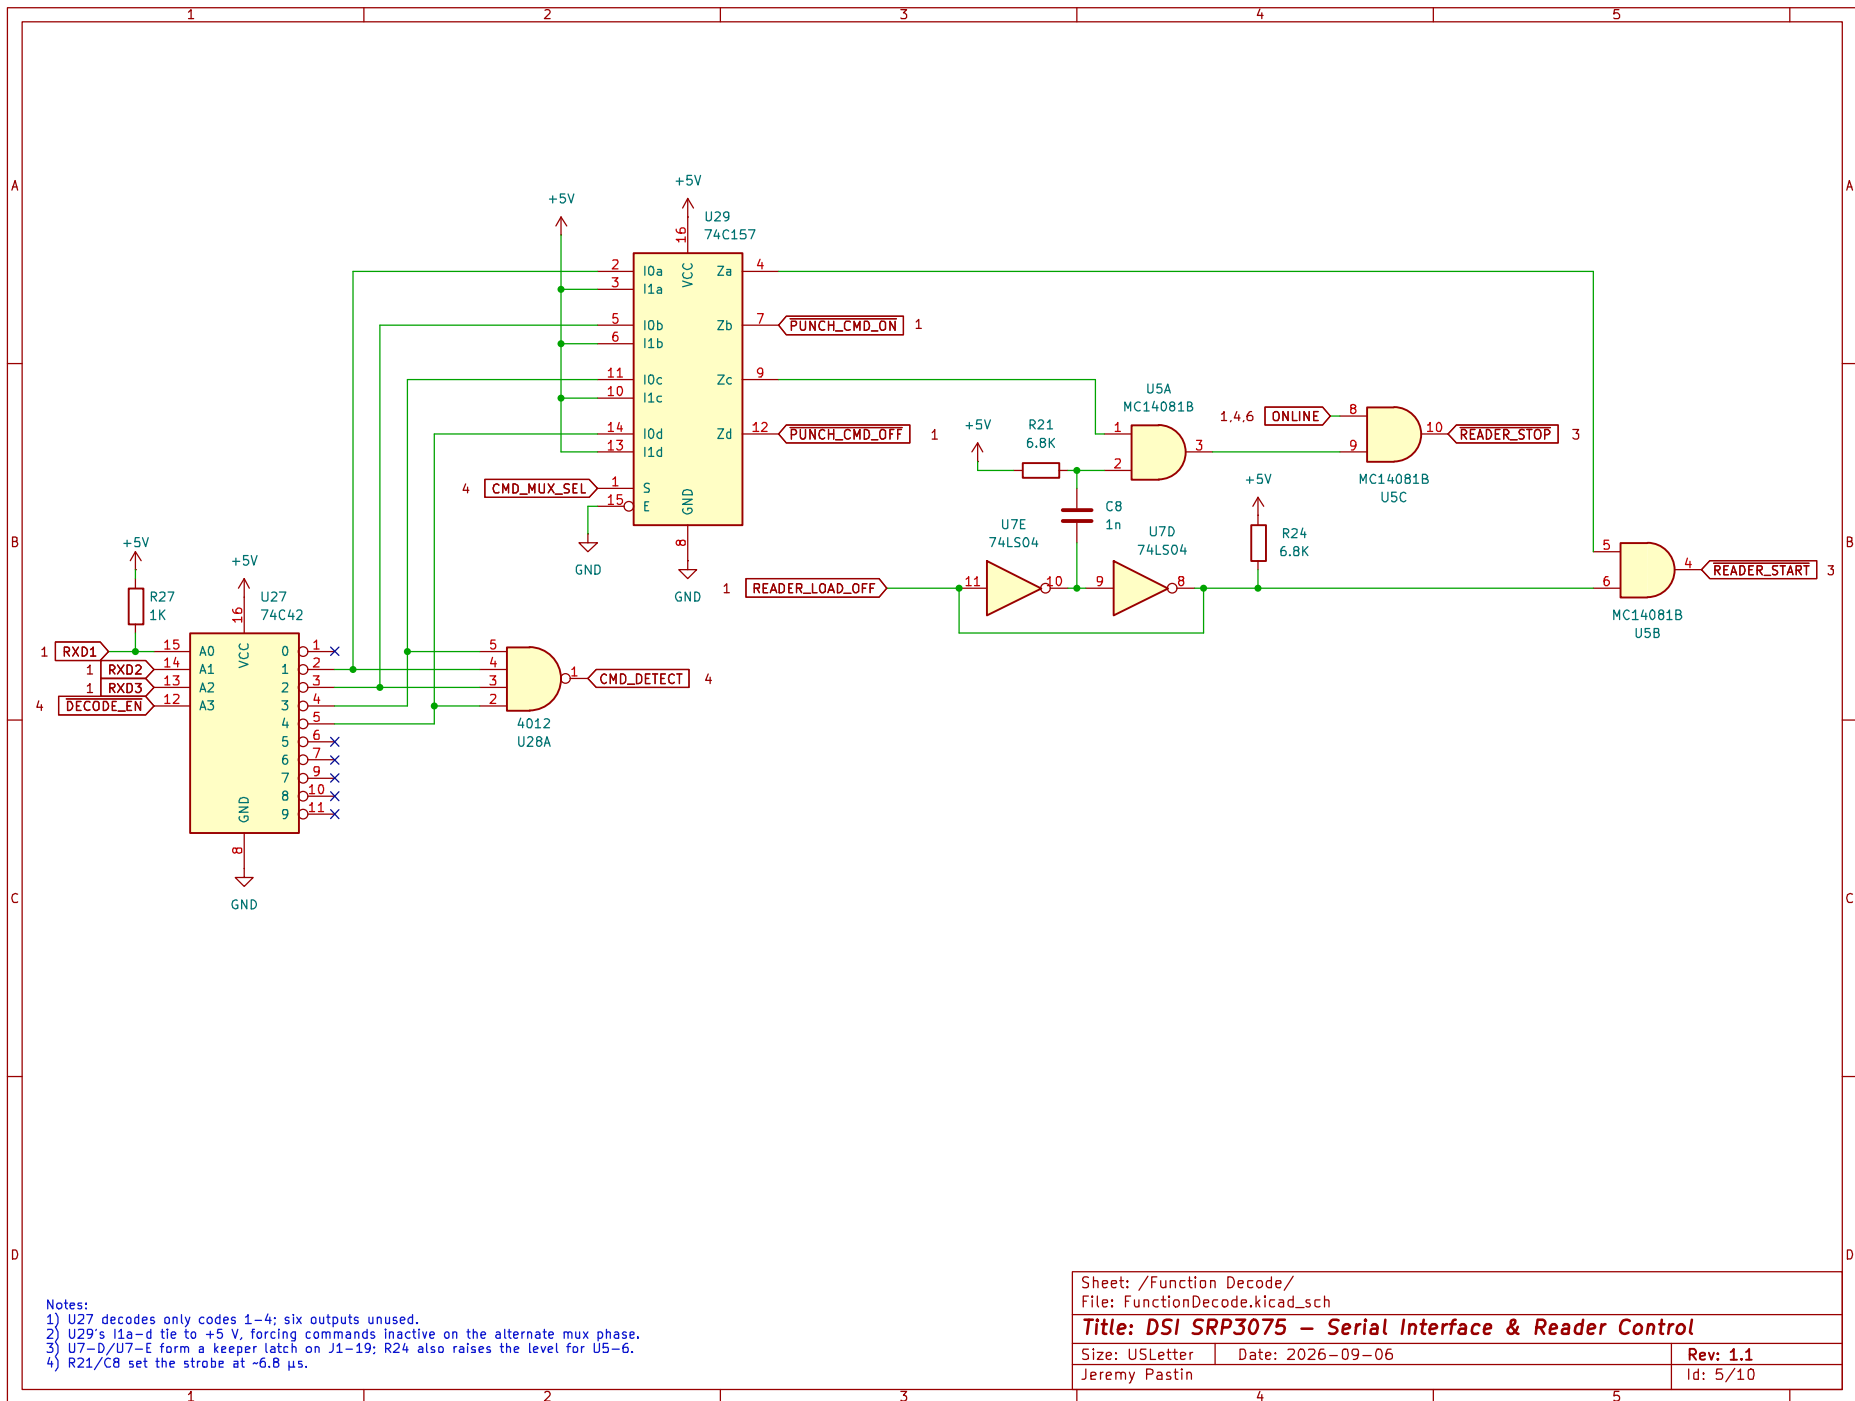

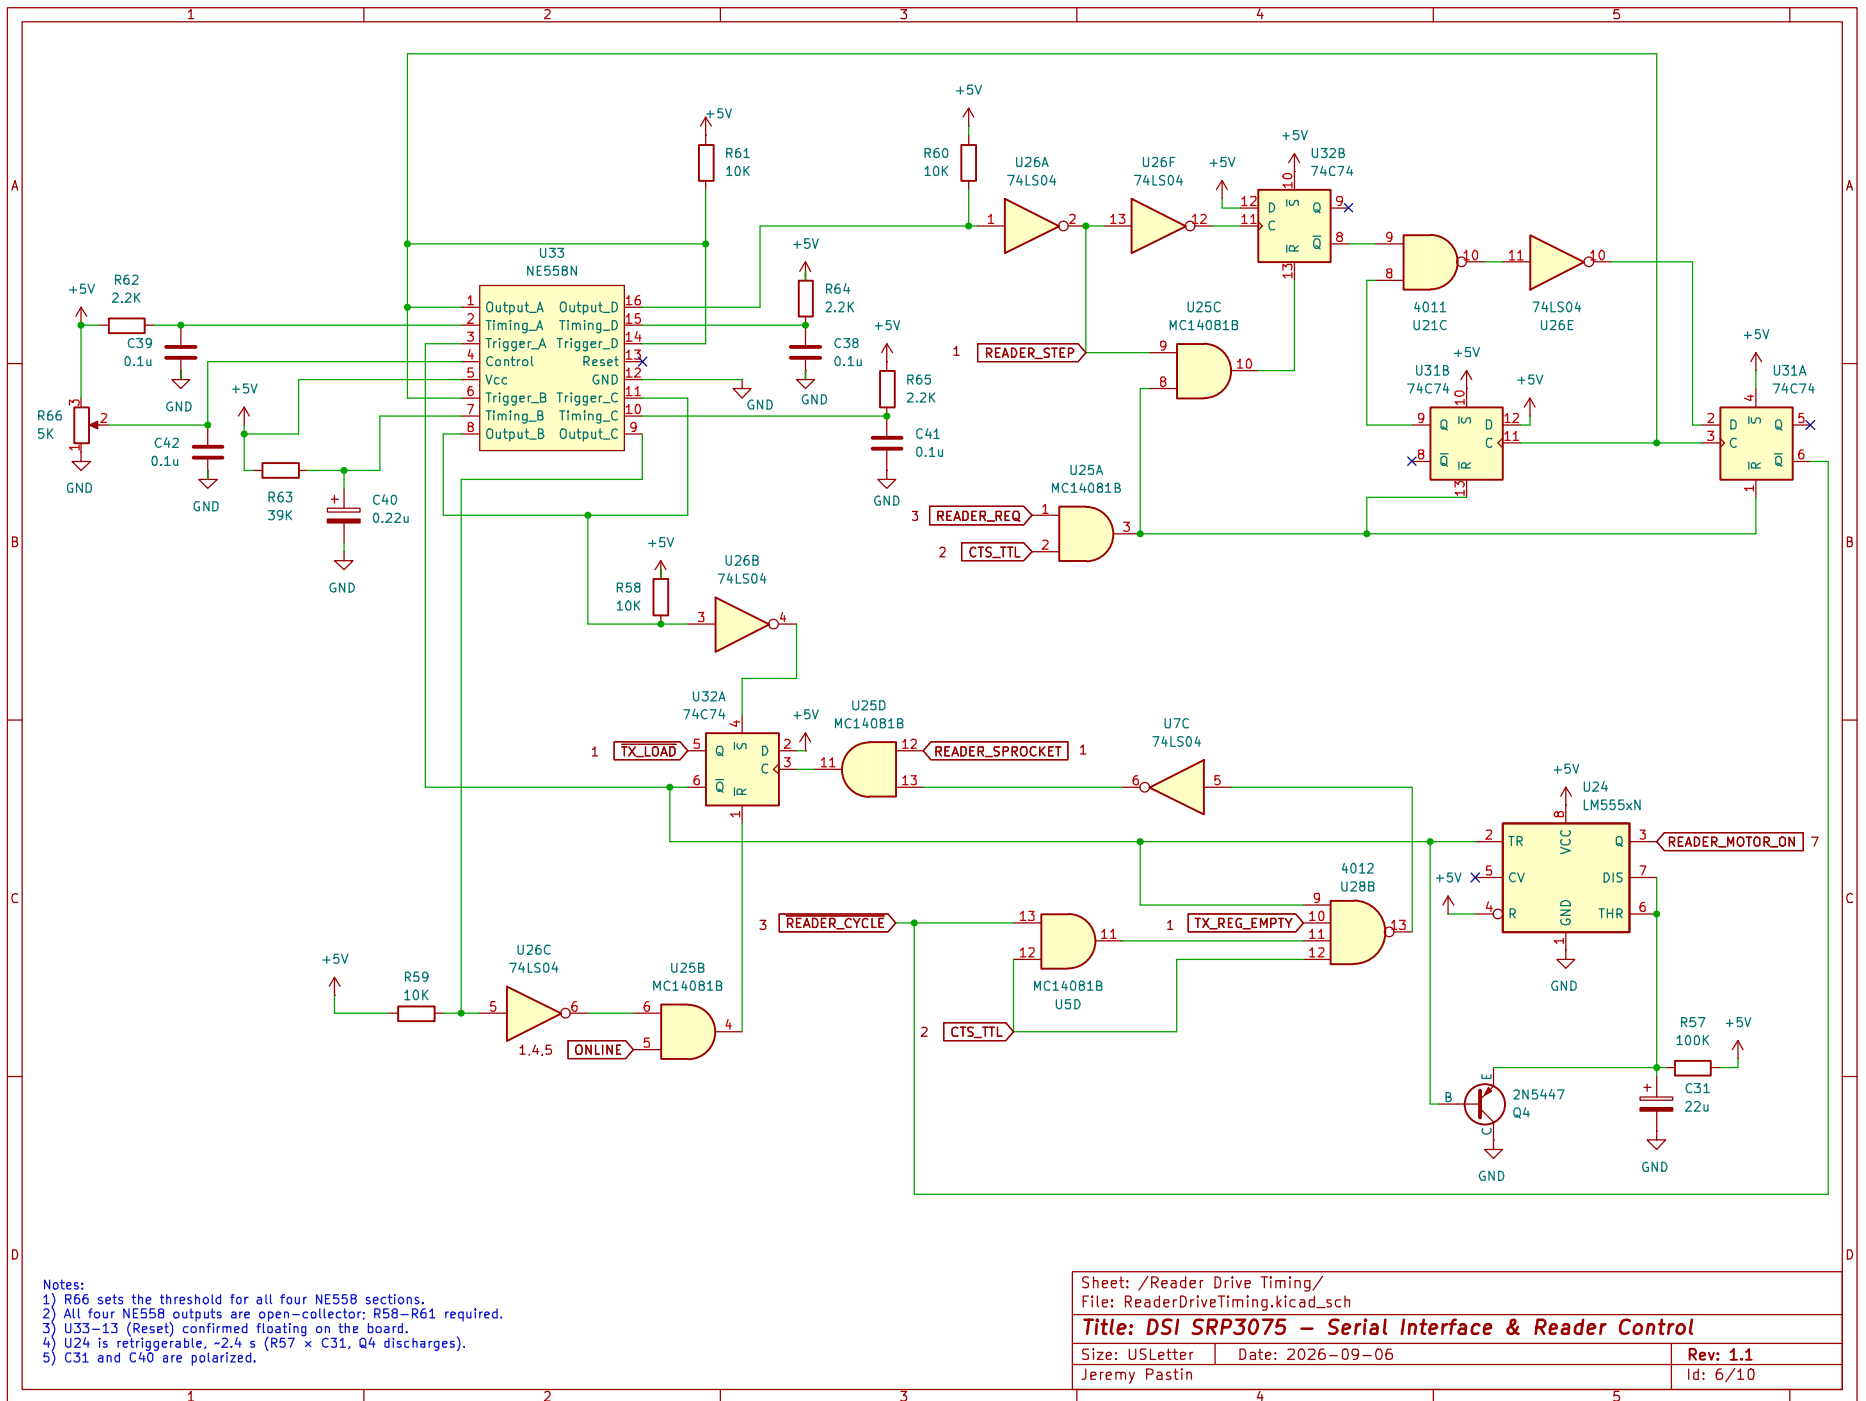

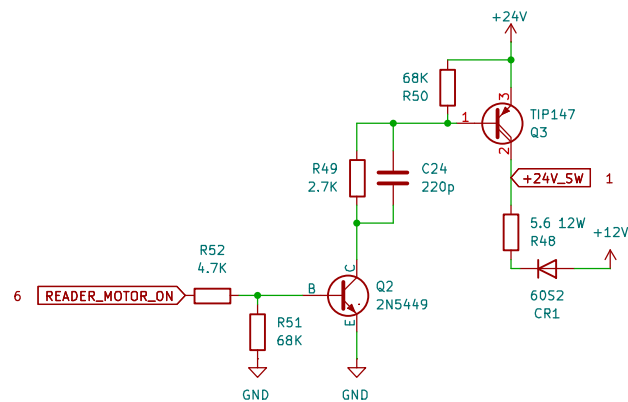

Sheet: /+24V Motor Switch/		
File: 24vMotorSwitch.kicad_sch		
Title: DSI SRP3075 – Serial Interface & Reader Control		
Size: USLetter	Date: 2026-09-06	Rev: 1.1
Jeremy Pastin		Id: 7/10

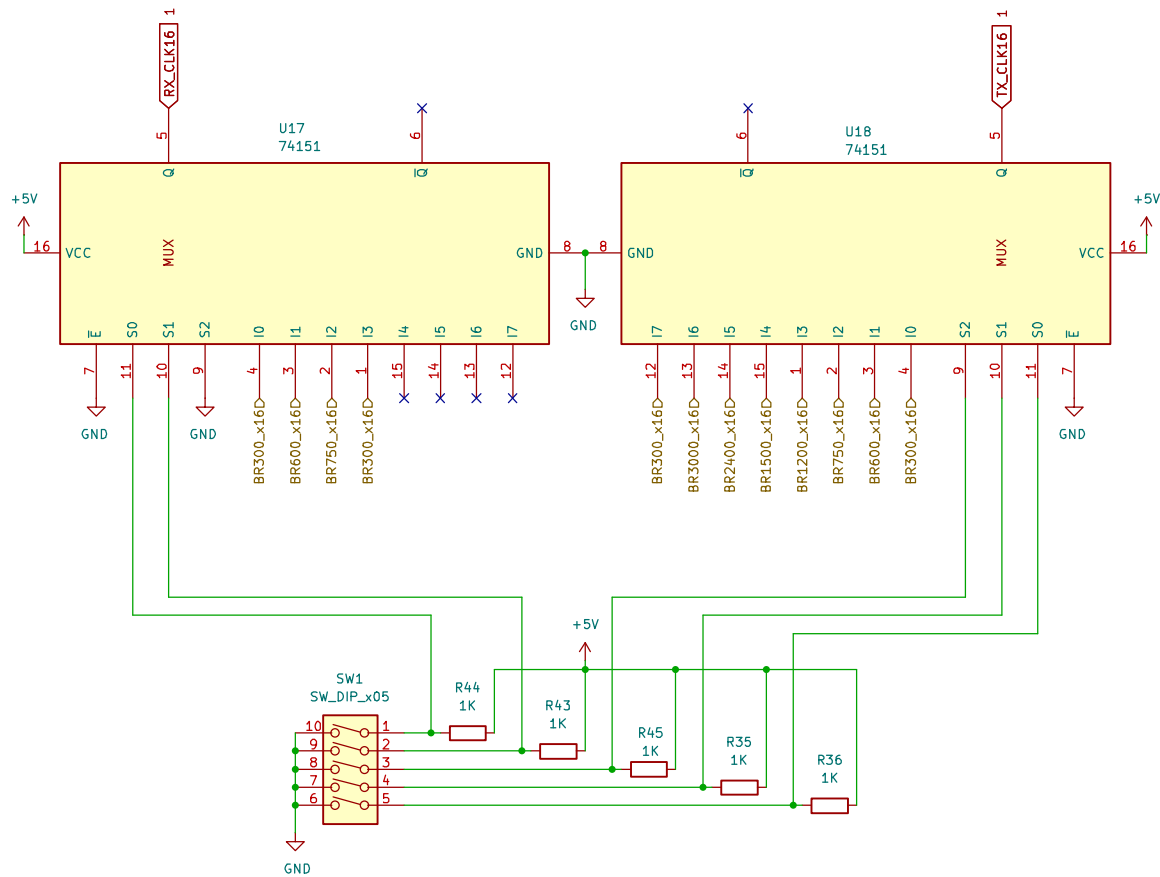

Notes:
 1) SW1 inputs are pulled up when OFF; OFF = logic high, ON = logic low.
 2) U17-S2 grounded, limiting receive to 300/600/750 baud (75 char/sec, punch speed).
 Transmit reaches 3000 baud (300 char/sec, reader speed).

Sheet: /Baud Rate Generation/Baud Rate Selection/ File: BaudRateSelection.kicad_sch		
Title: DSI SRP3075 – Serial Interface & Reader Control		
Size: USLetter	Date: 2026-09-06	Rev: 1.1
Jeremy Pastin		Id: 9/10

