


Mk3 Cabinet — Assembly Measurement Drawing

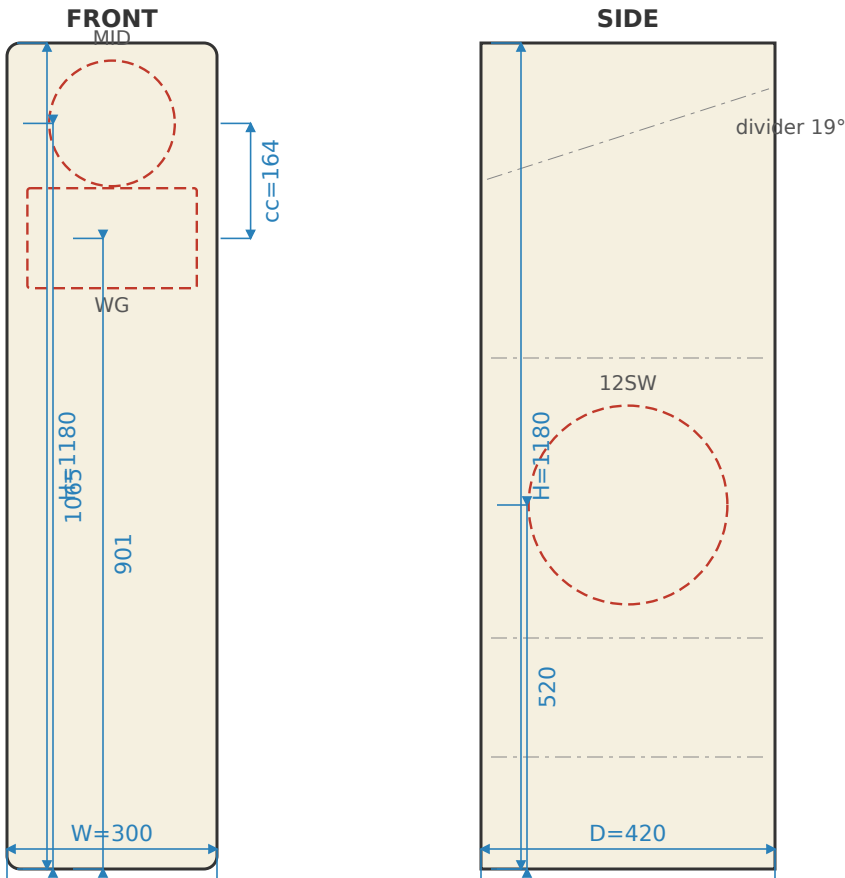

Internal: $256 \times 376 \times 1136$ mm | Wall: 22 mm | Roundover: R19
Driver heights: MID $z=1065$ WG/TW $z=901$ Woofer $z=520$ | C-C mid/tw:
shelf br

Mk3 Cabinet — Panel Cut List

Material: 22 mm birch plywood | External: 300 × 420 × 1180 mm

Panel	Width (mm)	Height/Depth (mm)	Qty	Thickness	Notes
Front baffle	300	1180	1	22	R19 front vertical edges, mid + WG cutouts
Back panel	300	1180	1	22	Square edges
Side panel L	420	1180	1	22	Woofer cutout Ø284, 8×Ø5.5 on Ø319 BCD
Side panel R	420	1180	1	22	Woofer cutout Ø284, 8×Ø5.5 on Ø319 BCD (opposed)
Top panel	300	420	1	22	Square edges
Bottom panel	300	420	1	22	Square edges
Divider plate	300	420	1	22	Tilted 19°, cut to fit cavity
Shelf brace 1	256	376	1	22	Ring shelf, rim 45 mm, z=160
Shelf brace 2	256	376	1	22	Ring shelf, rim 45 mm, z=330
Shelf brace 3	256	376	1	22	Ring shelf, rim 45 mm, z=730

Total panels: 10 | Total panel area: 2.37 m² | Plywood volume: 0.05 L


NOTE: Divider plate and shelf braces are cut to fit the internal cavity (256 × 376 mm). Measure actual internal dims before cutting.

Mk3 Front Baffle — Cutout & Hole Layout

Panel: 1000 x 1180 mm, 22 mm thick
ply, R19 front edges

18W/4424G00 Ø145 cut Ø179 rebate 6xØ5.3


SB26STAC 242x143 recess 4xØ3 pilot

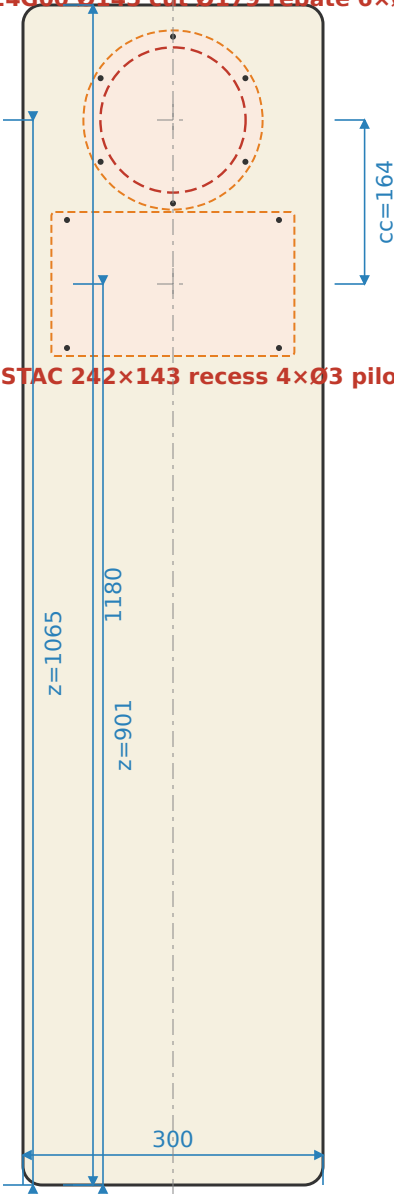

Red dashed: cutout Orange: rebate Dots: pilot Ø3


Mk3 Side Panel — Woofer Cutout & Hole Layout

Panel: 1200 x 1180 mm, 22 mm thick ply (flat, no roundover)

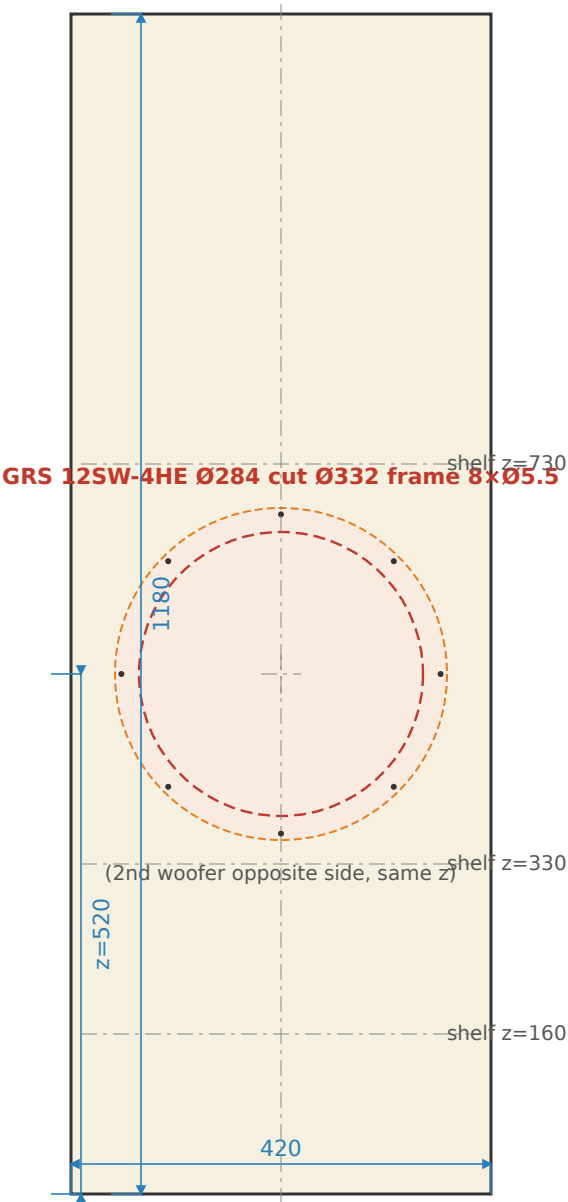


Front Baffle — Cut Drawing

1000 mm, 22 mm ply, R19 front edges

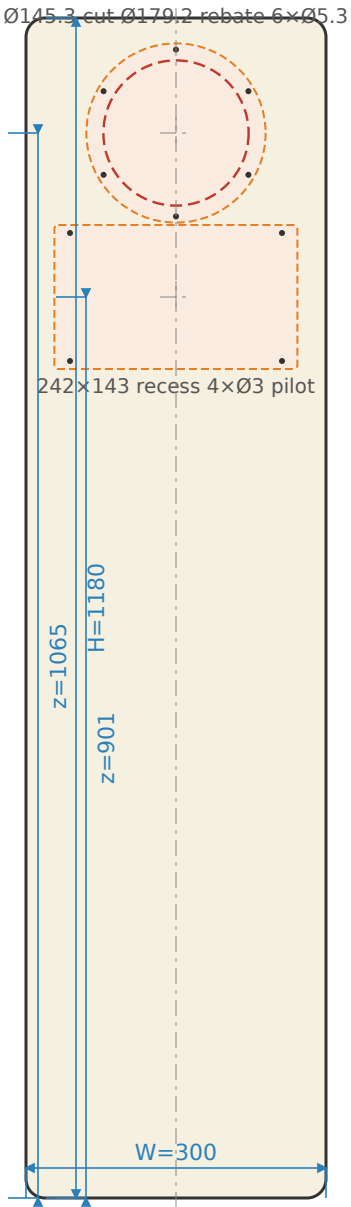


Back Panel — Cut Drawing

300 x 1180 mm, 22 mm ply, square edges

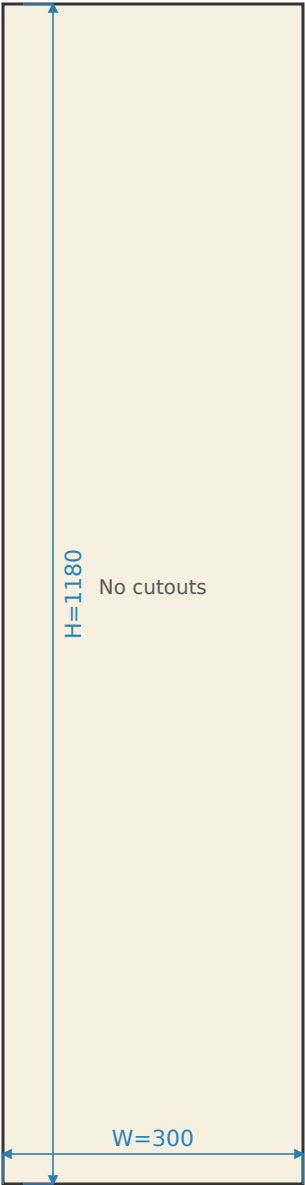


Side Panel LEFT — Cut Drawing

22 mm, 22 mm ply, woofer on left face

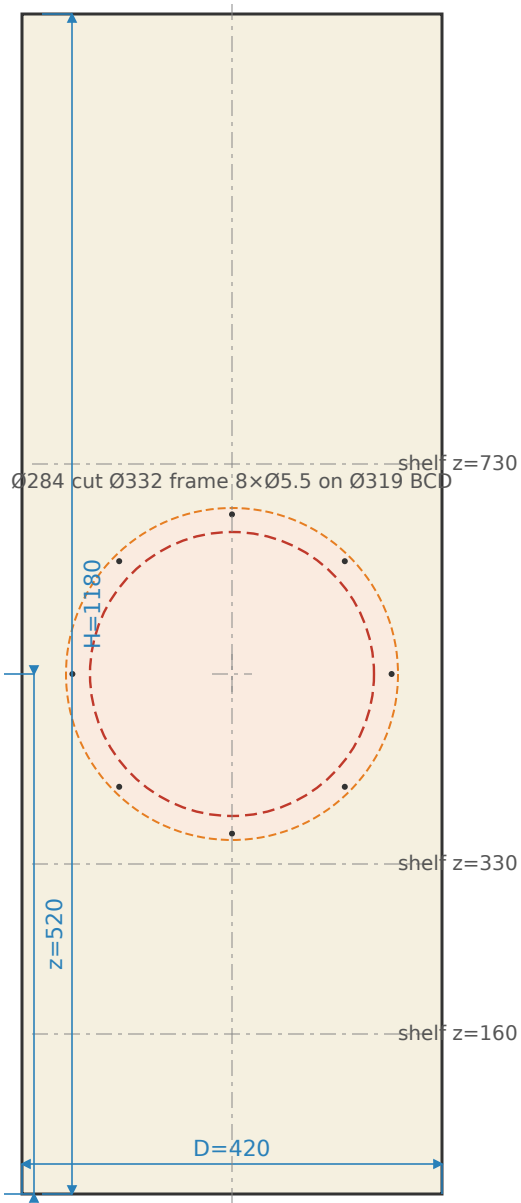


Side Panel RIGHT — Cut Drawing

22 mm, 22 mm ply, woofer on right (opposed) face

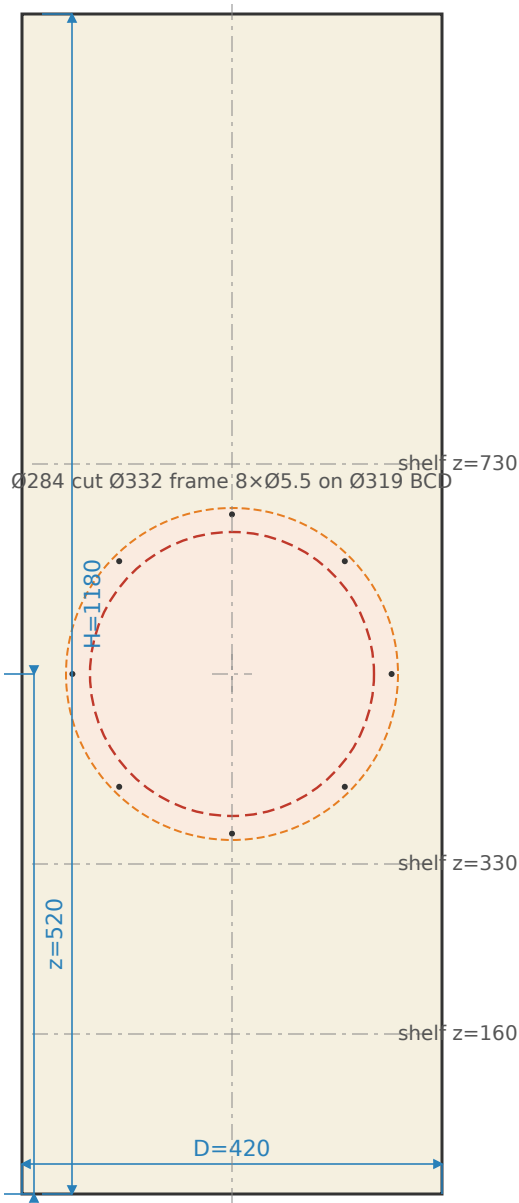


Top Panel — Cut Drawing

300 × 420 mm, 22 mm ply, R19 front edge

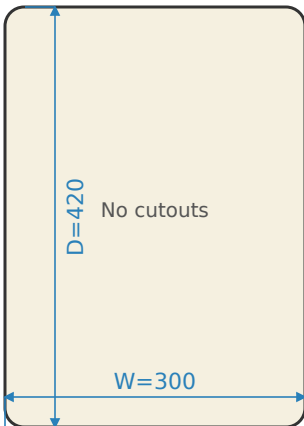

Bottom Panel — Cut


Drawing, 22 mm ply, R19 front
edge

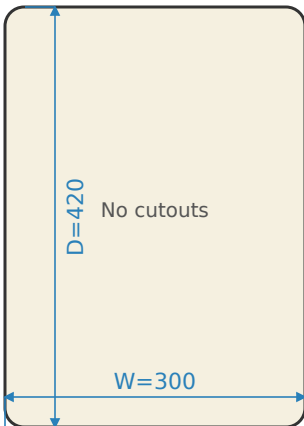

Divider Plate — Cut Drawing

19° at 985 mm, 22 mm ply, tilted
19° in cabinet


tilt 19°
internal cavity shape
follows rounded side
(walls)

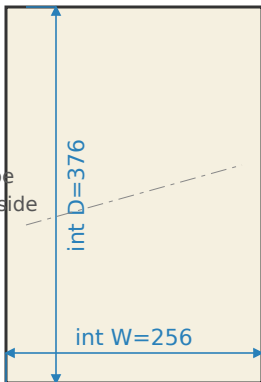

Front edge sits at $z=985$ mm, rises
19° toward rear


Shelf Brace x3 — Cut Drawing

Outer: 256 mm (internal cavity) Rim: 45 mm Thickness: 22 mm Qty: 3 (z=[160, 330, 730])

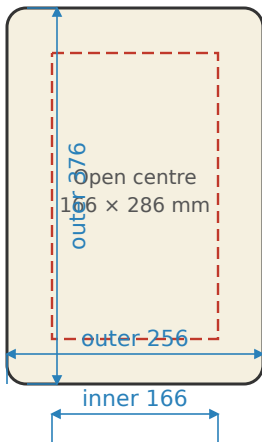


Skæreplan — massiv fyr 25 mm (Jem & Fix) — ET PAR


5× 620×2420×25 mm | 300×420×1180 mm | 2 kabinetter (V+H)

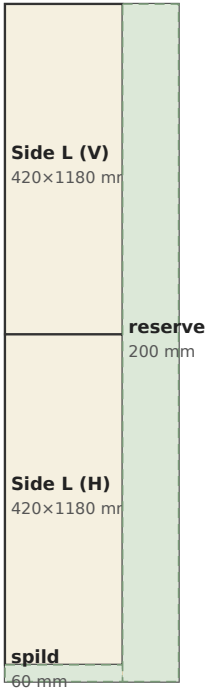


Plade 1
sider V

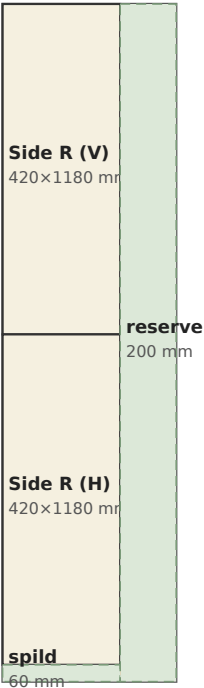


Plade 2
sider H

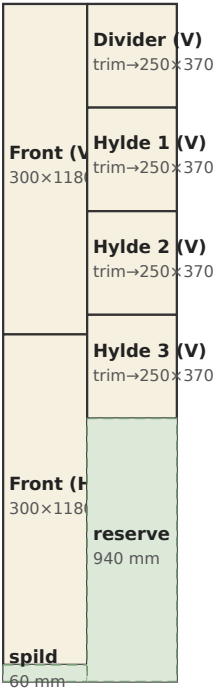

Plade 3
front + div V + hylder V

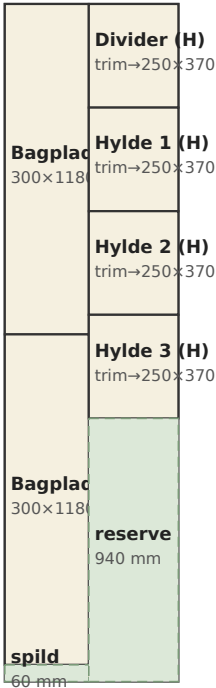

Plade 4
bagplade + div H + hylder H



Plade 5
toplåg + bund

Bruges

Reserve/spild

Rip-snit (orange)