




All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.



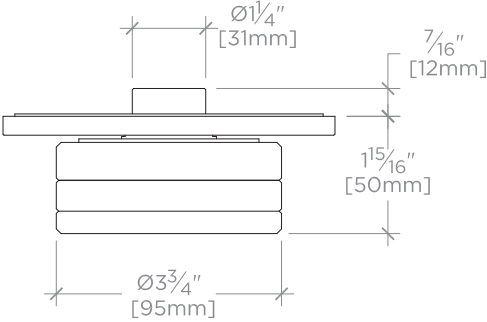

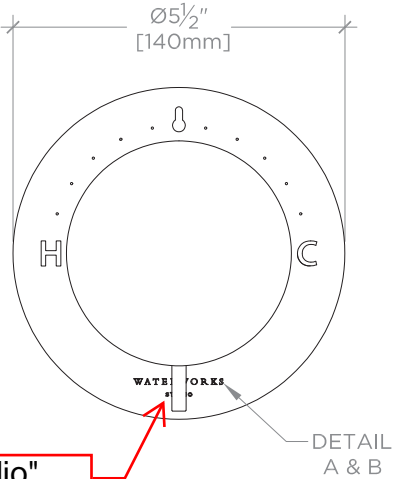

TOP VIEW

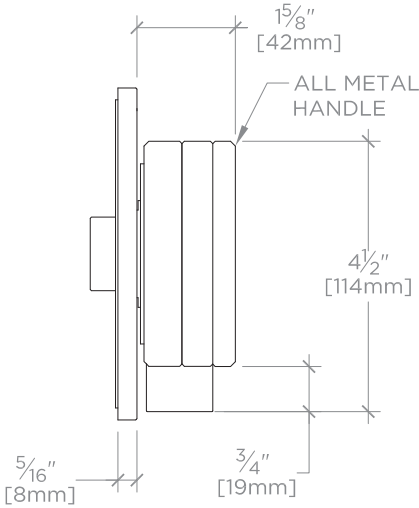

FRONT VIEW



SIDE VIEW

| COMPLIANCE MARKINGS                 |  |
|-------------------------------------|--|
| MANUFACTURER MARK ON PRODUCT        |  OR  <b>DETAIL A</b>   |
| CUPC ON PRODUCT                     |  <b>DETAIL B</b>  |
| SECONDARY PACKAGE LABELS            |   |
| ADDITIONAL SECONDARY PACKAGE LABELS | <p><b>WARNING:</b> This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>.</p> |

**SPECIFICATIONS:**

Primary Material: Brass  
Rough-in Depth Maximum: 4-1/4" [108mm]  
Rough-in Depth Minimum: 3-1/4" [83mm]  
Fittings Hole Diameter: 4-1/2" [114mm]

**NOTES:**

**REQUIRED VALVE:**  
Universal 1/2" Thermostatic Valve, **STYLE No. ~~GUTH56~~**

**CODES & STANDARDS:**

ASME A112.18.1-2018/CSA B125.1-18, State of MA

GUTH60