


Formwork

COMMERCIAL ONLY Finot Wall Mounted
Lavatory with Lever Handles, 1.2gpm
(4.5L/min)





STYLE No. FMLS80-1.2

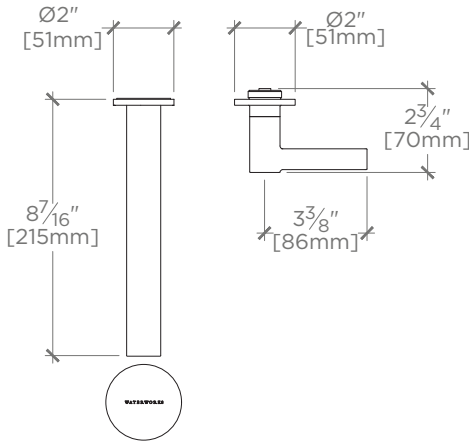BASE STYLE No. FMLS01


All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.




TOP VIEW

COMPLIANCE MARKINGS	
MANUFACTURER MARK ON PRODUCT (5MM MIN)	 DETAIL A
CUPC ON PRODUCT	 DETAIL B
FLOW RATE ON PRODUCT	DETAIL A
SECONDARY PACKAGE LABELS	<div><div>MAX FLOW RATE 1.2 GPM (4.5 L/min)</div><div></div><div>NSF/ANSI/CAN 61: Q ≤ 1</div></div> <div> Certified by IAPMO R&T</div>
ADDITIONAL SECONDARY PACKAGE LABELS	WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov .

*add dimension
(Not adjustable)

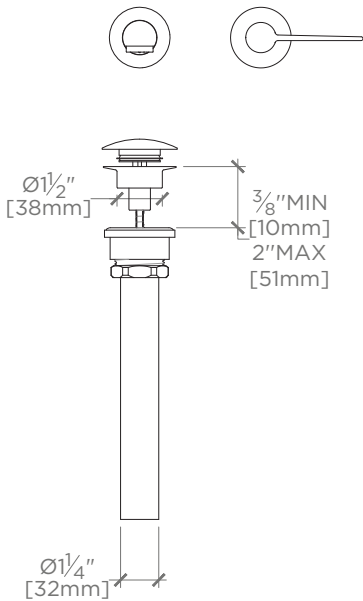

FRONT VIEW

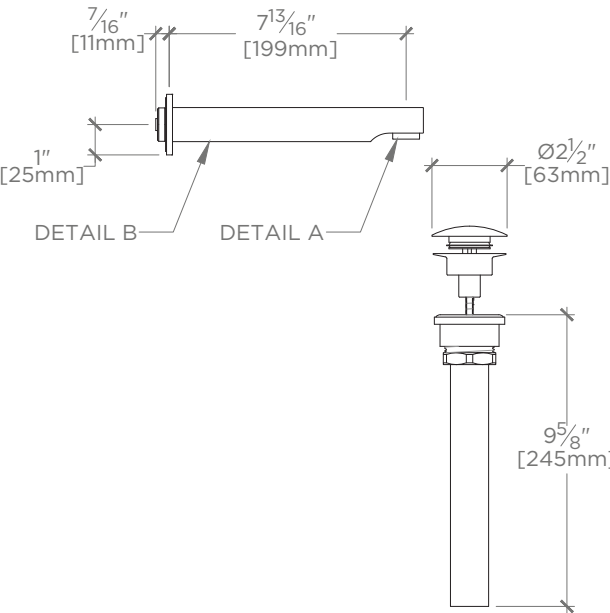

SIDE VIEW

SPECIFICATIONS:

Fittings Hole Diameter: 1-3/8" [35mm]
Drain Hole Diameter: 1-3/4" [44mm]
Drain Style: Push Touch
Handle Turn Angle: Quarter Turn
Inlet Connection: 1/2" Female NPT
Water Pressure: 85.0 psi [6.0 bar] **MAX**- 20.0 psi [1.5 bar] **MIN**
Water Pressure Recommended: 45.0 psi [3.0 bar]
Restricted Maximum Flow Rate: 1.2gpm (4.5L/min)

NOTES:

CODES & STANDARDS:

NSF/ANSI/CAN 61:Q < 1, ASME A112.18.1-2018/CSA
B125.1-18, CEC, DOE, State of MA

Valve Required: GULV29