V_{DS}	1200 V
$I_{D\ @\ 25°C}$	10 A
$R_{DS(on)}$	280 mΩ

C2M0280120D

Silicon Carbide Power MOSFET
Z-FET™ MOSFET

N-Channel Enhancement Mode

Features

- High Speed Switching with Low Capacitances
- High Blocking Voltage with Low $R_{DS(on)}$
- Easy to Parallel and Simple to Drive
- Resistant to Latch-Up
- Halogen Free, RoHS Compliant

Benefits

- Higher System Efficiency
- Increased System Switching Frequency
- Reduced Cooling Requirements
- Increased System Reliability

Applications

- Lighting
- High Voltage DC/DC Converters
- Switch Mode Power Supplies
- HVAC

Package



TO-247-3

Halogen-Free

RoHS



Part Number	Package
C2M0280120D	TO-247-3

Maximum Ratings (T_C = 25 °C unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
$I_{DS\ (DC)}$	Continuous Drain Current	10	A	V_{GS} = 20 V, T_C = 25 °C	Fig. 19
		6		V_{GS} = 20 V, T_C = 100 °C	
$I_{DS\ (pulse)}$	Pulsed Drain Current	20	A	Pulse width t_P limited by T_{jmax} T_C = 25 °C	Fig. 22
V_{GS}	Gate Source Voltage	-10/+25	V		
P_{tot}	Power Dissipation	62.5	W	T_C=25 °C, T_J = 150 °C	Fig. 20
T_J , T_{stg}	Operating Junction and Storage Temperature	-55 to +150	°C		
T_L	Solder Temperature	260	°C	1.6 mm (0.063") from case for 10s	
M_d	Mounting Torque	1 8.8	Nm lbf-in	M3 or 6-32 screw	

Electrical Characteristics (T_C = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	1200			V	V_{GS} = 0 V, I_D = 50 µA	
$V_{GS(th)}$	Gate Threshold Voltage	2.4	2.8		V	V_{DS} = 10 V, I_D = 1.25mA	Fig. 11
		1.8	2.1		V	V_{DS} = 10 V, I_D = 1.25mA, T_J = 150 °C	
I_{DSS}	Zero Gate Voltage Drain Current		1	100	µA	V_{DS} = 1200 V, V_{GS} = 0 V	
I_{GSS}	Gate-Source Leakage Current			250	nA	V_{GS} = 20 V, V_{DS} = 0 V	
$R_{DS(on)}$	Drain-Source On-State Resistance		280	370	mΩ	V_{GS} = 20 V, I_D = 6 A	Fig. 4,5,6
			530	650		V_{GS} = 20 V, I_D = 6 A, T_J = 150 °C	
g_{fs}	Transconductance		2.8		S	V_{DS}= 20 V, I_{DS}= 6 A	Fig. 7
			2.4			V_{DS}= 20 V, I_{DS}= 6 A, T_J = 150 °C	
C_{iss}	Input Capacitance		259		pF	V_{GS} = 0 V V_{DS} = 1000 V f = 1 MHz V_{AC} = 25 mV	Fig. 17,18
C_{oss}	Output Capacitance		23				
C_{rss}	Reverse Transfer Capacitance		3				
E_{oss}	C_{oss} Stored Energy		12.5		µJ		Fig 16
$t_{d(on)}$	Turn-On Delay Time		5.2		ns	V_{DD} = 800 V, V_{GS} = -5/20 V I_D = 6 A, $R_{G(ext)}$ = 2.5 Ω, R_L = 133 Ω Timing relative to V_{DS} Per IEC60747-8-4 pg 83	Fig. 27
t_r	Rise Time		7.6				
$t_{d(off)}$	Turn-Off Delay Time		10.8				
t_f	Fall Time		9.9				
E_{ON}	Turn-On Switching Loss		32		µJ	V_{DS} = 800 V, V_{GS} = -5/20 V, I_D = 6A, $R_{G(ext)}$ = 2.5Ω, L= 412 µH	Fig. 25
E_{OFF}	Turn Off Switching Loss		37				
R_G	Internal Gate Resistance		11.4		Ω	f = 1 MHz, V_{AC} = 25 mV, ESR of C_{ISS}	

Built-in SiC Body Diode Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_{SD}	Diode Forward Voltage	4.1		V	V_{GS} = - 5 V, I_{SD} = 3 A, T_J = 25 °C	Note 1
		3.7		V	V_{GS} = - 5 V, I_{SD} = 3 A, T_J = 150 °C	
t_{rr}	Reverse Recovery time	23.8		ns	V_{GS} = - 5 V, I_{SD} = 6 A T_J = 25 °C VR = 800 V dif/dt = 1000 A/µs	Note 1
Q_{rr}	Reverse Recovery Charge	70		nC		
I_{rrm}	Peak Reverse Recovery Current	4.1		A		

Note (1): When using SiC Body Diode the maximum recommended V_{GS} = -5V

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	1.8	2.0	°C/W		Fig. 21
$R_{\theta JC}$	Thermal Resistance from Junction to Ambient		40			

Gate Charge Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
Q_{gs}	Gate to Source Charge	5.6		nC	V_{DS} = 800 V, V_{GS} = -5/20 V I_D = 6 A Per IEC60747-8-4 pg 21	Fig. 12
Q_{gd}	Gate to Drain Charge	7.6				
Q_g	Gate Charge Total	20.4				

Typical Performance

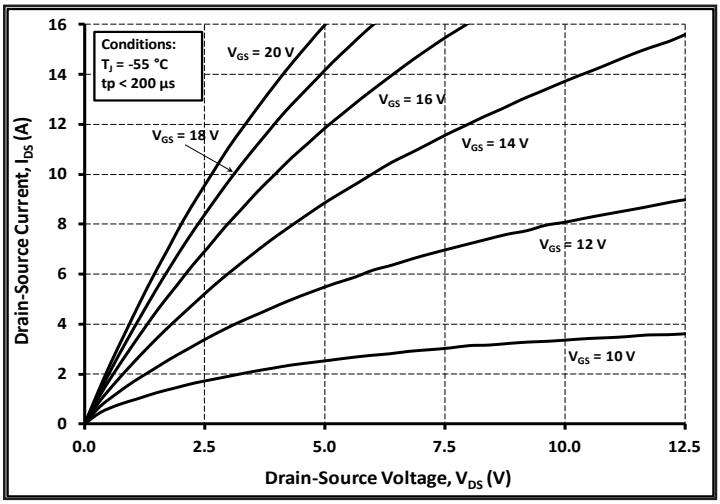

Figure 1. Typical Output Characteristics T_J = -55 °C

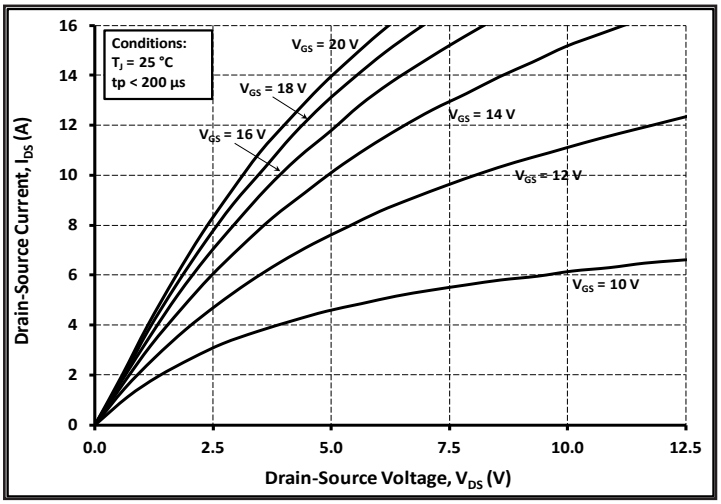

Figure 2. Typical Output Characteristics T_J = 25 °C

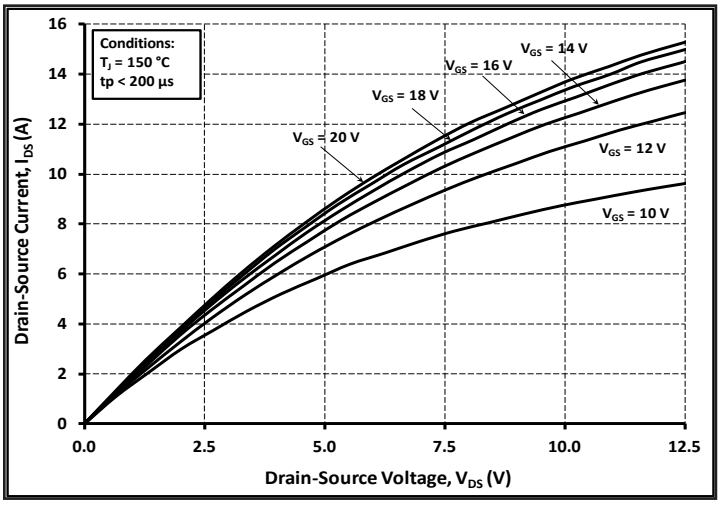

Figure 3. Typical Output Characteristics T_J = 150 °C

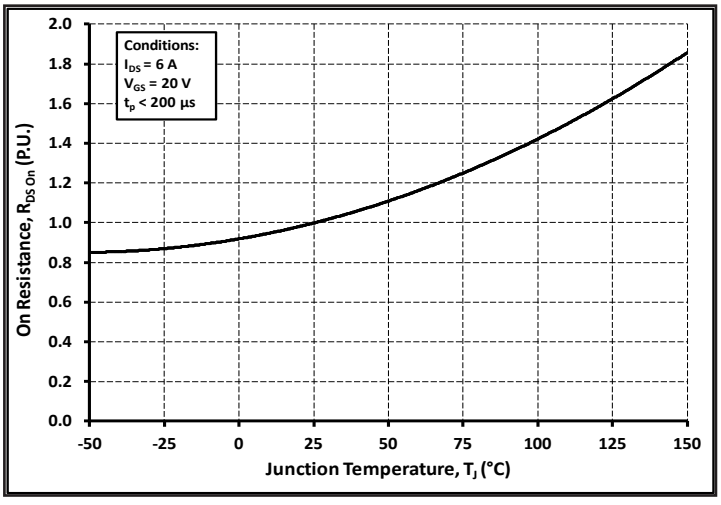

Figure 4. Normalized On-Resistance vs. Temperature

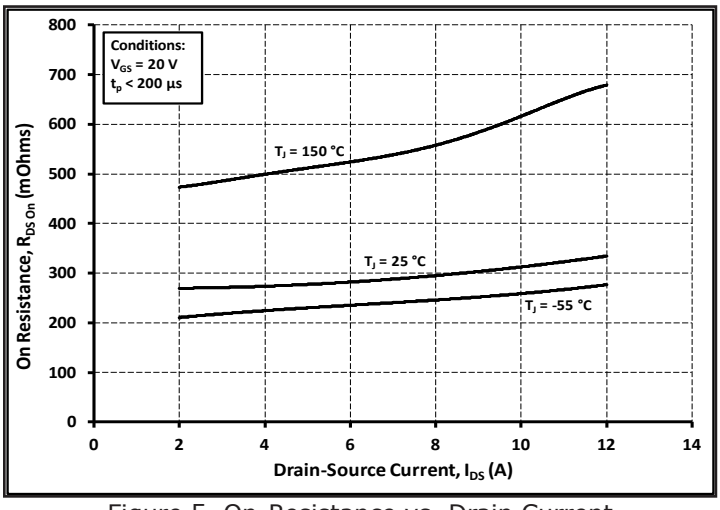

Figure 5. On-Resistance vs. Drain Current
For Various Temperatures

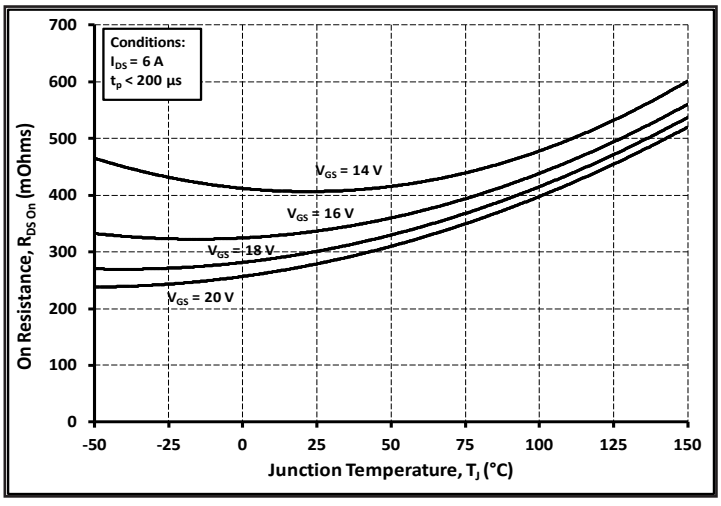

Figure 6. On-Resistance vs. Temperature
For Various Gate Voltage

Typical Performance

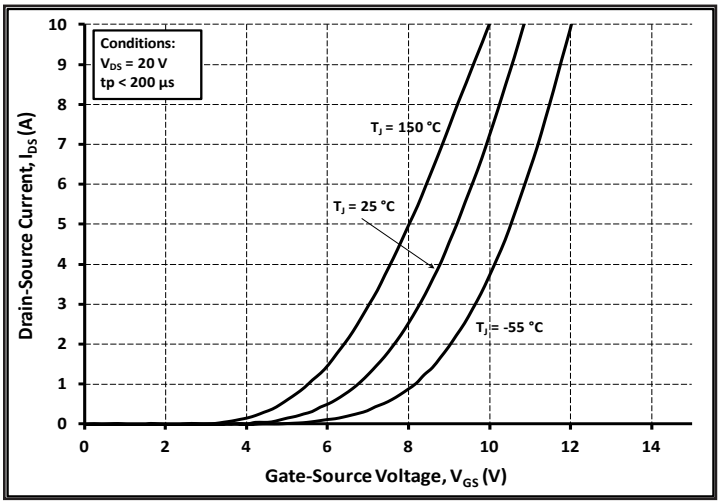

Figure 7. Typical Transfer Characteristic For Various Temperatures

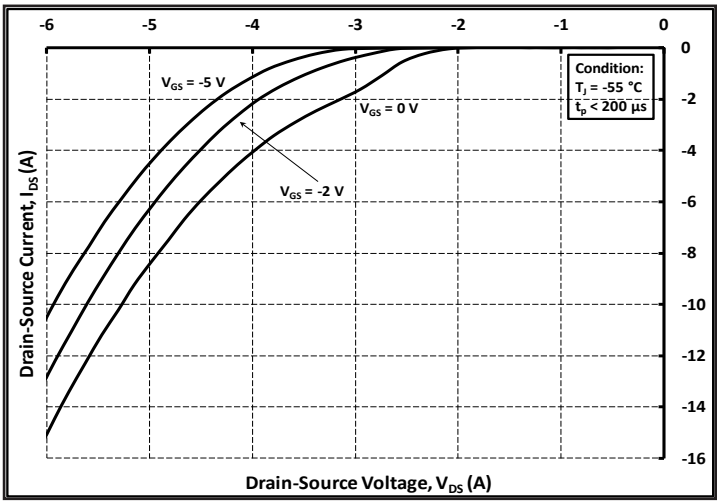

Figure 8. Typical Body Diode Characteristic T_J = -55 ºC

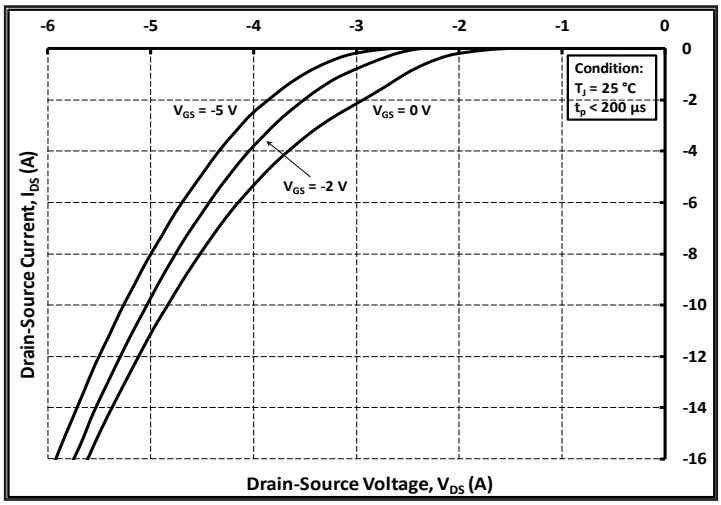

Figure 9. Typical Body Diode Characteristic T_J = 25 ºC

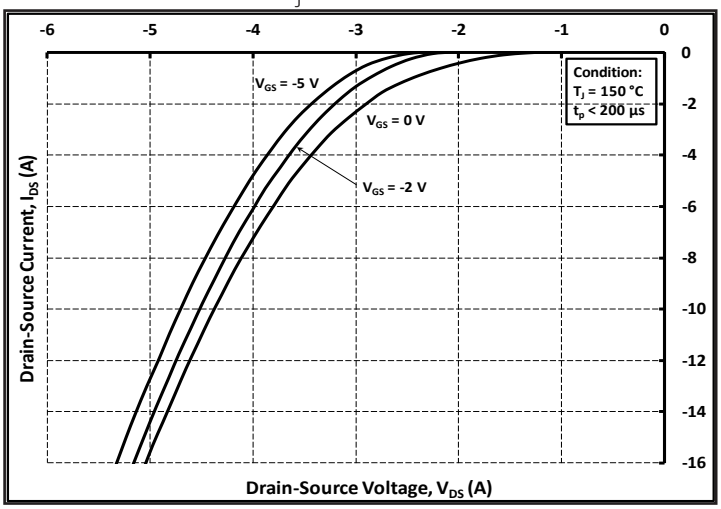

Figure 10. Typical Body Diode Characteristic T_J = 150 ºC

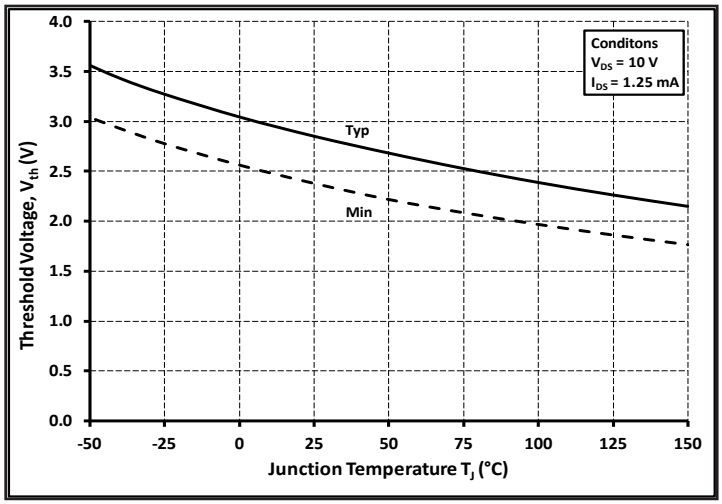

Figure 11. Typical and Minimum Threshold Voltage vs. Temperature

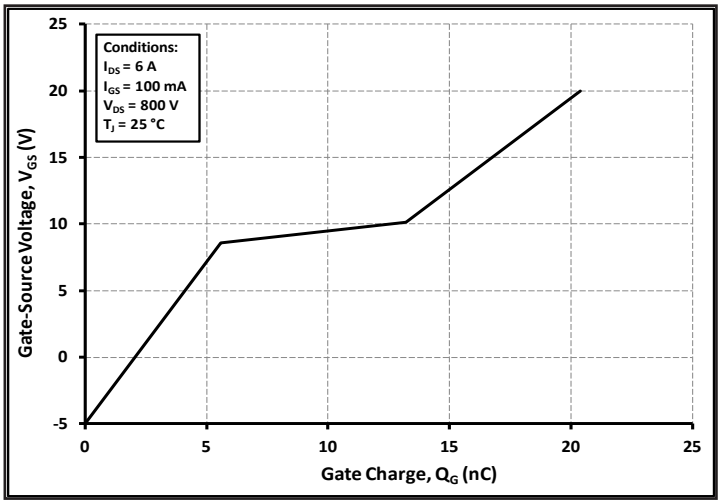

Figure 12. Typical Gate Charge Characteristic 25 ºC

Typical Performance

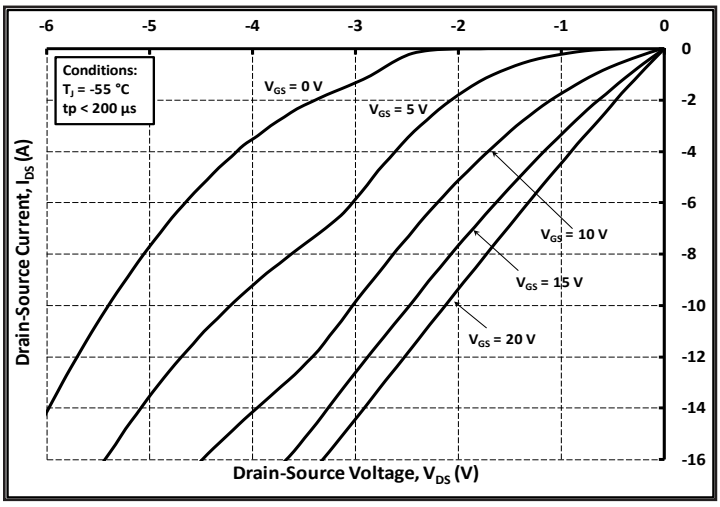

Figure 13. Typical 3rd Quadrant Characteristic T_J = -55 ºC

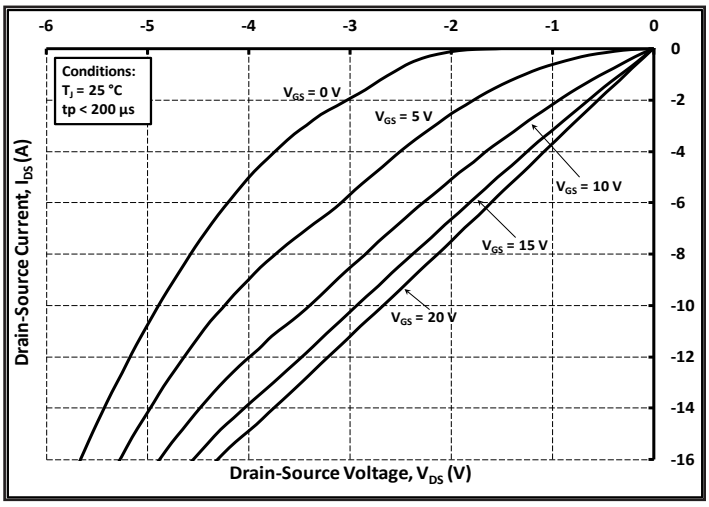

Figure 14. Typical 3rd Quadrant Characteristic T_J = 25 ºC

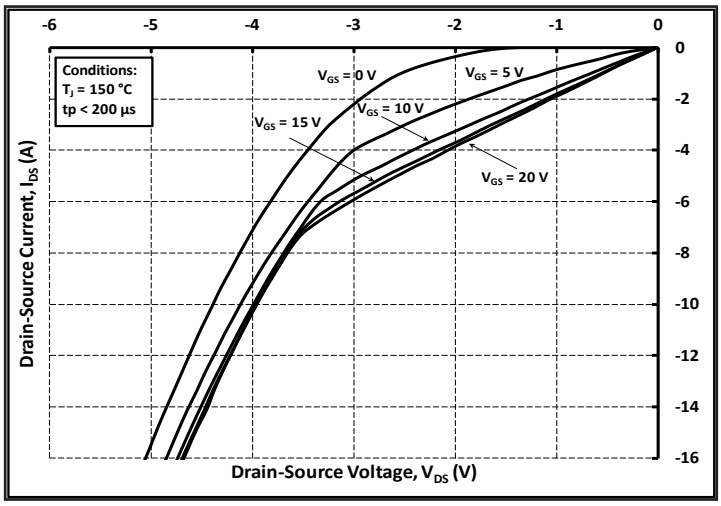

Figure 15. Typical 3rd Quadrant Characteristic T_J = 150 ºC

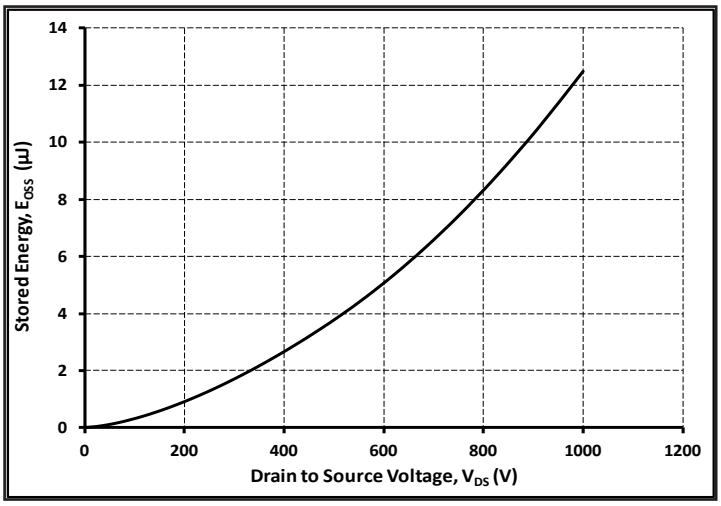

Figure 16. Typical Output Capacitor Stored Energy

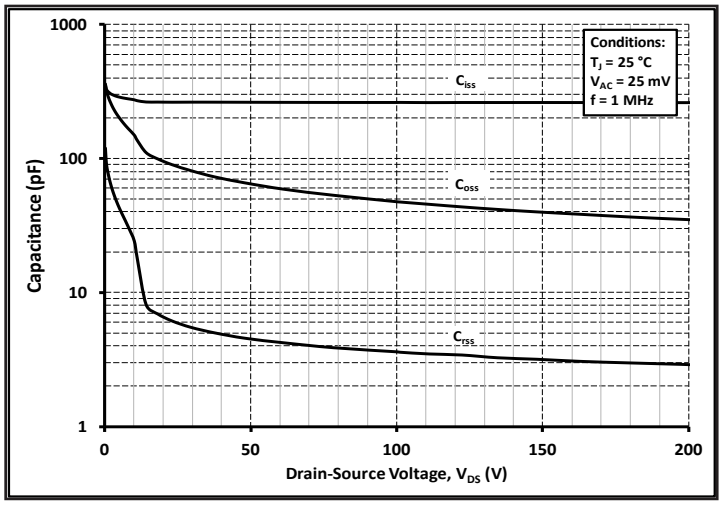

Figure 17. Typical Capacitances vs Drain Voltage (0-200 V)

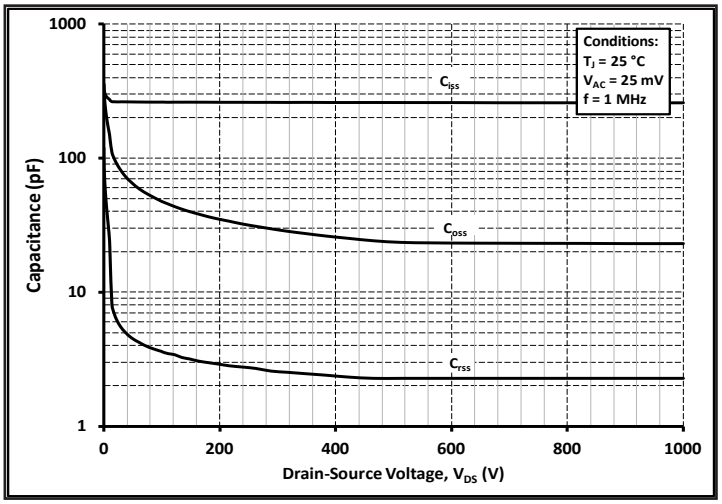

Figure 18. Typical Capacitances vs Drain Voltage (0-1000 V)

Typical Performance

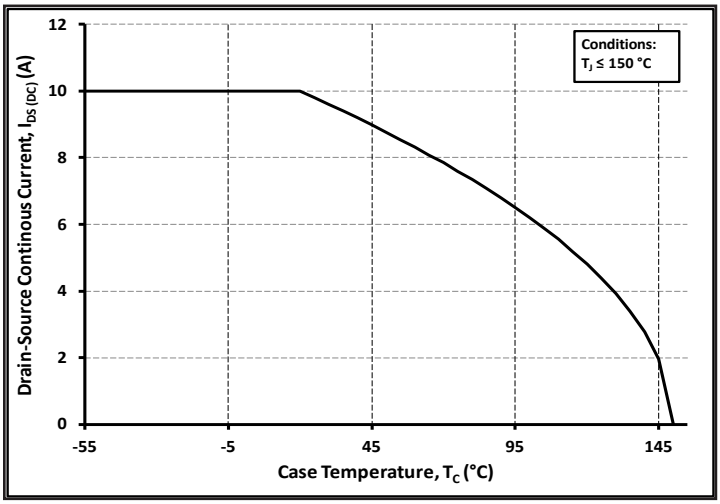

Figure 19. Continuous I_{DS} Current derating curve

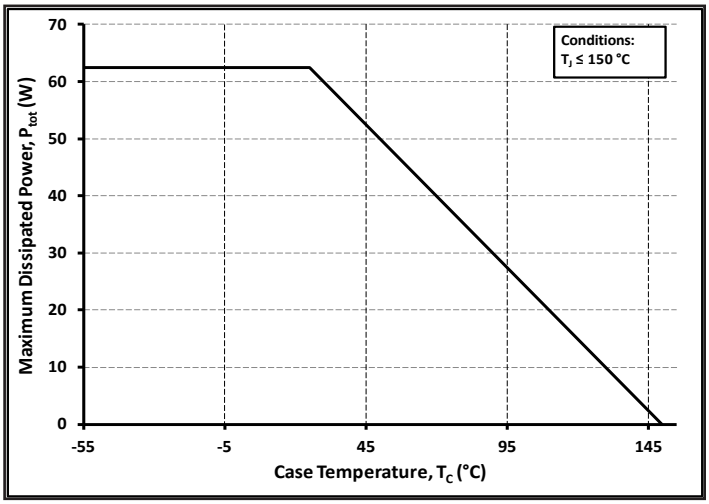

Figure 20. Power Dissipation Derating Curve

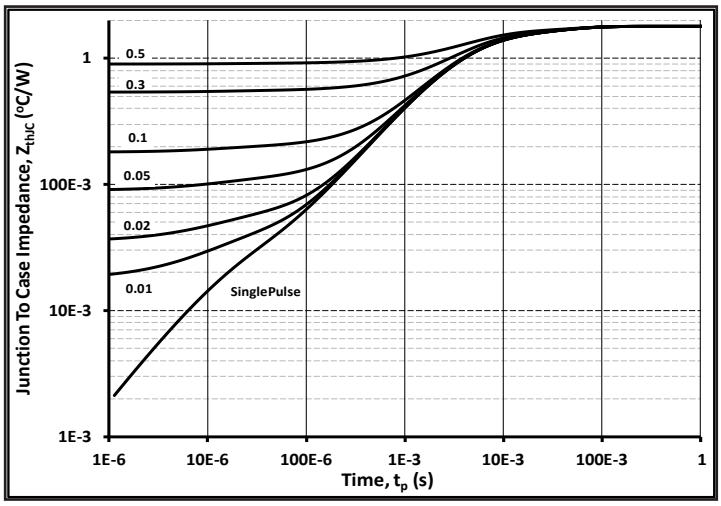

Figure 21. Typical Transient Thermal Impedance (Junction - Case) with Duty Cycle

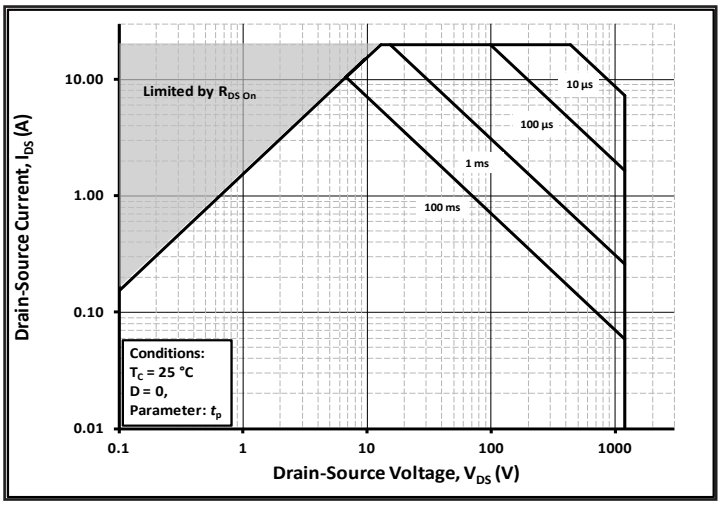

Figure 22. Safe Operating Area

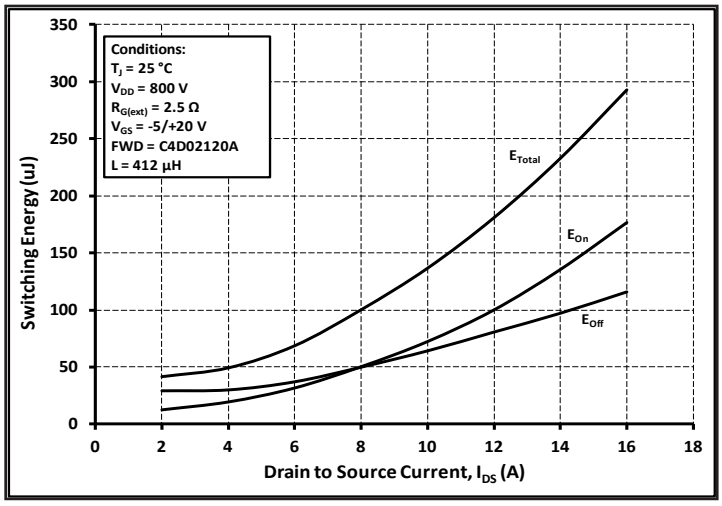

Figure 23. Clamped Inductive Switching Energy vs. Drain Current (V_{DD} = 800V)

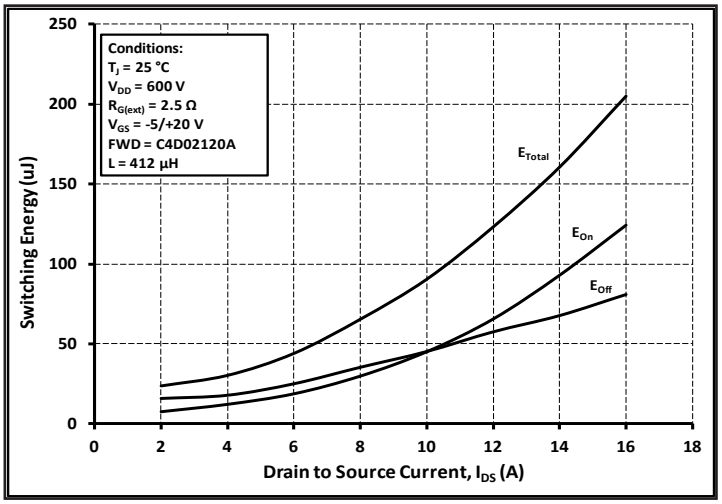

Figure 24. Clamped Inductive Switching Energy vs. Drain Current (V_{DD} = 600V)

Typical Performance

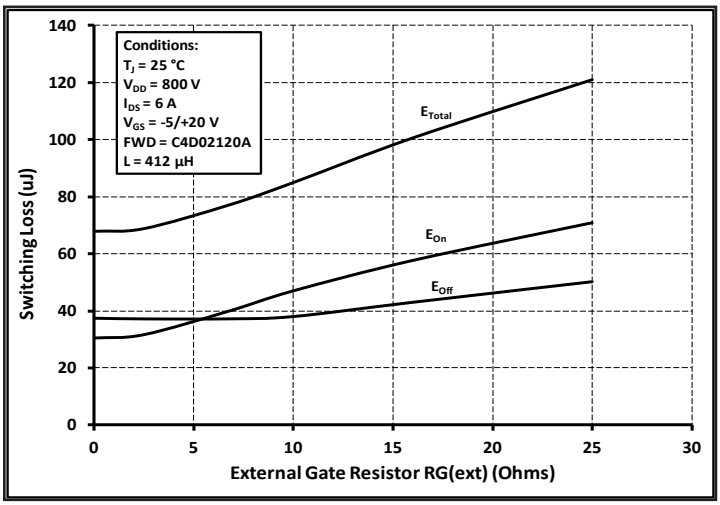

Figure 25. Clamped Inductive Switching Energy vs. $R_{G(ext)}$

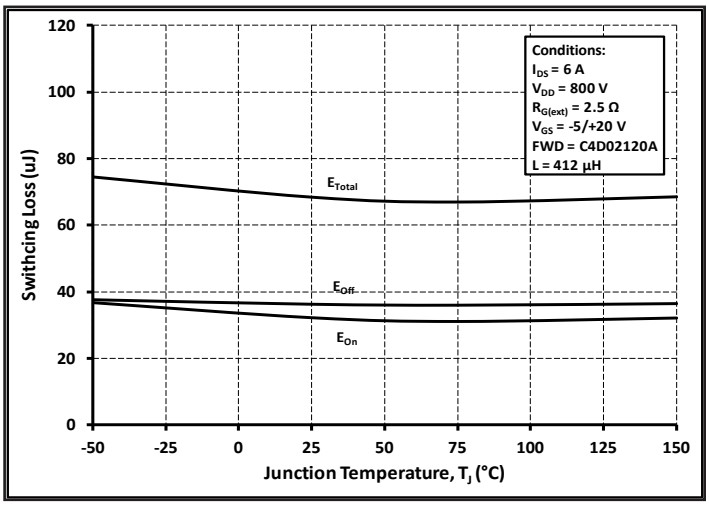

Figure 26. Clamped Inductive Switching Energy vs. Junction Temperature

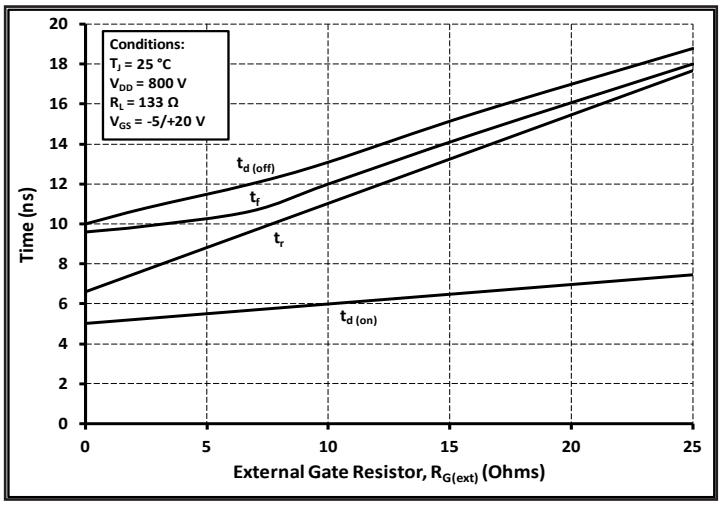

Figure 27. Resistive Switching Times vs. External Gate Resistor

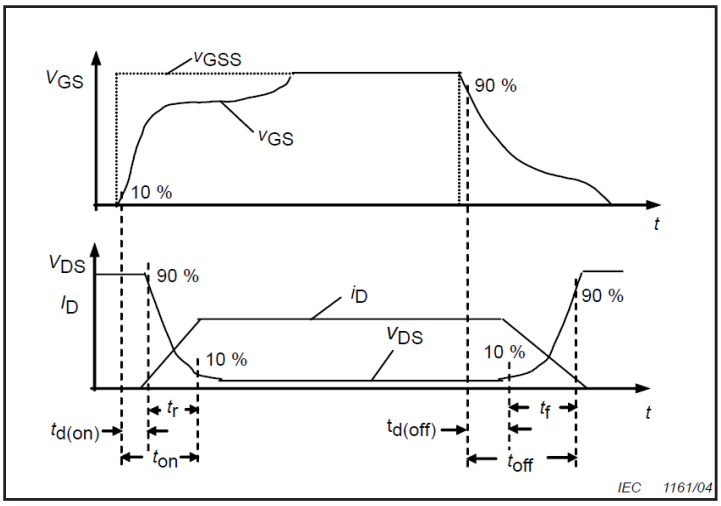

Figure 28. Resistive Switching Time Description

Test Circuit Schematic

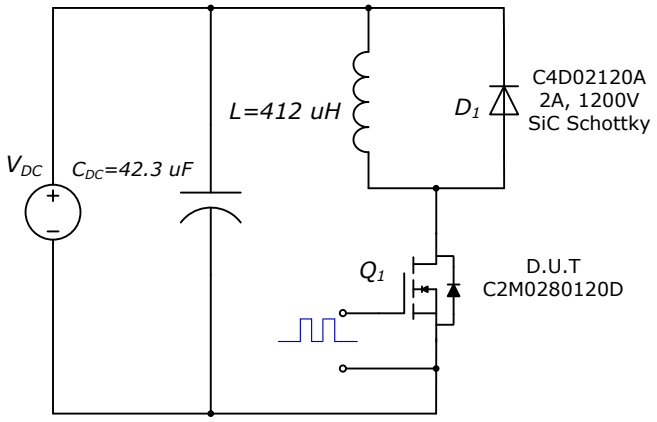

Figure 30. Clamped Inductive Switching Waveform Test Circuit

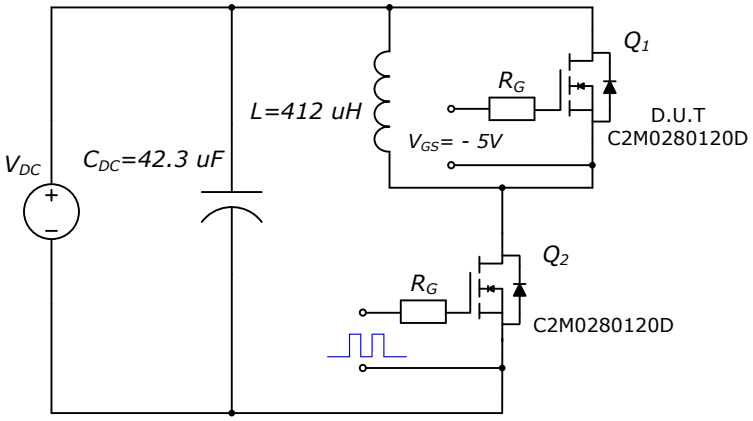

Figure 31. Body Diode Recovery Test Circuit

ESD Ratings

ESD Test	Total Devices Sampled	Resulting Classification
ESD-HBM	All Devices Passed 1000V	2 (>2000V)
ESD-MM	All Devices Passed 400V	C (>400V)
ESD-CDM	All Devices Passed 1000V	IV (>1000V)

Package Dimensions

Package TO-247-3

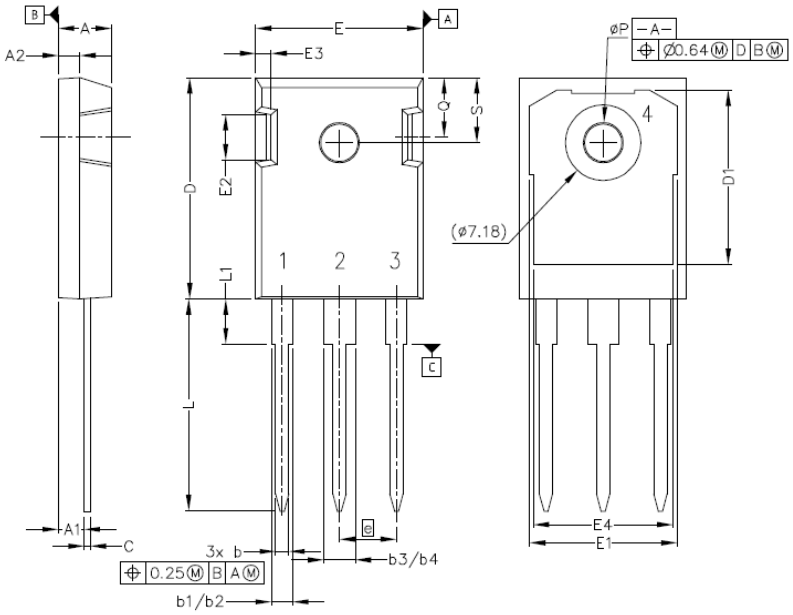



Pinout Information:

- Pin 1 = Gate
- Pin 2, 4 = Drain
- Pin 3 = Source

POS	Inches		Millimeters	
	Min	Max	Min	Max
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.042	.052	1.07	1.33
b1	.075	.095	1.91	2.41
b2	.075	.085	1.91	2.16
b3	.113	.133	2.87	3.38
b4	.113	.123	2.87	3.13
c	.022	.027	0.55	0.68
D	.819	.831	20.80	21.10
D1	.640	.695	16.25	17.65
D2	.037	.049	0.95	1.25
E	.620	.635	15.75	16.13
E1	.516	.557	13.10	14.15
E2	.145	.201	3.68	5.10
E3	.039	.075	1.00	1.90
E4	.487	.529	12.38	13.43
e	.214 BSC		5.44 BSC	
N	3		3	
L	.780	.800	19.81	20.32
L1	.161	.173	4.10	4.40
ØP	.138	.144	3.51	3.65
Q	.216	.236	5.49	6.00
S	.238	.248	6.04	6.30

Recommended Solder Pad Layout



TO-247-3

Part Number	Package	Marking
C2M0280120D	TO-247-3	C2M0280120

Notes

- **RoHS Compliance**
  The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Documentation sections of www.cree.com.

- **REACh Compliance**
  REACh substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future,please contact a Cree representative to insure you get the most up-to-date REACh SVHC Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, air traffic control systems.

Cree, Inc.
4600 Silicon Drive
Durham, NC 27703
USA Tel: +1.919.313.5300
Fax: +1.919.313.5451
www.cree.com/power