AMPAIRE

AMP-H570

HYBRID-ELECTRIC ENGINE SPECIFICATIONS



WWW.AMPAIRE.COM


Let's Fly!

AMP-H570

AMPAIRE

Peak Power

764 SHP (**570**kW)

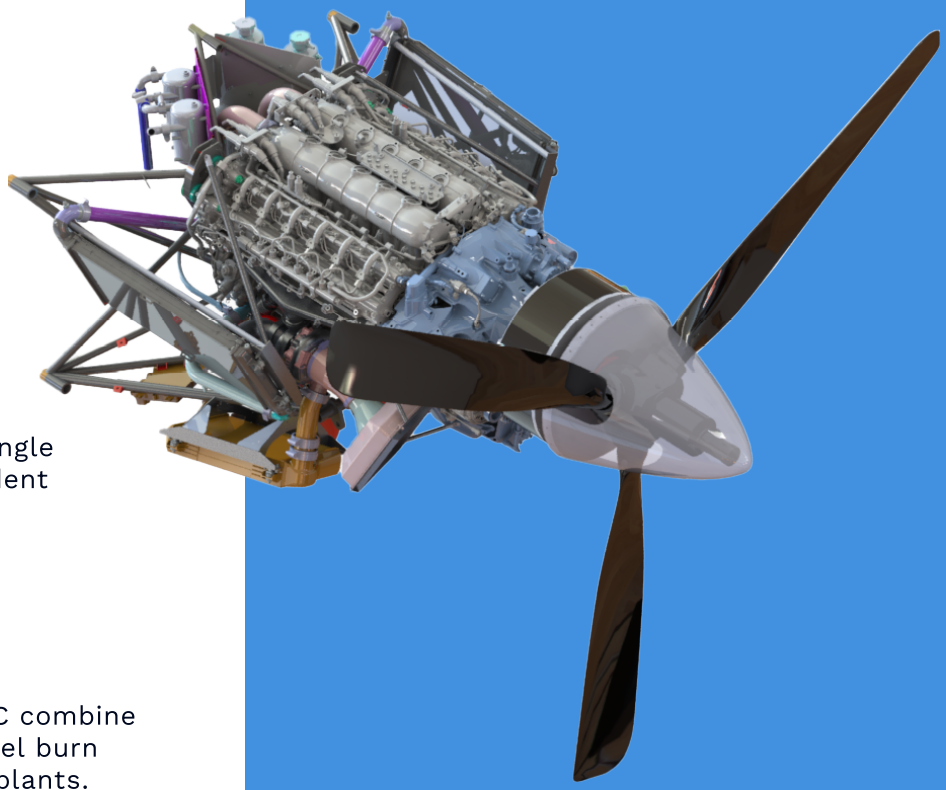

Reliability

Fault-tolerance of a twin in a single powerplant with three independent propulsion sources.

Efficiency

Electric boost, combined with **0.34** lb/h/hp (**160** g/hr/kW) BSFC combine to create a typical **50-70%** in fuel burn reductions vs. turboprop powerplants.

Performance

Enhanced thrust management and climb performance without the hot and high condition power lapse common with turboprops.

Maintenance

Flight hours, rather than cycles-based maintenance, eliminates the turboprop penalty. *Ampaire's* maintenance support package removes any technology life-cycle cost uncertainty and provides a direct path for future improvements.

Environmental

50-70% reduction in emissions with *Jet A / Jet JP-8* and up to **100%** net reduction with drop-in sustainable aviation fuels (SAF.)

SETTING A NEW STANDARD

Delivers **50-70%** reduction in fuel burn versus similar powered gas turbine equivalents.

Up to **50%** direct operating cost savings with maintenance program.

Contributes directly to the reduction of airline and airport scope 1 emissions.

Increased aircraft payload on long range with **2X** ferry range.

Superior hot and high performance.

Increased safety, due to a graceful degradation of performance in fault conditions.

Reduced high pitch noise.

Jet A, Jet JP-8 and *SAF* fuel compatibility.

WWW.AMPAIRE.COM

Let's Fly!


AMP-H570

Green credentials, without the green cost penalty.

Optimised for the regional passenger and cargo market

ADVANCING YOUR INVESTMENT OUTCOMES

The AMP-H570 offers a compelling investment with lower initial purchase and maintenance costs compared to the equivalent power PT6, along with significant fuel savings that reduce direct operating costs by up to 50%. This allows for a typical recovery of the initial investment within five years. Its maintenance schedule, independent of flight cycles, combined with hybrid systems optimized for high-frequency, short-duration operations, further enhances overall cost efficiency.

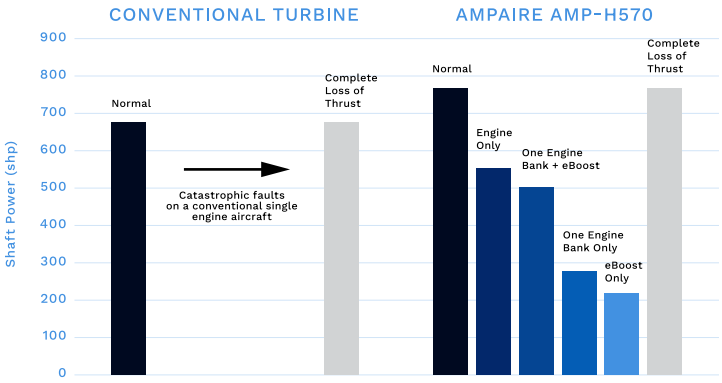

NO COMPROMISE PERFORMANCE

Benefit from flexible power delivery that gives the pilot control over when to use the electric boost, ensuring optimal performance at all times. Leverage enhanced capabilities under hot and high conditions, thanks to the combination of electric boost and turbo charger, guaranteeing superior performance no matter the environment.

RELIABILITY WITH EASE OF MAINTENANCE

Achieve reliability with ease of maintenance through the AMP-H570 state-of-the-art diagnostics and prognostics, which ensure optimum availability and minimize the chances of unscheduled maintenance. Ampaire's MX Program offers comprehensive assurance on maintenance costs, alleviating any concerns about adopting new technology and ensuring smooth operation.

TECHNICAL SPECIFICATIONS

Peak Power (SHP)	Height (inches)	Width (inches)	Length (inches)	Dry Mass (lbs)
764	29.5	33.5	51	<1000

TECHNOLOGY

HYBRID POWER EFFICIENCY	GREEN	FLEXIBLE + SCALABLE	IMPROVED RELIABILITY + MAINTAINABILITY	QUIET
Electric Boost, for high power flight phases with **0.32 lb/h/hp (149 g/h/kW)** net BSFC. **0.34 lb/h/hp (160 g/h/kW)** BSFC during cruise, without Electric Boost.	Emissions typically reduced **50%**, and up to **70%** on short flights with *JET A*. Native SAF compatible, further reducing net emissions to **100%** reduction.	Wide network deployment without waiting for changing infrastructure. Maintenance program offers direct upgrade path to latest certified technology. Easily scalable electric boost power rating.	Electric motors and inverters have very few moving parts, leading to inherently higher reliability. Modern *FADEC* controlled piston engine provides two 6-cylinder fault-independent banks.	Eliminates high pitch gas turbine noise.