PALLAS SO (5102010001)


Equipo doméstico ósmosis Inversa cinco etapas montado sobre bancada metalica con válvula hidráulica shut-of.


COMPONENTES:

- **CARTUCHO 5 MICRAS 9 ¾" PP**
- **CARTUCHO CARBON BLOCK 9 ¾"**
- **CARTUCHO CARBON GRANULADO 9 ¾"**
- **MANÓMETRO 0 - 10BAR**
- **MEMBRANA 50 GPD *GREENFILTER***
- **SHUT-OFF VALVE**
- **POST-FILTRO CARBON IN-LINE 2"**
- **FLOW RESTRICTOR**
- **TANQUE ACUMULADOR 16 L**


ACCESORIOS:

- **LLAVE APRIETE FILTROS**
- **TOMA DE RED 3/8" PARA ¼"**
- **VÁLVULA ENTRADA ¼"**
- **CODO ¼" VÁLVULA ACUMULADOR**
- **COLLARÍN DE DESAGÜE**
- **TUBERÍA ¼" PE**
- **GRIFO DISPENSADOR CROMADO CON CIERRE CERAMICO**
- **EMBALAJE Y MANUAL INSTRUCCIONES**





ESQUEMA HIDRÁULICO:

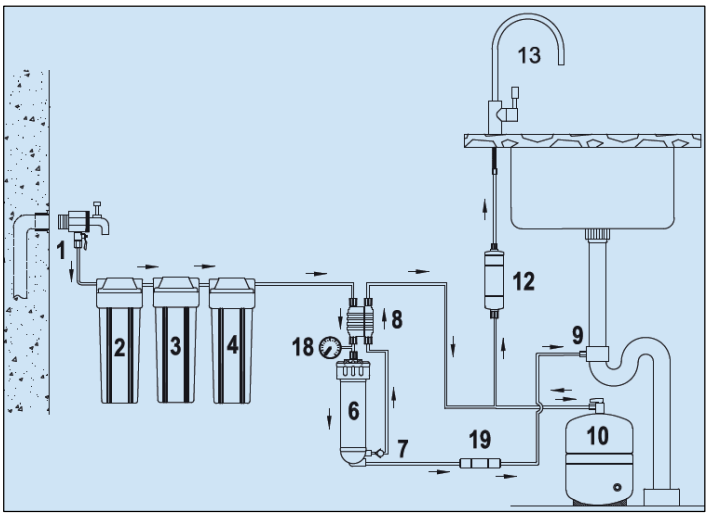


a FILTRO DE SEDIMENTO 5 µM
b FILTRO CARBON GRANULADO
c FILTRO CARBON BLOCK
d MANÓMETRO
e FLOW RESTRICTOR
g POSTFILTRO CARBON GRANULADO
h CONTENEDOR MEMBRANA
r SHUT OFF VALVE

Pallas
REVERSE OSMOSIS

SO Hydraulic

COMPONENTES:

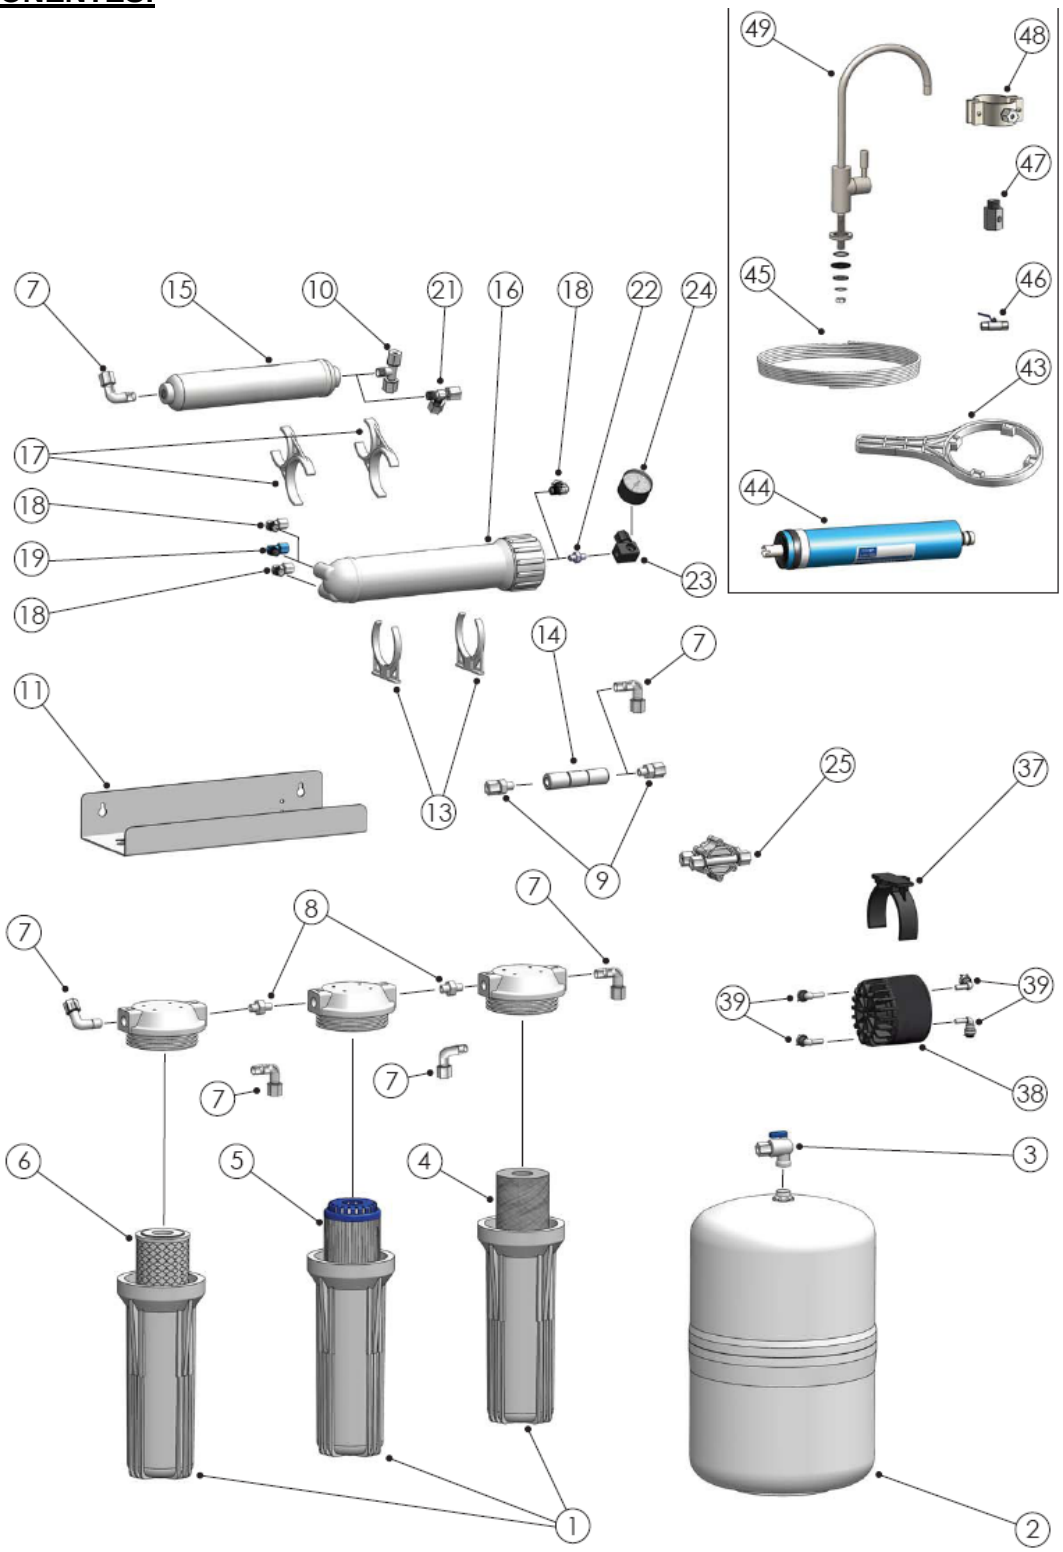

Pallas
REVERSE OSMOSIS

SO Hydraulic

NUMBER	CODE	DESCRIPTION	PALLAS SO	PALLAS PP	PALLAS BP+AF	PALLAS BP	PALLAS UV
1	5202000001	2-piece filter housing in white plastic	●	●	●	●	●
2	5202000002	Pressure tank made of steel with plastic coating	●	●	●	●	●
3	5202000003	1/4" valve for pressure tank	●	●	●	●	●
4	5202000004	Sediment filter 5 micron 9 ¾"	●	●	●	●	●
5	5202000005	GAC Granulated active carbon filter 9 ¾"	●	–	●	●	●
6	5202000006	Activated carbon block filter 9 ¾"	●	●	●	●	●
7	5202000007	JACO male elbow thread 1/4" - tube 1/4"	●	●	●	●	●
8	5202000008	Double male connector 1/4"	●	–	–	–	–
9	5202000009	JACO male straight connector thread 1/4" - tube 1/4"	●	●	●	●	●
10	5202000010	JACO tee central male thread 1/4" - tube 1/4"	●	–	–	–	–
11	5202000011	Painted metallic bracket for models without pump	●	●	–	–	–
12	5202000012	Painted metallic bracket for models with pump	–	–	●	●	●
13	5202000013	Single mounting clip of 2 1/2"	●	●	●	●	●
14	5202000014	In-line flow restrictor of 400 cc	●	–	●	●	●
15	5202000015	GAC Granulated active carbon post-filter 2"	●	●	●	●	●
16	5202000016	Membrane housing 2012	●	●	●	●	●
17	5202000017	Double mounting clip 2" / 1/2"	●	●	●	●	●
18	5202000018	JACO elbow thread 1/8" - tube 1/4"	●	●	–	–	–
19	5202000019	JACO elbow thread 1/8" - tube 1/4" with SS check-valve	●	–	●	●	●
20	5202000020	JACO male straight connector thread 1/8" - tube 1/4"	–	–	●	●	●
21	5202000021	JACO tee side male thread 1/4" - tube 1/4"	–	●	●	●	●
22	5202000022	Double male connector 1/8"	●	–	●	●	●
23	5202000023	3-way adaptor for pressure gauge	●	–	●	●	●
24	5202000024	Pressure gauge 1/8" D40	●	–	●	●	●
25	5202000025	Shut-off valve	●	–	–	–	–
26	5202000026	JACO male elbow thread 3/8" - tube 1/4"	–	–	●	●	●
27	5202000027	Pump UP-7000	–	–	●	●	●
28	5202000028	Motor for pump UP-7000	–	–	●	●	●
29	5202000029	Low pressure switch	–	–	●	●	●
30	5202000030	High pressure switch 20-40 PSI	–	–	●	●	●
31	5202000031	Inlet electrovalve 24V with filter mesh	–	–	●	●	●
32	5202000032	Flushing electrovalve 24V + PJK010	–	–	●	–	–
33	5202000033	UV Ballast	–	–	–	–	●
34	5202000034	UV lamp	–	–	–	–	●
35	5202000035	Q-sleeve	–	–	–	–	●
36	5202000036	UV set housing	–	–	–	–	●
37	5211004674	Clip for permeate pump	–	●	–	–	–
38	5211004673	Permeate pump	–	●	–	–	–
39	5202000037	QC elbow stem 1/4" - tube 1/4"	–	●	–	–	–
40	5202000069	Transformer for wall mounting 220-24V / 1,2A connection type D	–	–	●	●	–
41	5202000038	Transformer 220-24V / 2A connection type G	–	–	–	–	●
42	5202000039	Electric aerial connector	–	–	●	●	●
43	5202000040	Wrench for filter housing	●	●	●	●	●
44	5202000041	50 GPD membrane	●	●	●	●	●
45	5202000042	Polyethylene tube 1/4"	●	●	●	●	●
46	5202000043	White ball valve 1/4"	●	●	●	●	●
47	5202000044	Wall adaptor 3/8" – 3/8" drill 1/4"	●	●	●	●	●
48	5202000045	Drain clamp 1/4"	●	●	●	●	●
49	5202000046	Pallas faucet	●	●	●	●	●
50	5202000074	Insert 1/4"	●	●	●	●	●
51	5202000018 5202000087	JACO elbow pipe 1/8" - tube 1/4" Flow restrictor insert type	–	●	–	–	–
52	5202000088	O-ring for UV cap	–	–	–	–	●
-	5202000085	Instruction's manual	●	●	●	●	●

Pallas
REVERSE OSMOSIS

SO
Hydraulic

PEGATINA TÉCNICA TRASERA:

PALLAS - REVERSE OSMOSIS SYSTEM					
Model:	●SO	○ PP	○ BP	○ BP+AF	○ BP+UV
	○ CLASSIC	○ ADVANCE	○ SMART	○ PREMIUM	
Max. RO flow rate: 150 LPD (250 ppm softened tapwater, 25°C, 15% recovery, 3,4 bars)					
Inlet pressure (min. / max.): ○ 1 bar / 3 bar ● 3 bar / 6 bar					
Inlet water temperature (min. / max): 2 °C / 40 °C					
TDS max: 2000 ppm. Cond. max: 3650 µS.					
Power Supply: 24 Vdc ○ 1 A ○ 2 A ● Without Power Supply					
Manufactured to: **POLLET WATER GROUP** www.pwg.be by: PURICOM WATER INDUSTRIAL CORPORATION Taiwan / Taichung	CE	For indoor use only			

EMBALAJE Y ETIQUETAS DE LOS FILTROS:

