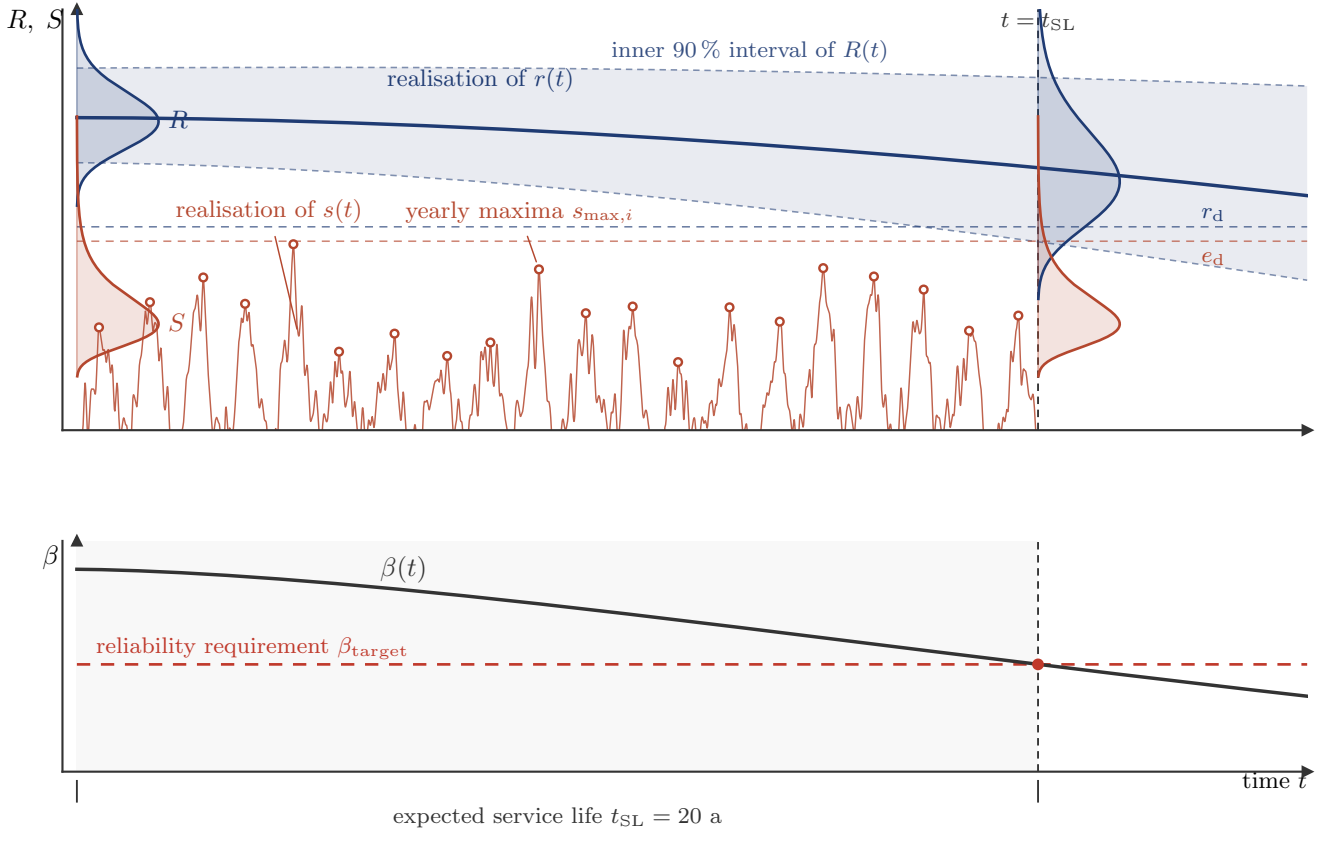

R, S
t = t_SL
inner 90 % interval of R(t)
realisation of r(t)
R
realisation of s(t)
yearly maxima s_max,i
r_d
e_d
S
β
β(t)
reliability requirement β_target
time t
expected service life t_SL = 20 a