COLLECTION OF THE CTL DECISIONS
DECISION SHEET

Standard:	**Sub clause:**	**Sheet No.**
IEC60065 6ed.	13.2	**525**
Subject	**Key words:**	**Decision taken at the 40th meeting 2003**
Applied force for internal parts	force for internal parts	

Question:

In clause 13.2, it is specified that 2N for internal parts and 30N for the outside are applied simultaneously while taking measurement of clearance. However, it is not specified that forces are applied to internal parts while taking measurements between two internal parts, ex. primary circuit component and secondary circuit component.
Which is the appropriate method to measure clearance between two internal parts ?

a) 2N forces are applied to the both parts simultaneously.

b) First, a 2N force is applied to one part and removed. And then a 2N is applied to the other one.


c) Other opinion

Decision:


First, a 2N force is applied to one part and removed. Then a 2N force is applied to the other part.

Explanatory Notes:

a)

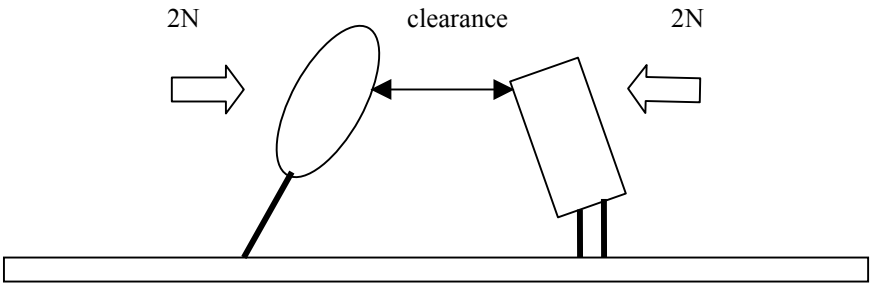

b)

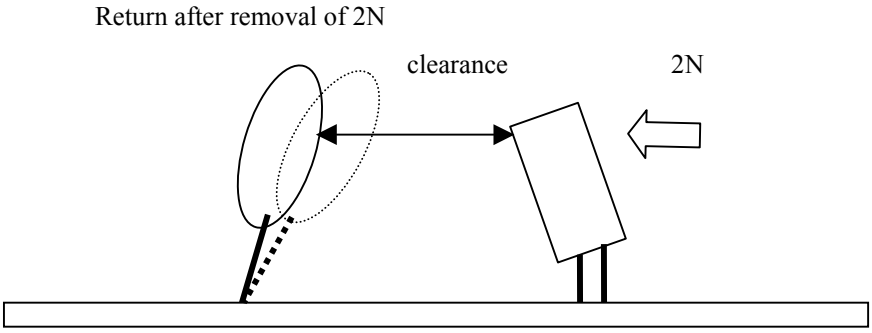

c) ?