## DATASHEET

LED Display offers high-end performance featured with front access capabilities that specially designed for indoor, so can make the installation and maintenance to be easily. The LED Display using top quality components such as the EPISTAR LED Chip, the panel is light and sturdy, excelent picture quality and flicker-free video. The LED Display refresh rate performance up to 3840 Hz.

GOB Technology
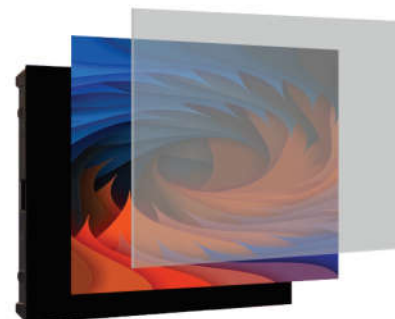
Front Access

Features

2 mm PIXEL PITCH — Physical Pixel Pitch of The Tile	**GREEN ENERGY** — Super Energy Saving	**MAGNET** — Front Access System
LED 1PR1PG1PB — LED Pixel Configuration	**FLICKER FREE** — High Refresh Rate 3840 Hz	**AL** CABINET — Aluminium Die-cast Cabinet
CONTRAST — Superior Contrast	**CALIBRATION** — On-site color calibration	**IP43** Ingress Protection — Ingress Protection 43
VIEWING DISTACE — Viewing Distance ≥ 2 m	**SMD** EPISTAR — EPISTAR Surface LEDs	**ANTI-AGING** — Support Aging Compensation

Rear

640 mm

480 mm

Side

80 mm

HPF

Specification

Model	SL-P2.0G-IF
Drive Mode	1/40 Scan
Pixel Pitch	2 mm
Technology	(Glue on Board) GOB Technology
LED Chip	Epistar
LED Configuration	1PR1PG1PB
Pixel Density	250.000 dots/sqm
Cabinet Size	640*480*80 mm
Material	Die-Casting
Brightness	1000 cd/m²
Voltage	AC220V ± 10%
Maximum Power	750 w/sqm
Average Power	280 w/sqm
View Angle	140° (H), 140° (V)
Viewing Distance	≥ 2 m
Refresh Rate	≥ 3840 Hz
Gray Level	16 bits
Temperature Operation	-10°C ~ 60°C
Humidity Operation	10% ~ 85%
Ingress Protection	IP43
Cabinet Weight	6.5 Kg