




DOUBLE SIDED ROUND LED SIGN



- IP65
- 2000K-9500K Adjustable
- 60 Frame/sec
- Refresh Rate 1920Hz

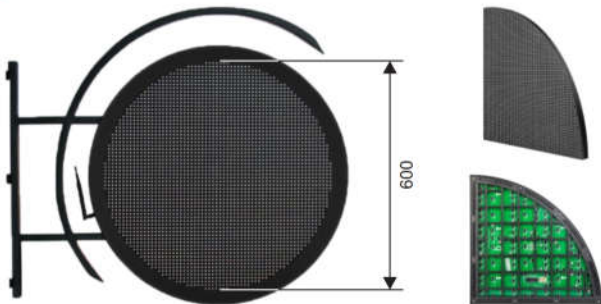

Specific shape LED sign board, showing excellent color, large viewing angle and clear image.

Double sided sign board design, suitable for advertising in shops, malls, business center , café.

Semi outdoor & outdoor use, with IP65 protective grade.

Simple installation and easy operation, for playing video, text, pictures etc. various formats.

Playing content can be saved into internal 8GB storage.

Specification

Model	SL-P4.0L-O		
Pixel Pitch	4 mm	Frame Rate	≥ 60 frames/sec
Pixel Configuration	SMD1921 1R1G1B	Defect Rate	≤ 0.0001
Unit size	Φ600*90 mm	Control Mode	Asynchronous
Pixel density/unit	128*128 pixels /unit	Data Transfer Method	USB/WIFI
Cabinet Material	Steel Cabinet	MTBF	> 10,000 hours
Optimal Viewing Distance	≥ 4 m	Life span	≥ 100,000 hours
Best Viewing Angle	H: 120° V: 120°	Protective Grade	IP65
Brightness	≥ 4500mcd	Operating Temperature	- 30°C ~ 50°C
Grey Scale	16 bit	Operating Humidity	10% ~ 90%
Color Temperature	2000K-9500K adjustable	Input Voltage	AC110-240V / 50Hz-60Hz
Refresh Rate	≥ 1920Hz	Weight	Approx 11kg/unit
Driving Method	Contant current drive 1/16 Scanning	Power Consumption	Max: 200w/m ² Average: 120w/m ²