


## DATASHEET

### All In One Design, Multiple Functions



### One Device, 3 Working Modes

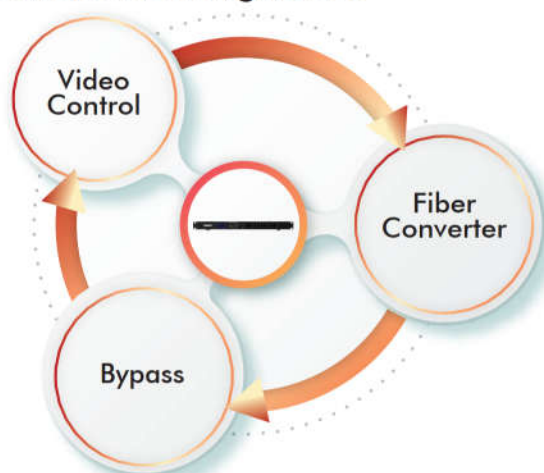

Video Processor Videotron Indoor Series 6.5M is all-in-one controller integrates video processing and video control into one device that powerful video processing and sending capabilities can be widely used in applications such as medium and high-end rental, stage control systems, and fine-pitch LED screens. It can drive up to 6.5 million pixels, with the maximum output width and height up to 10,240 pixels and 8192 pixels. In addition, the device features stepless output scaling, low latency, pixel-level brightness and chroma calibration, and more, to present you with an excellent image display experience.

### OUTSTANDING IMAGE QUALITY, 4K with 3 Layers



## Features



Web & Mobile Control



Large Loading Capacity



3 Working Modes



Multiple Kinds of Hot Backup



Pixel Level Brightness & Chroma Calibration



Low Latency



Genlock



4K 60FPS



Easy Preset Saving and Loading



3x Adjustable Layers

FRONT



REAR



## Specification

Model	SL-VP6.5-I
Loading Capacity	6.500.000 Pixels
Input Connectors	<ul style="list-style-type: none"> <li>- 1x HDMI 1.4 (IN &amp; LOOP)</li> <li>- 1x HDMI 1.4</li> <li>- 1x DVI (IN &amp; LOOP)</li> <li>- 1x DVI</li> <li>- 1x 3G-SDI (IN &amp; LOOP)</li> </ul> <p>Max. input resolution: 1920×1080@60Hz Deinterlacing processing supported</p>
Output Connectors	<ul style="list-style-type: none"> <li>-10x Gigabit Ethernet ports A single device unit drives up to 6.5 million pixels, with a maximum width of 10,240 pixels and a maximum height of 8192 pixels.</li> <li>- 2x Fiber outputs OPT 1 copies the output on 10 Ethernet ports. OPT 2 copies or backs up the output on 10 Ethernet ports.</li> <li>- 1x HDMI 1.3 For monitoring or video output</li> </ul>
Control Connectors	Ethernet, USB 2.0 (Type-A & Type-B), GENLOCK IN-LOOP
Rated Power Consumption	28W
Power Connector	100–240V~, 1.5A, 50/60Hz
Weight	4 kg (net)