



HDMI Processor Video Wall



Rich Color

IPS hard screen, 16 million 700 thousand color display, showing the true image



FHD
Screen



178°
Visual
Screen



Super
Narrow
Bezel



LED
Backlight
Type




High
Brightness

Intelligent Split Screen


Screen intelligent splicing single screen arbitrary combination



1. Full Screen Display



2. Image Drag Function



3. Combination Display



4. Multiple Superimposed
Image




5. Multiple Image Cruise



6. Single Screen Display

Super Narrow Bezel


Virtually seamless appearance with bezel,
Three kinds of bezels available
0.88 mm

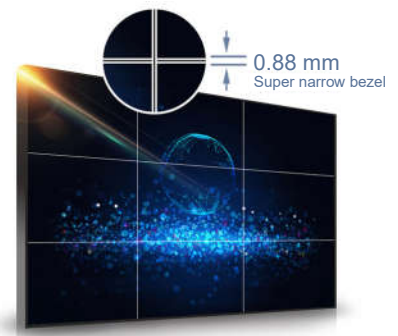

Ultra Wide Viewing Angle

Satisfy all angles of appreciation



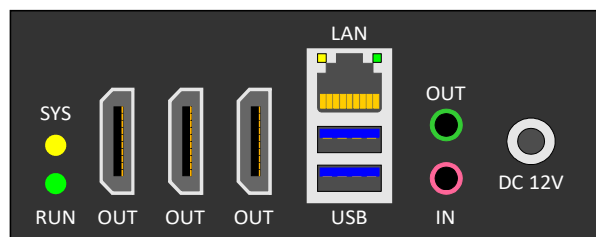

Model

SL-HDMI-O3

Matrix

CPU

Intel 64 Bit Multi Core Processors

Memory

8Gb DDR3

System Disk

High Performance Solid State Disk

Motherboard

High Performance Intel Chipset

TV Coder

High Performance Core Decoder

Video Output

Interface

3 Display

Resolution (Pixels)

1920*1080 (FHD)

Bit Rate

Support Main Stream & Sub Stream (Self Adaption)

Frame Rate

1-30 Fps

External Interface

USB Interface

2* USB 3.0

Video Interface

3* HDMI Out

Audio Interface

1* Audio In & 1* Audio Out

Network Interface

1* 1000 Mbps Ethernet Interface Out

Power Supply

Voltage

12V, 3A

Power Consumption

≤36W

Physical

Weight

≤1.45Kg

Dimensions (V*H*W)

130 * 50 * 200mm

Working Temperature

-10°C up to 55°C

Working Humidity

10%-90%

