HPF

3D LED Videotron P4 Outdoor

DATASHEET

Specifically designed for outdoor use, LED display lineup offers high-end performance at competitive prices. Using the finest quality components available today, the lightweight yet rugged tiles ensure excellent image quality and flicker-free video. The unique all-weather design guarantees reliability under the toughest operating conditions

Cabinet

Corner Cabinet

Features

Icon	Feature
4 mm PIXEL PITCH	Physical pixel pitch of the tile
GREEN ENERGY	Super Energy Saving
Fe CABINET	Iron metal die-cast cabinet
SALT SPRAY RESISTANT	Tested with HPF's proprietary salt spray test program
FLICKER FREE	Designed with a high refresh rate to eliminate screen flicker
IP65 CABINET	Ingress Protection 65
UV RESISTANT	UV Resistant
CALIBRATION	On-site color calibration
QUIET	Fanless or very low noise
VIEWING DISTACE	Viewing Distance ≥ 4 m
SMD NATIONSTAR	Nationstar surface LEDs
ANTI-AGING	Support aging compensation

HPF

Cabinet
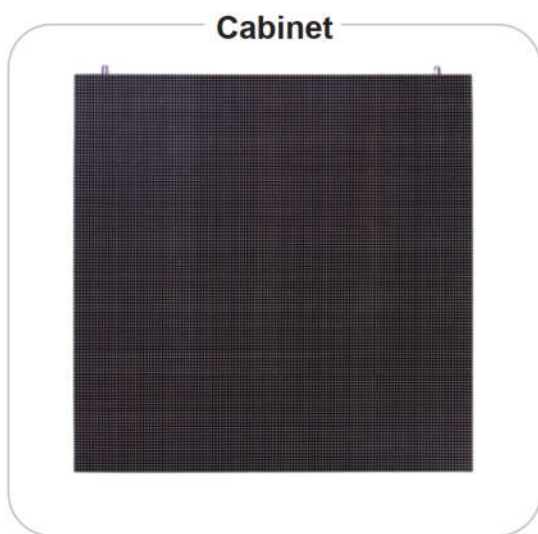
Corner Cabinet

Specification

Model	SL-P4.3D-O
Drive Mode	1/10 Scan
Pixel Pitch	4 mm
LED Chip	Nationstar
LED Configuration	1PR1PG1PB
Pixel Density	62.500 dots/sqm
Conventional Cabinet Size	960*960*90 mm
Corner Cabinet Size	320*960*90 mm
Material	Iron Die-Casting
Brightness	5800 cd/m²
Voltage	AC220V ± 10%
Maximum Power	900 w/sqm
Average Power	300 w/sqm
View Angle	140° (H), 140° (V)
Viewing Distance	≥ 4 m
Refresh Rate	≥3840 Hz
Gray Level	16 bits
Temperature Operation	-10°C ~ 60°C
Humidity Operation	10% ~ 85%
Ingress Protection	IP65
Cabinet Weight	18 Kg