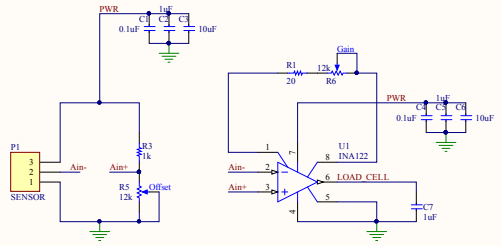



NOTES:

IADC SINGLE ENDED
IADC GAIN = 1
IADC INPUT ANALOG 0 (AIN0)
IADC LOW SAMPLING 20Hz
PWR = 3.3 V (STABLE)
CAPACITORS CLOSE AS POSIBLE TO AMP
OSCILOSCOPE PROBE X10 (PIN 6 AMP)
IADC 20 BIT RESOLUTION
IADC Vref= 3V

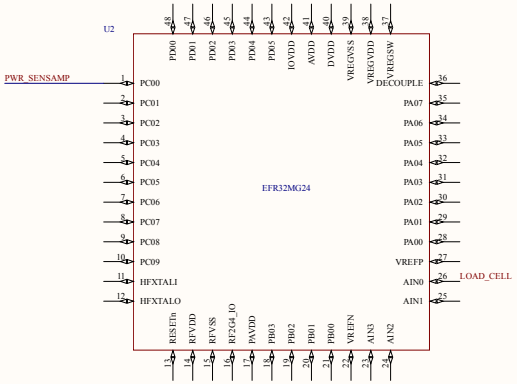

Title		
Size A2	Number	Revision
Date: 02/02/2025	Sheet of	
File: C:\Users\...\SPANNUNG_BLE_1.SchDoc	Drawn By:	