
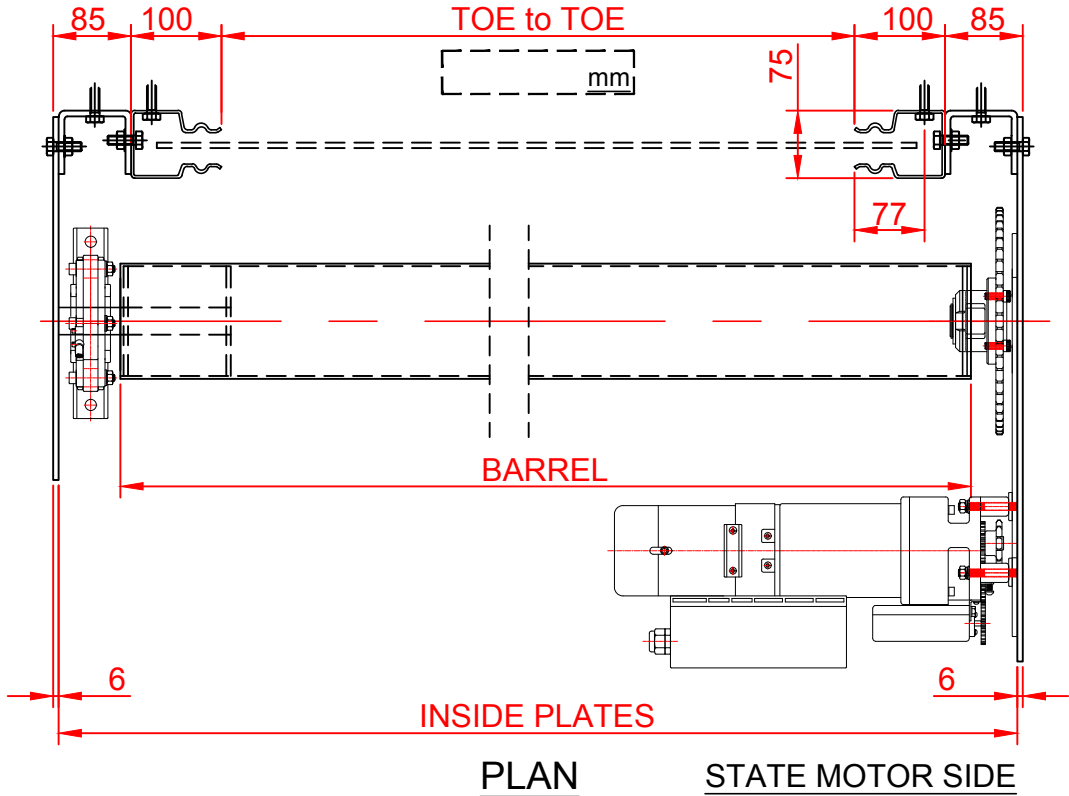


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS DBI101 SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
TIE BARS	YES/NO		
SILL ANGLE	YES/NO		
	SIZE:		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE			
PHOTOCELLS			
COIL CASING			
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div><div>FORTRESS</div><div>SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div></div><div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div><div>EMAIL: INFO@FORTRESS-SEFA.COM</div><div>WWW.FORTRESS-SEFA.COM</div></div></div></div></div>			
		05_DBi101_NBS_V6 2016_REV2 _ 1.7.19	

Type: DBi101 Industrial Roller Shutter 3phase



GUIDE /PLATE DETAILS


CURTAIN UNDER 18.5M2:

BARREL Ø127 JM CLEAR OPENING HEIGHT 0-3000 'X'=600, 'Y'=450
BARREL Ø127 JM CLEAR OPENING HEIGHT 3000-4000 'X'=750, 'Y'=500

CURTAIN OVER 18.5M2, UP TO 36M2:

BARREL Ø159 JM CLEAR OPENING HEIGHT 4000-5000 X'=750, 'Y'=500
BARREL Ø159 JM CLEAR OPENING HEIGHT 5000-6000 X'=800, 'Y'=600

MAX SIZE 6000*6000 SIZES OVER CONTACT D/O
**WIDTH RESTRICTION OVER 4M - CONTACT D/O

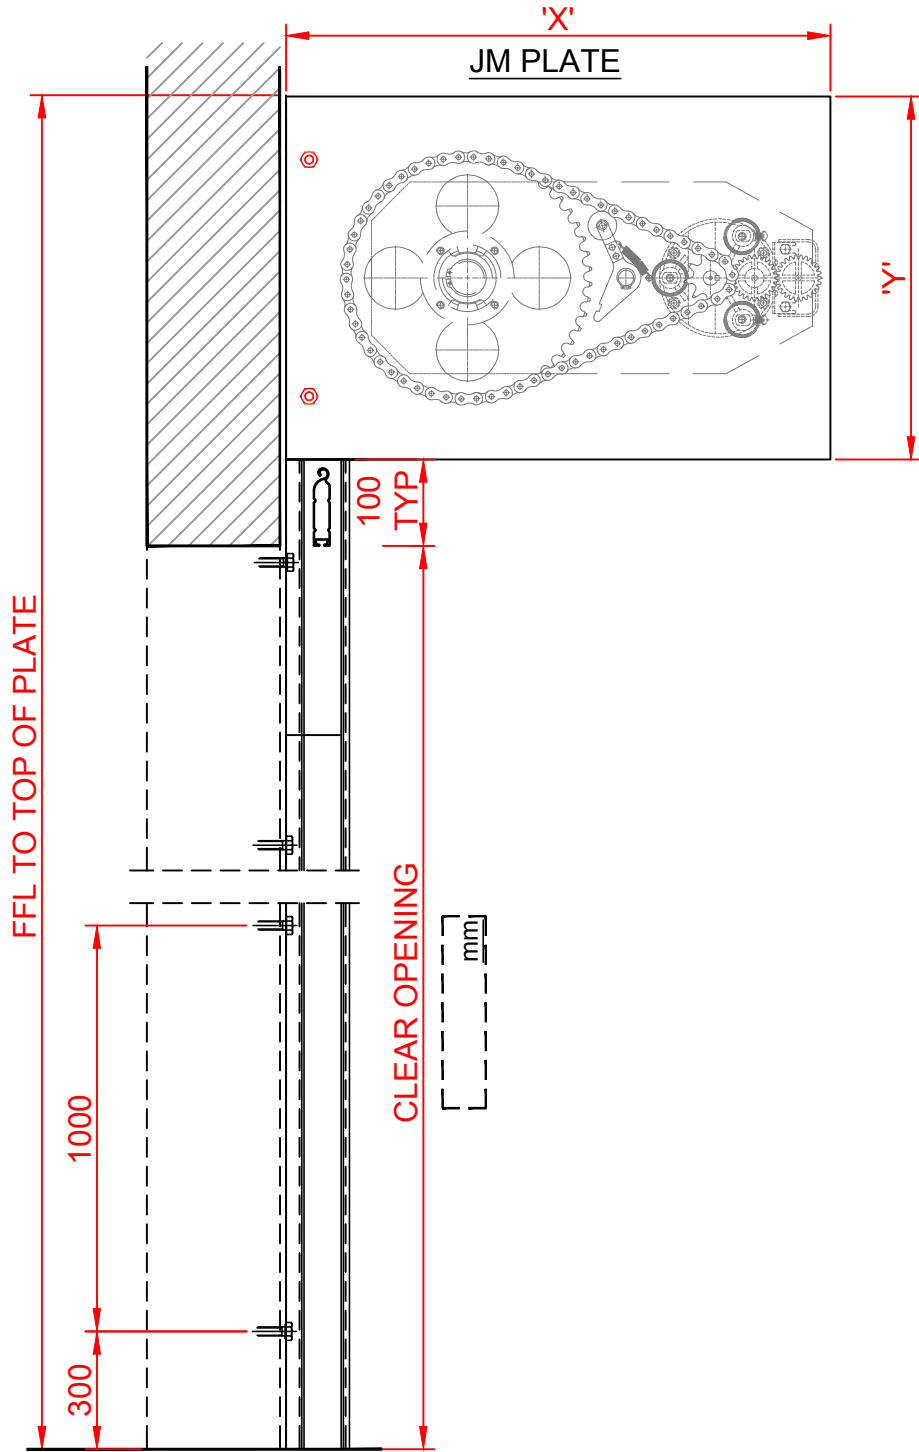

NOTE:
ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS DO NOT COME AS STANDARD
MOTOR HOODS DO NOT COME AS STANDARD
CASING SUPPORT BRACKETS WILL BE SUPPLIED IN WIDTHS OVER 2.5M ON DBIF ONLY
CURTAIN ONLY WILL BE PPC COATED AS STANDARD

DIRECT DRIVE MOTORS DO NOT REQUIRE A SAFETY BRAKE.
JM SETUPS *DO* REQUIRE A SAFETY BRAKE

SKETCHES, NOTES & DETAILS – STEELWORK/ANGLES ETC