
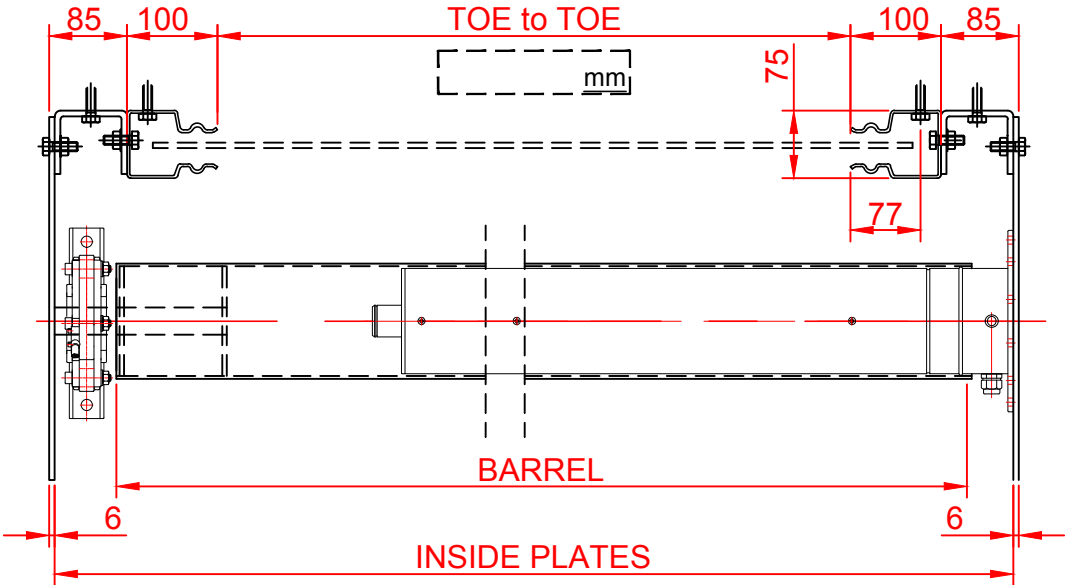


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS DB100-IBM SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
TIE BARS	YES/NO		
SILL ANGLE	YES/NO		
	SIZE:		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE (DB)			
PHOTOCELLS (DB)			
COIL CASING (DB/DBF)			
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div><div><div>FORTRESS</div><div>SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div></div></div><div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>			
01b_DB100_IBM_NBS_V6 2016_REV2 _ 1.7.19			

Type: DB100 Industrial Roller Shutter - IBM 1phase




PLAN STATE MOTOR SIDE

GUIDE /PLATE DETAILS

IBM CLEAR OPENING HEIGHT 0-2500 'X'=350, 'Y'=350
IBM CLEAR OPENING HEIGHT 2500-3500 'X'=400, 'Y'=400**
IBM CLEAR OPENING HEIGHT 3500-4200 'X'=450, 'Y'=450**
IBM CLEAR OPENING HEIGHT 4200+ 'X'=500, 'Y'=500**

MAX SIZE 6000*6000 SIZES OVER CONTACT D/O
**WIDTH RESTRICTION OVER 4M - CONTACT D/O

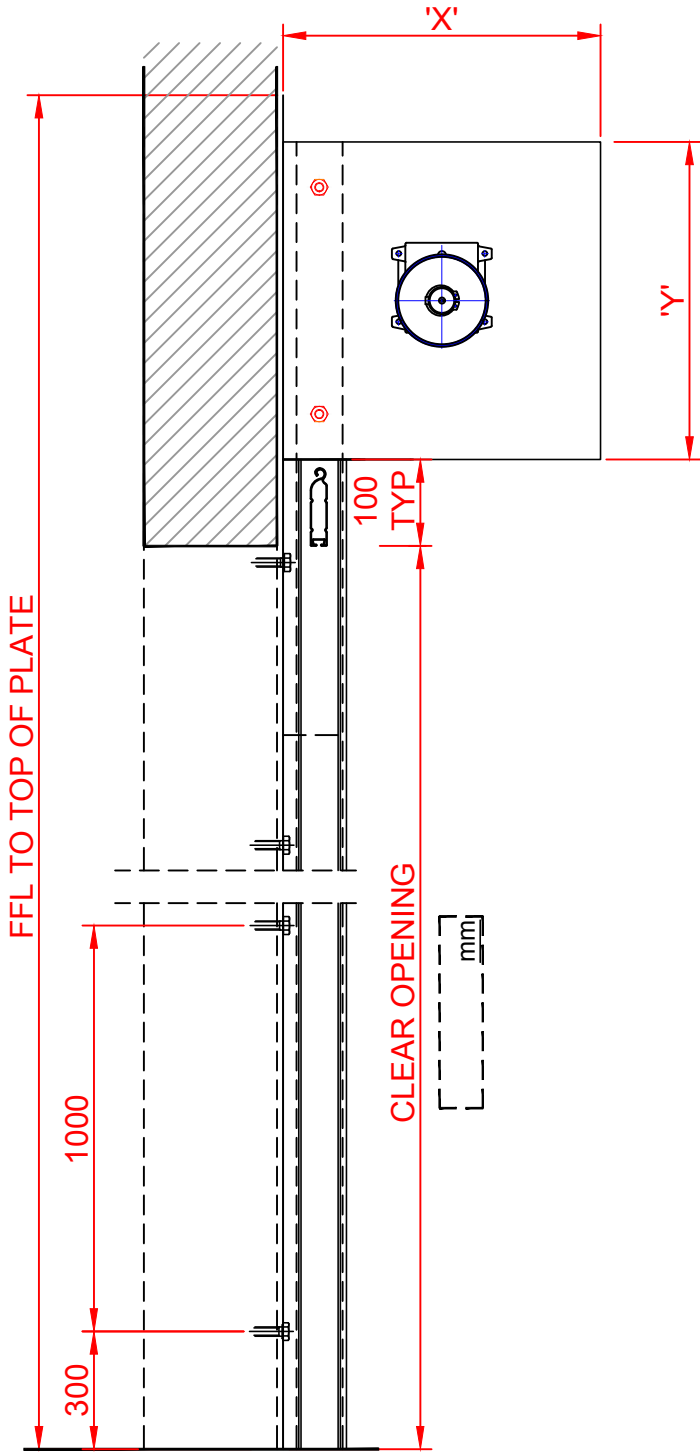

NOTE:
ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS DO NOT COME AS STANDARD
MOTOR HOODS DO NOT COME AS STANDARD
CURTAIN ONLY WILL BE PPC COATED AS STANDARD

DIRECT DRIVE MOTORS DO NOT REQUIRE A SAFETY BRAKE.
JM SETUPS *DO* REQUIRE A SAFETY BRAKE