


SALES ORDER:		DATE:	FITTING DATE:	
FORTRESS DBF75 SURVEY				
CUSTOMER:				
JOB TITLE:				
SITE ADDRESS:				
DOOR REF		INTERNAL	EXTERNAL	
MEASURED BY		DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION				
FIXING TO				
KEYSWITCH DEADMAN	INSIDE			
	OUTSIDE			
PUSH BTN DEADMAN	INSIDE			
	OUTSIDE			
IMPULSE	RADAR			
	IND. LOOP			
	FOBS			
	*SPECIAL			
FIRE LINK	FUSIBLE PANEL			
SILL ANGLE	SIZE:			
FITTING ANGLES				
DETAIL OPPOSITE				
SAFETY EDGE (DB)				
PHOTOCELL'S (DB)				
COIL CASING				
FASCIA				
MOTOR HOOD				
FIRE RATING				
COLOUR/FINISH				
FLASHINGS	INSIDE			
	OUTSIDE			
OTHER ITEMS:				
<div><div><div></div><div><div>F</div><div>FORTRESS SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div></div><div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div></div>				
03_DBF75_NBS_V6 2016_ REV2 _ 1.7.19				

Type: DBF75 Industrial Roller Shutter - 3phase/Single phase

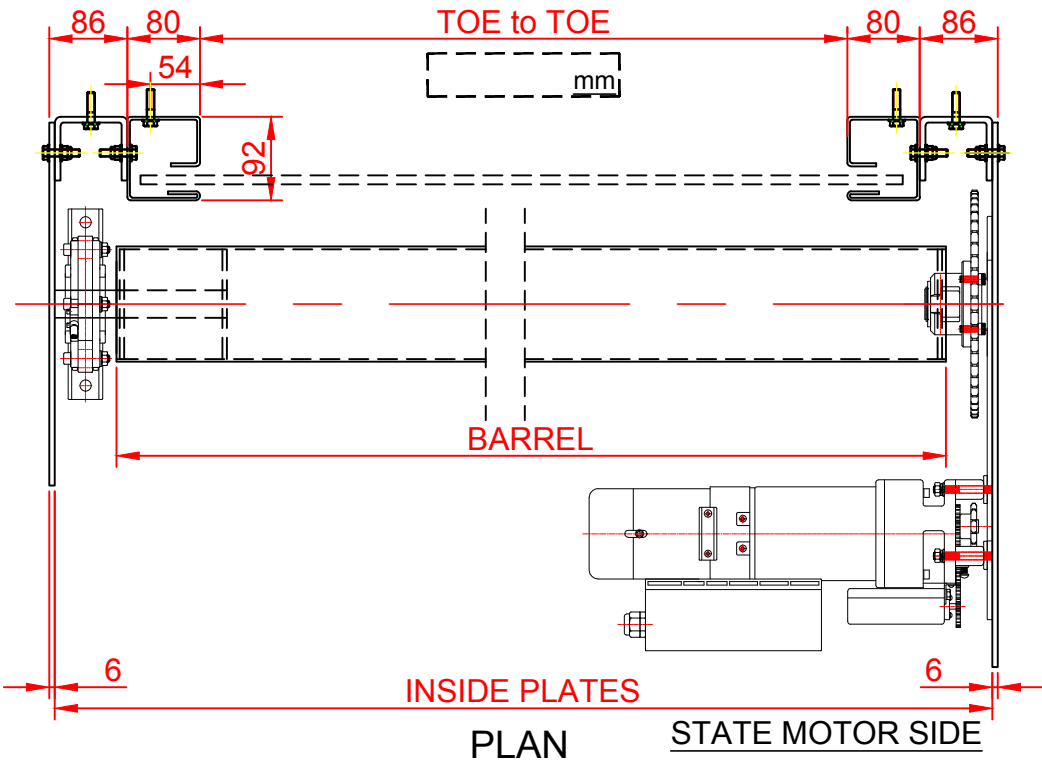

TYPICAL PLATE SIZE

MOTOR:
JM500 600x400
JM1000 750x450

IDLER:
400x400 or 450x450

DBF MAX SIZE: 30m2 (CURTAIN)


FACE FIX ☐

REVEAL FIX ☐

NOTE:
** 1PHASE MOTOR AVAILABLE UP TO JM750 MOTOR
** JM500 MAX LIFT HEIGHT 5.5M (BP-5) **
** JM500 MAX LIFT HEIGHT 4.5M (BP-8) **

SKETCHES, NOTES & DETAILS – STEELWORK/ANGLES ETC

JM-UP TO: 6m High

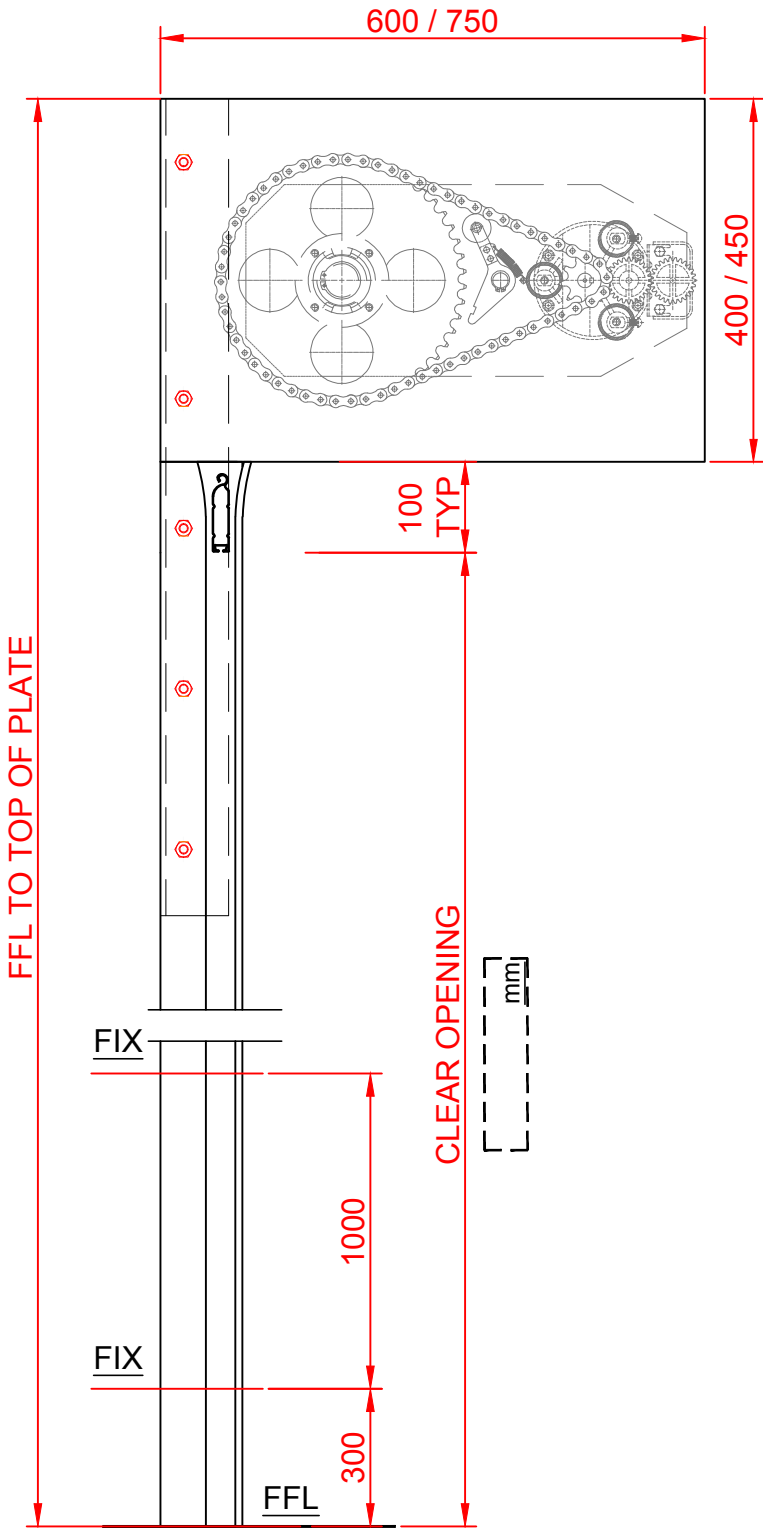

SECTION

NOTE:
ALL NON FIRE RATED SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS AS STANDARD WITH DBF75.
MOTOR HOODS DO NOT COME AS STANDARD WITH DB/DBF75
CASING SUPPORT BRACKETS WILL BE SUPPLIED IN WIDTHS OVER 3M ON DBF75 ONLY
CURTAIN ONLY WILL BE PPC COATED AS STANDARD